


### BILL OF MATERIAL

BAR	NUMBER OF BARS		TOTAL	SIZE	LENGTH	SHAPE
	STAGE I	STAGE II				
a6(E)	18		18	#7	29' - 7"	—
a7(E)	30	20	50	#6	7' - 1"	—
a8(E)		18	18	#7	24' - 4"	—
a9(E)		10	10	#6	4' - 10"	—
d(E)	12	12	24	#5	3' - 1"	┘
d1(E)	12	12	24	#5	5' - 4"	┘
d2(E)	12	12	24	#4	2' - 1"	┘
h4(E)	4		4	#6	28' - 11"	—
h5(E)		4	4	#6	23' - 5"	—
x1(E)	96	80	176	#6	6' - 11"	┘
CONCRETE REMOVAL					CU. YD.	26.9
REINFORCEMENT BARS (EPOXY COATED)					POUND	4980
CONCRETE SUPERSTRUCTURE					CU. YD.	26.9

Note: Trim existing joint reinforcement to accommodate new joint opening. (Typ.)

4" @ 50°F E. Abut.  
2 1/2" @ 50°F W. Abut.

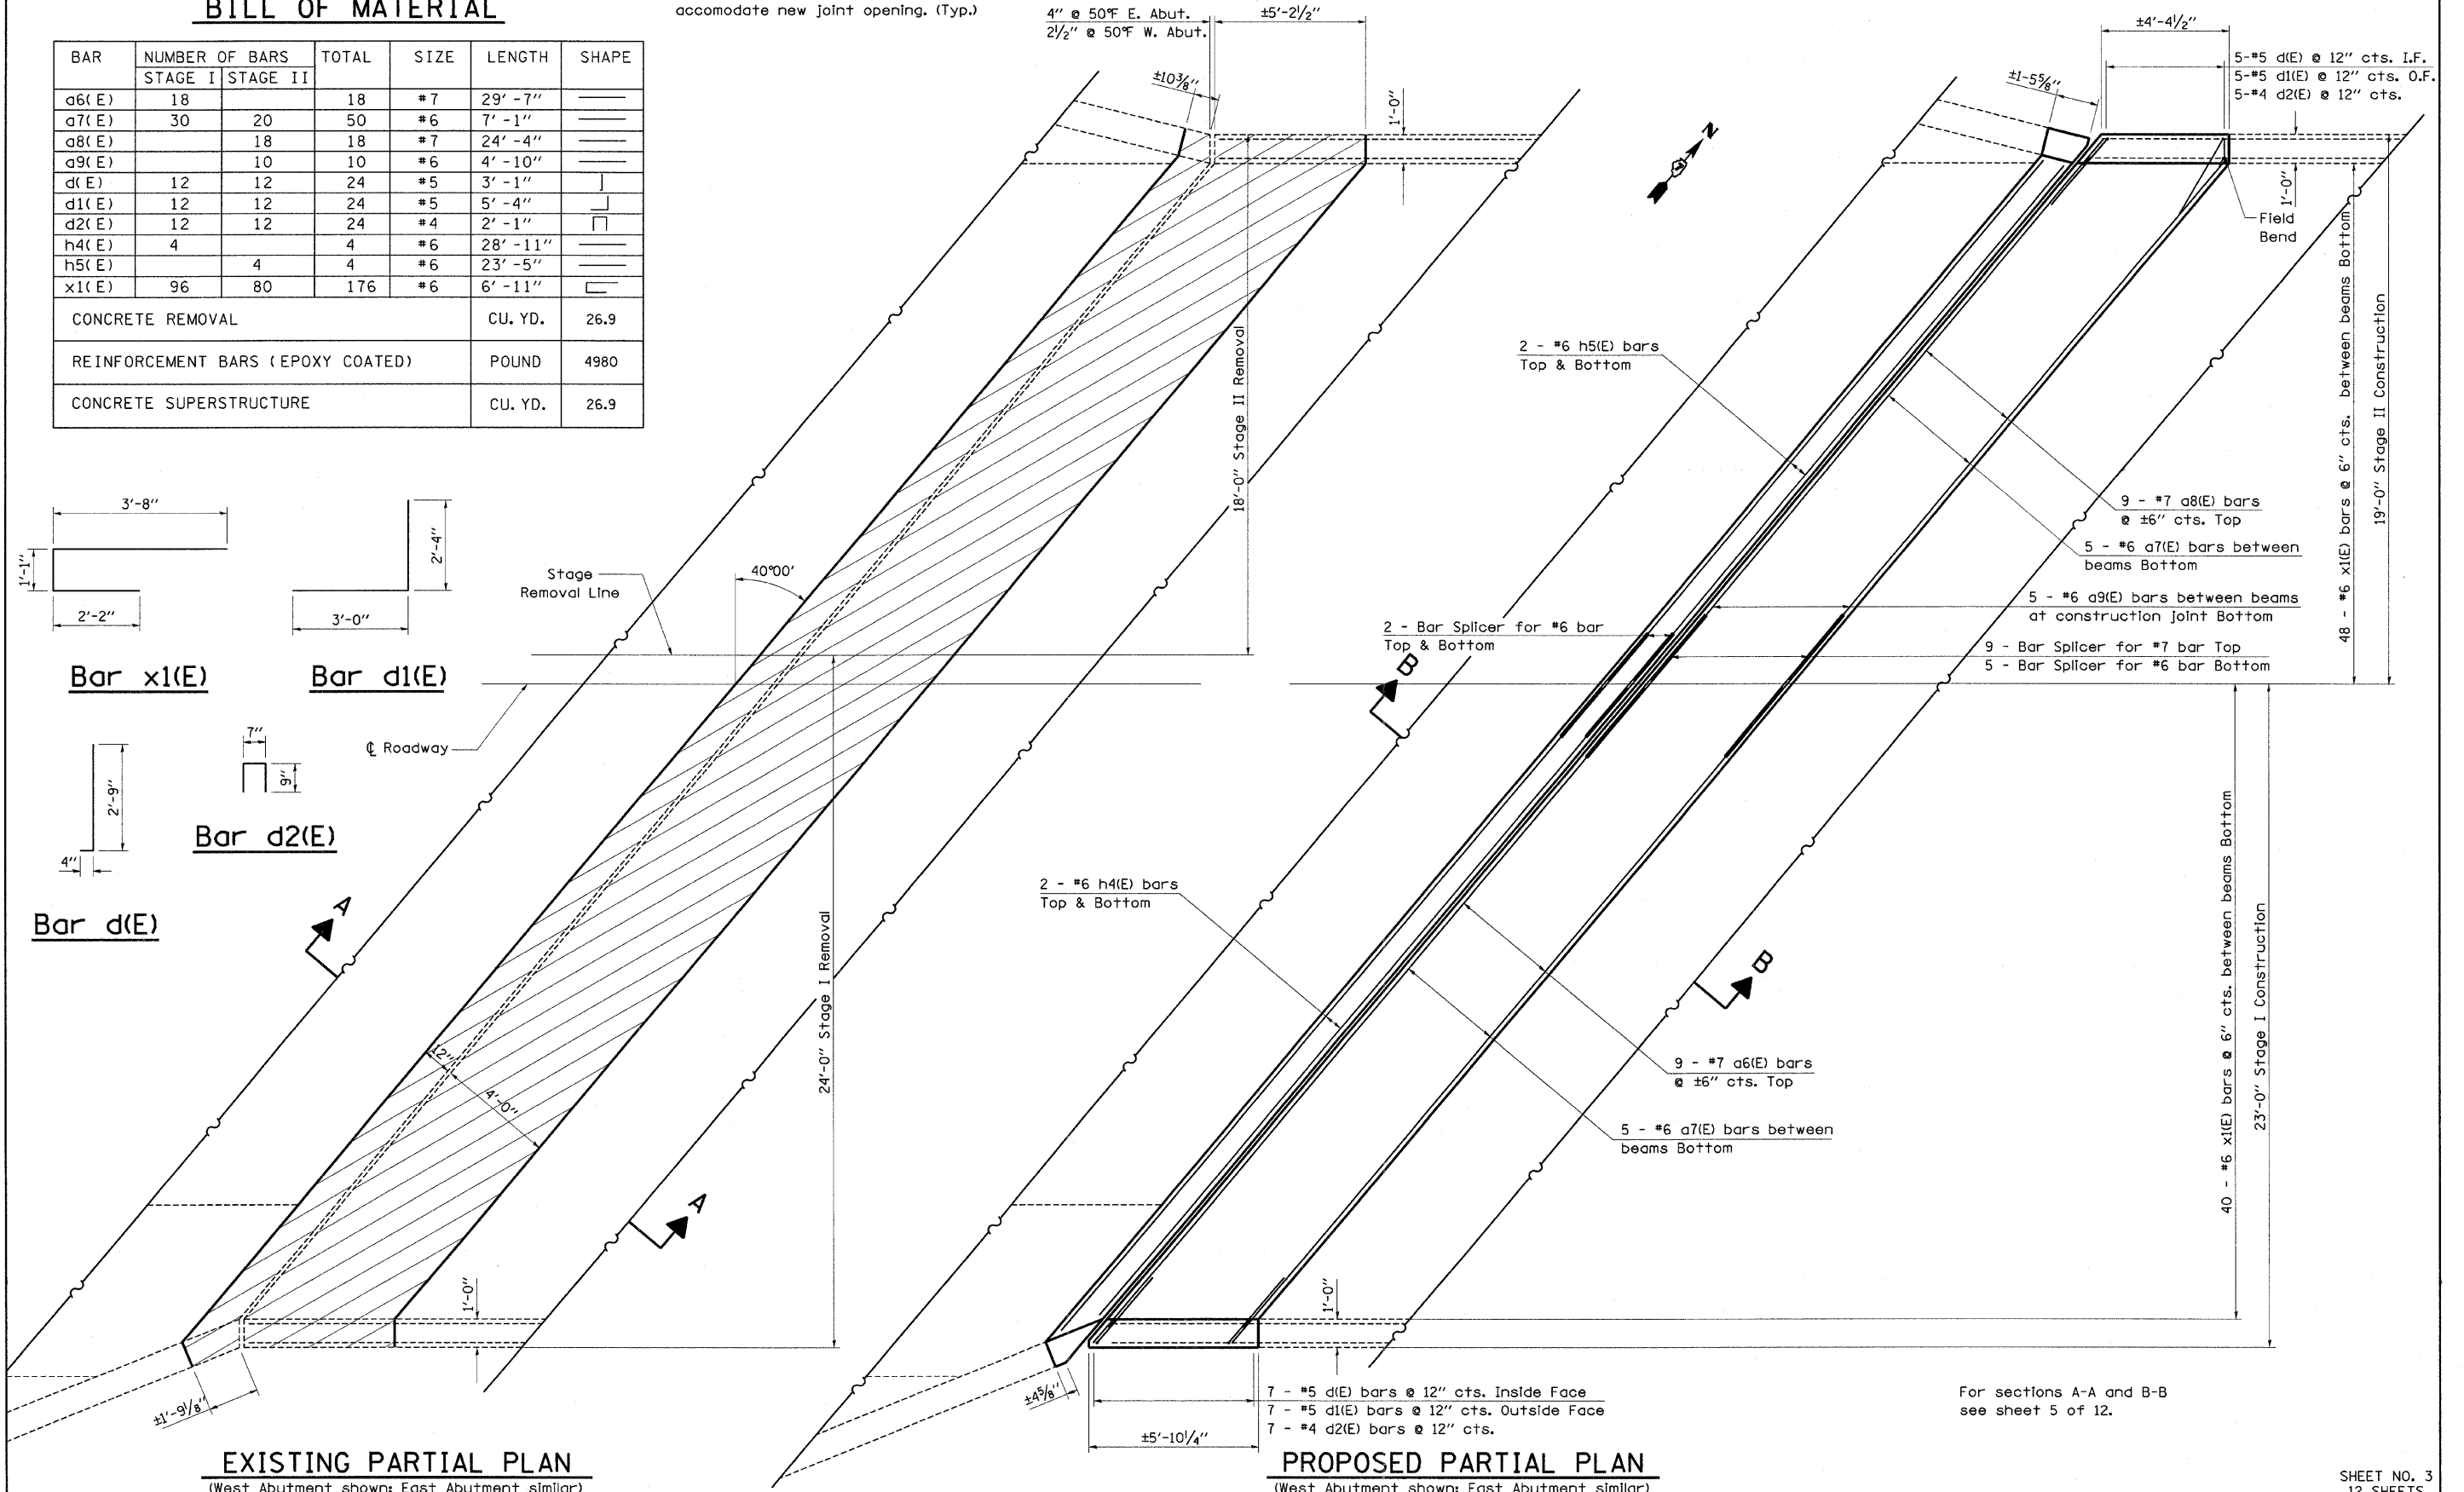

**EXISTING PARTIAL PLAN**  
(West Abutment shown; East Abutment similar)

**PROPOSED PARTIAL PLAN**  
(West Abutment shown; East Abutment similar)

For sections A-A and B-B see sheet 5 of 12.