



GENERAL NOTES


Plan dimensions and details relative to existing plans are subject to routine variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensations for a change in scope of the work; however, the Contractor will be paid for the quantity actually furnished based upon the unit price bid for the work. Layout of the slope protection system may be varied to suit ground conditions in the field as directed by the Engineer.

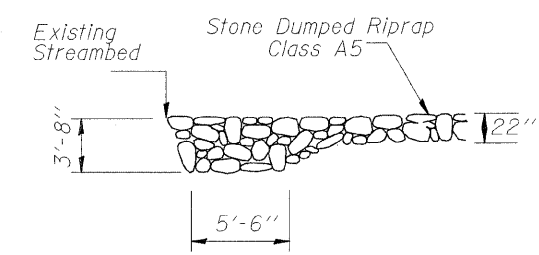

SECTION A-A

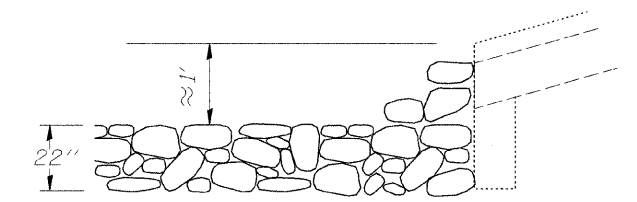

SECTION B-B

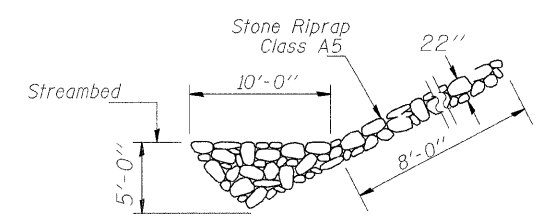

SECTION C-C

BILL OF MATERIALS

ITEM DESCRIPTION	UNIT	QUANTITY
Stone Dumped Riprap, Class A5	TONS	538
Channel Excavation	CU YD	317

FILE NAME =	USER NAME = swartzw	DESIGNED -	REVISED -
cs:\pw\work\pwwdot\swartzw\dms53031\shd\ta19_74158.dgn		DRAWN -	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

RIPRAP DETAILS STR# 015-0009 & 015-0010

SCALE: 20 SHEET NO. 1 OF 1 SHEETS STA. 1175+25.99 TO STA. 1176+34.01

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	15(22,23,24,25,26)RS-3	COLES	87	51A
FED. ROAD DIST. NO.			ILLINOIS FED. AID PROJECT	
CONTRACT NO. 74158				