



Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

April 8, 2009

SUBJECT: FAS Route 674 (Fish Hatchery Rd.)
Project ESP-0674 (111)
Section 28BR
Coles County
Contract No. 74172
Item No. 227, April 24, 2009 Letting
Addendum A

NOTICE TO PROSPECTIVE BIDDERS:

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

1. Revised pages i and ii of the Table of Contents to the Special Provisions.
2. Revised pages 6 - 8 of the Special Provisions.
3. Added pages 89 - 94 to the Special Provisions.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Very truly yours,

Charles J. Ingersoll, Chief
Bureau of Design and Environment

A handwritten signature in cursive script, appearing to read "Ted B. Walschleger".

By: Ted B. Walschleger, P. E.
Engineer of Project Management

cc: Roger Driskell, Region 4, District 7; Bill Frey; R. E. Anderson; Estimates

TBW:DB:jc

TABLE OF CONTENTS

LOCATION OF PROJECT 1
DESCRIPTION OF PROJECT 1
COMPLETION DATE 1
TRAFFIC CONTROL PLAN 1
ROAD CLOSURE 3
NOTIFICATION OF ROAD CLOSURE 3
PAVEMENT PATCHING (FULL DEPTH) 3
ROCKFILL - REPLACEMENT 3
EMBANKMENT 4
SEEDING, CLASS 2 (SPECIAL) 5
INCIDENTAL HOT-MIX ASPHALT SURFACING 5
ALKALI-SILICA REACTION FOR PRECAST AND PRECAST PRESTRESSED CONCRETE (BDE) 9
APPROVAL OF PROPOSED BORROW AREAS, USE AREAS, AND/OR WASTE AREAS INSIDE ILLINOIS STATE BORDERS (BDE) 11
AUTOMATED FLAGGER ASSISTANCE DEVICES (BDE) 11
CEMENT (BDE) 13
CONCRETE ADMIXTURES (BDE) 15
CONSTRUCTION AIR QUALITY – DIESEL VEHICLE EMISSIONS CONTROL (BDE) 18
CONSTRUCTION AIR QUALITY - IDLING RESTRICTIONS (BDE) 20
DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (BDE) 21
EQUIPMENT RENTAL RATES (BDE) 28
FLAGGER AT SIDE ROADS AND ENTRANCES (BDE) 29
HOT-MIX ASPHALT - FIELD VOIDS IN THE MINERAL AGGREGATE (BDE) 30
HOT-MIX ASPHALT – PLANT TEST FREQUENCY (BDE) 31
HOT-MIX ASPHALT – TRANSPORTATION (BDE) 32
LIQUIDATED DAMAGES (BDE) 33
METAL HARDWARE CAST INTO CONCRETE (BDE) 33
MONTHLY EMPLOYMENT REPORT (BDE) 34
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM / EROSION AND SEDIMENT CONTROL DEFICIENCY DEDUCTION (BDE) 36
PAYMENTS TO SUBCONTRACTORS (BDE) 36
PAYROLLS AND PAYROLL RECORDS (BDE) 37
PERSONAL PROTECTIVE EQUIPMENT (BDE) 39

Revised 04/08/2009

PLASTIC BLOCKOUTS FOR GUARDRAIL (BDE) 39
PRECAST CONCRETE HANDLING HOLES (BDE) 39
RECLAIMED ASPHALT PAVEMENT (RAP) (BDE) 41
REFLECTIVE SHEETING ON CHANNELIZING DEVICES (BDE) 47
REINFORCEMENT BARS (BDE) 48
REINFORCEMENT BARS - STORAGE AND PROTECTION (BDE)..... 49
SEEDING (BDE) 49
SELF-CONSOLIDATING CONCRETE FOR PRECAST PRODUCTS (BDE)..... 51
SILT FILTER FENCE (BDE) 52
STEEL PLATE BEAM GUARDRAIL (BDE) 52
STONE GRADATION TESTING (BDE)..... 52
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE) 53
TEMPORARY EROSION CONTROL (BDE) 53
AMERICAN RECOVERY AND REINVESTMENT ACT PROVISIONS (BDE) 54
404 PERMIT 55
NATIONWIDE PERMITS AND CONDITIONS..... 58
IEPA REGIONAL CONDITIONS..... 71
AMERICAN RECOVERY AND REINVESTMENT ACT SIGNING (BDE) 89

Revised 04/08/2009

This page intentionally left blank

Deleted 04/08/2009

This page intentionally left blank

Deleted 04/08/2009

This page intentionally left blank

Deleted 04/08/2009

AMERICAN RECOVERY AND REINVESTMENT ACT SIGNING (BDE)

Effective: April 1, 2009

Revised: April 2, 2009

Description. This work shall consist of furnishing, fabricating and installing sign panels, complete with sign faces, legend, and supplemental panels according to Section 720 of the Standard Specifications and as specified herein.

Materials. The “Putting America to Work” sign shall be fabricated using Type AP fluorescent orange sheeting for the background material with black vinyl or black opaque ink legend, symbol and borders. The “American Recovery and Reinvestment Act” sign shall be fabricated using Type AP green sheeting for the background with Type AP white sheeting for the legend and border. A green translucent overlay film may also be used over white Type AP sheeting to fabricate the “American Recovery and Reinvestment Act” sign.

Sign Layout. See following attachment. The “Putting America to Work” sign shall be 84 in. x 18 in. The “American Recovery and Reinvestment Act” sign shall be 84 in x 60 in.

General. The signs shall be erected to applicable portions of Article 701.14 of the Standard Specifications. These signs shall be erected midway between the first and second warning signs as required by the traffic control plan and standards utilized for this project. If the second warning sign is defining a moving or intermittent operation, the sign may be maintained at a distance of 500 ft (150 m) beyond the first post mounted ROAD CONSTRUCTION AHEAD sign. The signs shall remain in place for the duration of the project. Upon completion of the project, the signs and posts shall be removed and shall remain the property of the Contractor.

Basis of Payment. This work will not be paid for separately but shall be included in the cost of Traffic Control items as shown on the plans.

Added 04/08/2009


**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



PROJECT FUNDING SOURCE
SIGN ASSEMBLY

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
 AMERICAN RECOVERY AND REINVESTMENT ACT
 SIGN LAYOUT DETAILS**

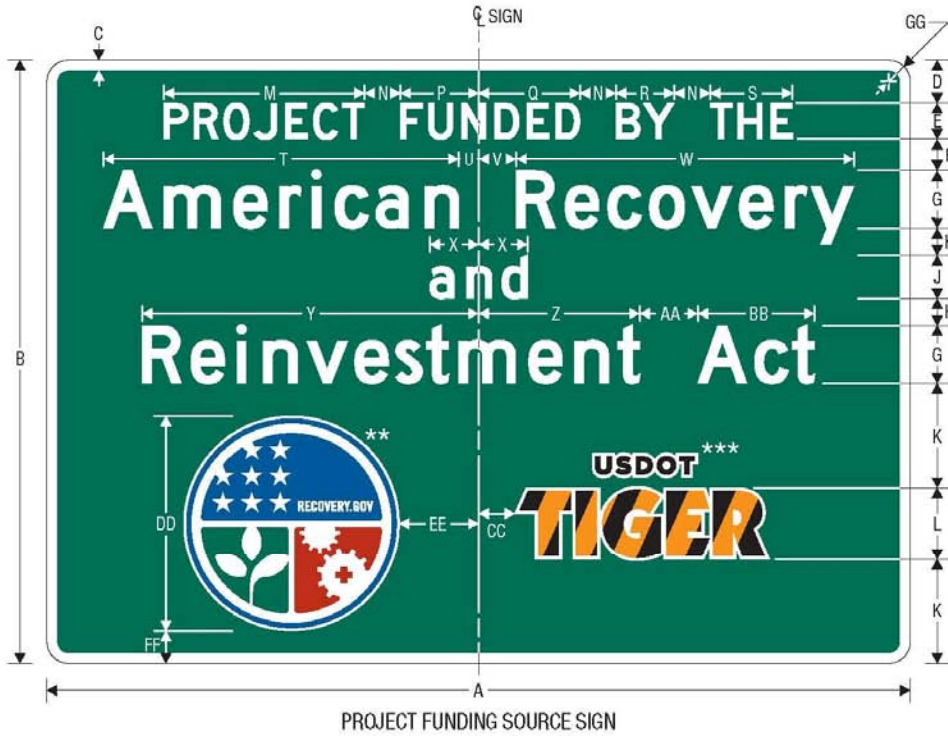

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE

Dimensions in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	84	1.5	6	5 D	4.5	8 D*	3.75	6 D* (45 LC)	14.5	10	27.917	5	10.831
84	60	1	5	4 C	3.5	6 C*	3	4 D* (3 LC)	9.25	7	19.047	4	7.362

Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
14.087	8.106	11.556	49.42	2.742	5.258	46.904	6.812	46.76	22.472	8	16.288	5	30
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	4	21


EE	FF	GG
11	4.5	3
7.5	2.25	2.25

- * Increase character spacing 50%
- ** See Pictograph
- *** See Pictograph

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
 BACKGROUND — GREEN (RETROREFLECTIVE)

Added 04/08/2009

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

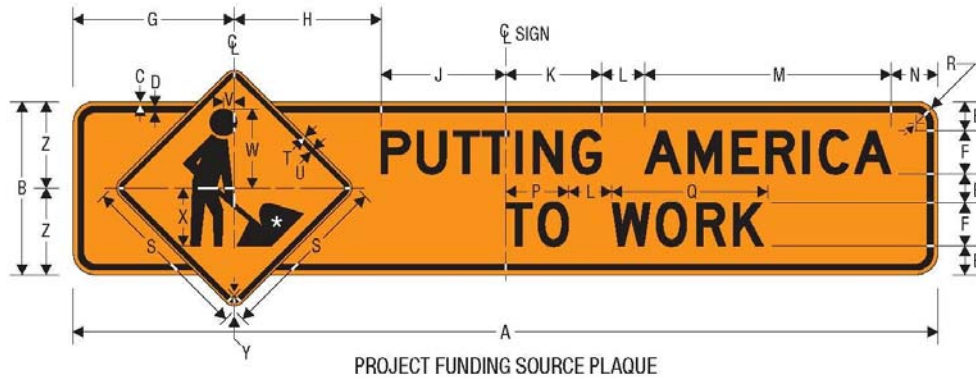

NOTE: PLAQUE SHALL NOT BE INSTALLED
 WITHOUT SIGN

* See *Standard Highway Signs*
 Page 6-59 for symbol design.

Dimensions in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	24	0.625	0.875	4	6 D	22.349	20.370	17.281	13.28	6	34.22	6.5	8.765
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
21.013	3	24	0.375	0.625	1.5	11	8	1.5	12
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK
 BACKGROUND — ORANGE (RETROREFLECTIVE)

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



RECOVERY
Vector-Based, Vinyl-Ready Pictograph

COLORS: LEGEND, OUTLINE	— WHITE (RETROREFLECTIVE)
BORDER	— BLUE (RETROREFLECTIVE)
BACKGROUND (UPPER)	— BLUE (RETROREFLECTIVE)
BACKGROUND (LOWER RIGHT)	— RED (RETROREFLECTIVE)
BACKGROUND (LOWER LEFT)	— GREEN (RETROREFLECTIVE)

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



USDOT TIGER
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE — WHITE (RETROREFLECTIVE)
USDOT LEGEND — BLACK
TIGER DIAGONALS — BLACK,
ORANGE (RETROREFLECTIVE)

Added 04/08/2009