

INDEX OF SHEETS

- 1 COVER SHEET, STANDARDS, & SUMMARY OF QUANTITIES
- 2 TYPICAL CROSS-SECTIONS, TANGENT & RUMBLE STRIP DETAILS
- 3 TRANSITION AT BRIDGES, END TAPER, AND SIDE ROAD DETAILS
- 4 ENTRANCE DETAILS
- 5 SCHEDULE OF RESURFACING QUANTITIES

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
342	03-00208-02-RS	LIVINGSTON	5	1

PROJECT NO. RS-0342(107)

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
LIVINGSTON COUNTY
PLANS FOR
**PROPOSED LOCAL AGENCY IMPROVEMENT
SURFACE TRANSPORTATION PROGRAM**
F.A.S. ROUTE 342, CH 03, SECTION 03-00208-02-RS
CHATSWORTH-MELVIN ROAD
PROJECT NO. RS-0342(107)
JOB NO. C-93-014-09

SUMMARY OF QUANTITIES		CONST. CODE I000	
ITEM NO.	ITEM	UNIT	QUANTITIES
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	4,413.0
40600300	AGGREGATE (PRIME COAT)	TON	237.0
* 40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	11,903.0
* 40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	10,395.0
40800010	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	186.0
* 40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	382.0
* 44000198	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQ YD	2,074.0
44300100	AREA REFLECTIVE CRACK CONTROL TREATMENT	SQ YD	117,449.0
* 48101200	AGGREGATE SHOULDERS, TYPE B	TON	7,435.0
60300105	FRAMES AND GRATES TO BE ADJUSTED	EACH	2.0
67100100	MOBILIZATION	L SUM	1.0
70101800	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1.0
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	6,536.0
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ FT	1,090.0
△ 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	35,460.0
* Z0055300	RUMBLE STRIP	EACH	4.0

△ SPECIALTY ITEMS

* SEE SPECIAL PROVISIONS

UTILITIES

CONTACT J.U.L.I.E. 811 or 800-892-0123 BEFORE DIGGING




STATE STANDARDS DETAILS

701306-02 701901-01
701311-03 BLR 24-2

△ STATION EQUATIONS	
53+55 BK.	53+73AH.
106+65 BK.	106+69.5 AH.
210+35.58 BK.	212+74.70 AH.
230+86.64 BK.	233+26.8 AH.
280+81.5 BK.	280+60 AH.
334+35 BK.	336+15 AH.

CHATSWORTH-MELVIN ROAD - COLLECTOR
POSTED SPEED = 55 MPH-RURAL
DESIGN SPEED = 50 MPH-RURAL
DESIGN ADT= 750/ YR 2017
CLASS IV ROADS, 73,280# DESIGN
15 YEAR D.P.

CONTRACT NO. 87375

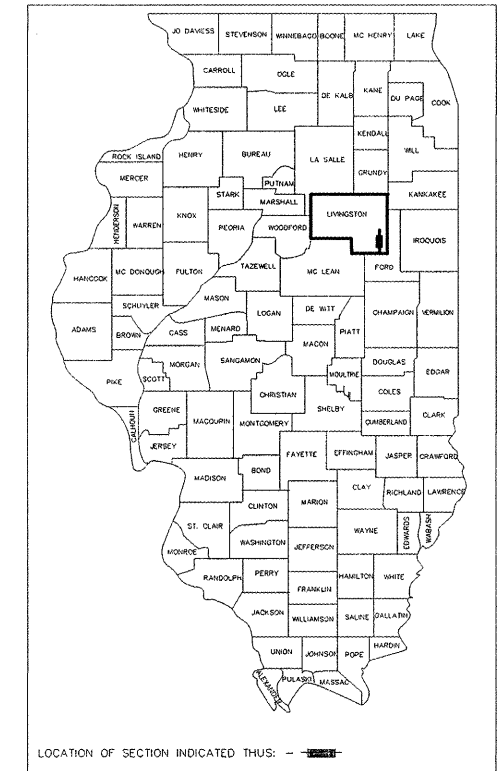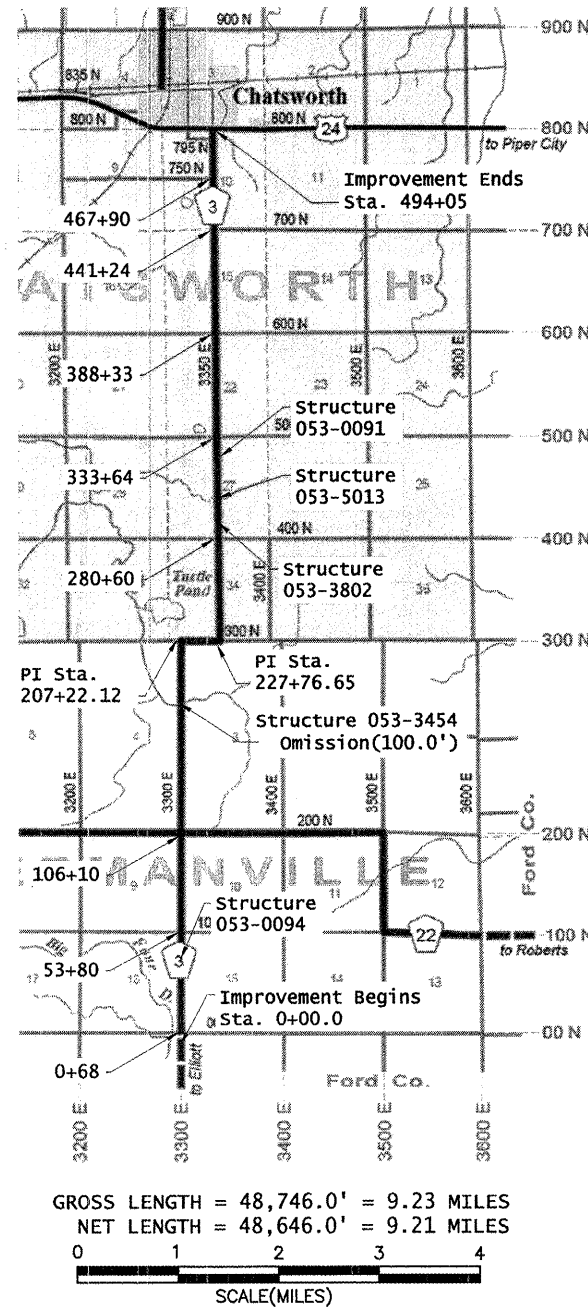

THESE PLANS WERE MADE BY ME OR BY A MEMBER OF MY STAFF WORKING UNDER MY PERSONAL SUPERVISION.

02/05/09 *David R. Winters*
DATE COUNTY ENGINEER, P.E. NO. 42921
EXPIRATION DATE 11/30/2009

"THE ACCEPTANCE OF THIS PROJECT IS BASED ON THE MINIMUM DESIGN CRITERIA UNDER THE LAPP POLICY."

APPROVED 02/05/2009
David R. Winters
LIVINGSTON COUNTY OFFICIAL

PASSED 2/10/2009
Harold R. Fry
DISTRICT ENGINEER OF LOCAL ROADS & STREETS

APPROVED 2/10/2009
George E. Ryan
DEPUTY DIRECTOR OF HIGHWAYS, REGIONAL ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

Z:\COWork\ROAD Projects\00208RS2-ChatSwrd-South\Planning\Plans\Plans.dwg, 2/5/2009 9:58:03 AM