
## NOTES: DESIGNER

## ROADWAY PROFILE ROADWAY CROSS SECTION VTFW VIFW

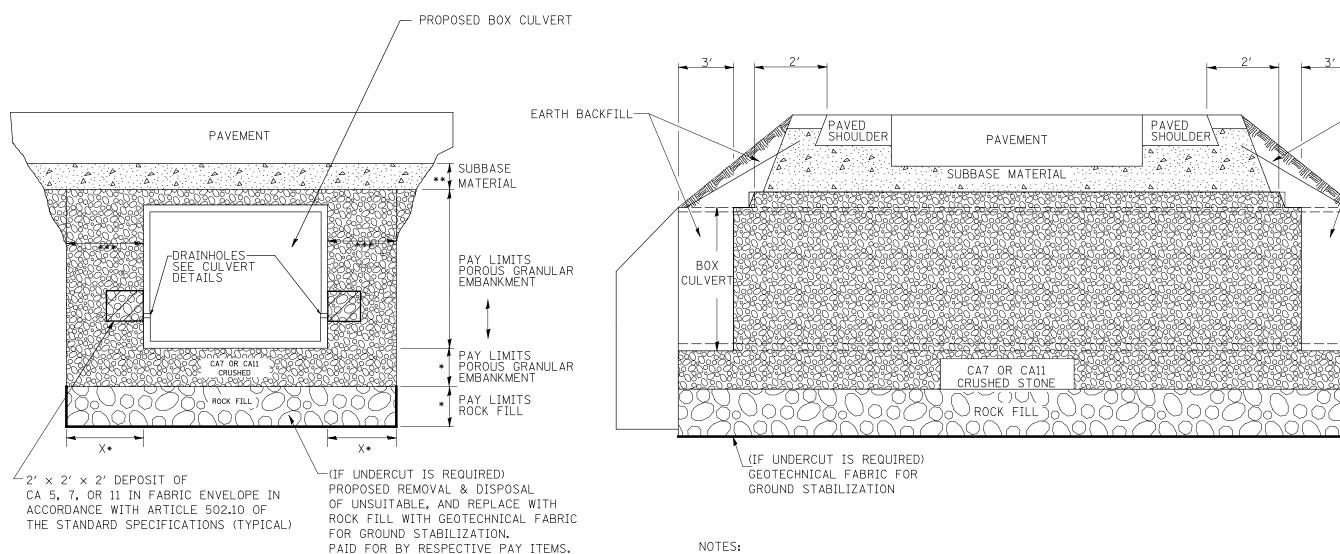

- \* IF APPLICABLE, SEE UNDERCUT DETAIL FOR DEPTHS AND WIDTHS. IF THERE IS NO UNDERCUT, X = 2 FEET AND SEE NOTE 3 THIS SHEET.
- \*\* SUBBASE SHALL BE 6" MINIMUM LAYER OF CA6 CRUSHED STONE OR OTHER MATERIAL AS SPECIFIED IN THE PLANS.
- \*\*\* PAY LIMITS OF POROUS GRANULAR EMBARKMENT SHALL BE 2 FEET UNLESS OTHERWISE SHOWN IN THE PLANS.

## NOTES:

- EXCEPT AS SPECIFIED IN THIS DETAIL, THE PLACEMENT AND COMPACTION OF BACKFILL SHALL BE IN ACCORDANCE WITH ARTICLE 502.10 OF THE STANDARD SPECIFICATIONS.
- POROUS GRANULAR EMBARKMENT SHALL BE PLACED IN ACCORDANCE WITH SECTION 207 OF THE STANDARD SPECIFICATIONS.
- IF NO UNDERCUT IS REQUIRED, A 6" MINIMUM LAYER OF POROUS GRANULAR EMBANKMENT SHALL BE PLACED BELOW THE ELEVATION OF THE BOTTOM OF BOX CULVERT.

All dimensions are in inches (millimeters) unless otherwise noted.

EARTH BACKFILL

6-12-12 CREATED NEW STD. R.D.		STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETAIL OF EXCAVATION AND BACKFILL FOR BOX CULVERTS	F.A.P RTE.	SECTION	COUNTY TOTAL SHI SHEETS N		
				407	(55-3)A	MCDONOUGH 671 3		
		DEFAILMENT OF THANGS OFFATION	NOT TO SCALE CADD STD. 540	000 FED. ROAD	FED. ROAD DIST. NO.   ILLINOIS   FED. AID   PROJECT			