

TYPICAL SECTION "A-A" LEGEND

"NOT TO SCALE"

- ① EXISTING 14" PCC PAVEMENT
- ② PROPOSED BITUMINOUS SURFACE COURSE (1.5" DEPTH)
- ③ PROPOSED POROUS FRICTION COURSE (0.10" DEPTH)
- ④ PROPOSED BITUMINOUS TACK COAT (0.25 GAL./S.Y.)
- ⑤ EXISTING CRUSHED AGGREGATE BASE COURSE
- ⑥ EXISTING BITUMINOUS BASE/SURFACE COURSE
- ⑦ PROPOSED BITUMINOUS PAVEMENT MILLING (0' TO 0.22')
- ⑧ PROPOSED BITUMINOUS PAVEMENT MILLING (0' TO 0.12')

P.C.C. PAVEMENT REMOVAL AND REPLACEMENT

THE AREA DESIGNATED AS [Hatched Area] ON THIS SHEET WILL HAVE THE EXISTING P.C.C. PAVEMENT ADJUSTED TO MATCH THE PROPOSED PAVEMENT. ALL REMOVED MATERIAL WILL BE DISPOSED OF OFF THE AIRPORT SITE.

THE EXISTING P.C.C. PAVEMENT WILL BE REMOVED TO THE JOINT THAT IS NEAREST TO THE DIMENSIONS SHOWN ON THIS SHEET.


THE REMOVAL OF THE P.C.C. PAVEMENT WILL BE CONSIDERED AS AN INCIDENTAL ITEM AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

THIS ITEM OF WORK SHALL BE PAID FOR UNDER ITEM:
 AR501911 "REMOVE & REPLACE P.C.C. PAVEMENT" - PER S.F.

QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	QUANTITY	AS BUILT QUANTITY
AR401610	BITUMINOUS SURFACE COURSE	TON	1,364	
AR402622	POROUS FRICTION COURSE, 0.10'	S.Y.	14,784	
AR401610	BITUMINOUS SURFACE COURSE (LEVELING WEDGE)	TON	100	

LEGEND

- [Dotted Pattern] EXISTING PAVEMENT
- [Hatched Pattern] PROPOSED IMPROVEMENTS
- [Diagonal Lines] PROPOSED PFC LIMITS
- [Horizontal Lines] PROPOSED PCC PAVEMENT
- [Cross-hatched Pattern] PROPOSED REMOVE & REPLACE PCC PAVEMENT

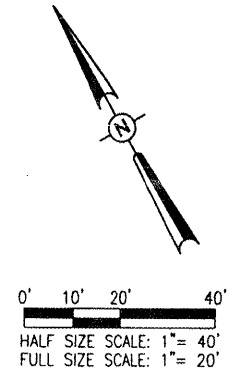

CO056

DATE	REVISION	BY
4/02/09	REVISED AS PER IDA REVIEW CAH	

COLES COUNTY AIRPORT
 AUTHORITY
 COLES COUNTY MEMORIAL AIRPORT
 I.L. PROJ.: MTO-3856 A.I.P. PROJ.: 3-17-0066-B23

Hanson Project No. 0840198D.0800	03/13/09
File Name R-121CON.DWG	KDM
Scale 1" = 20'	KDM
Date 03/13/09	CAH
LAYOUT	03/13/09
DRAWN	03/13/09
REVIEWED	03/13/09

HANSON
 Hanson Professional Services Inc.
 575 S. Main Street
 Springfield, Illinois 62703-2886
 Offices Nationwide

REHABILITATE CENTER APRON
 PROPOSED CONSTRUCTION PLAN
 STA. 28+62.8 TO STA. 31+00