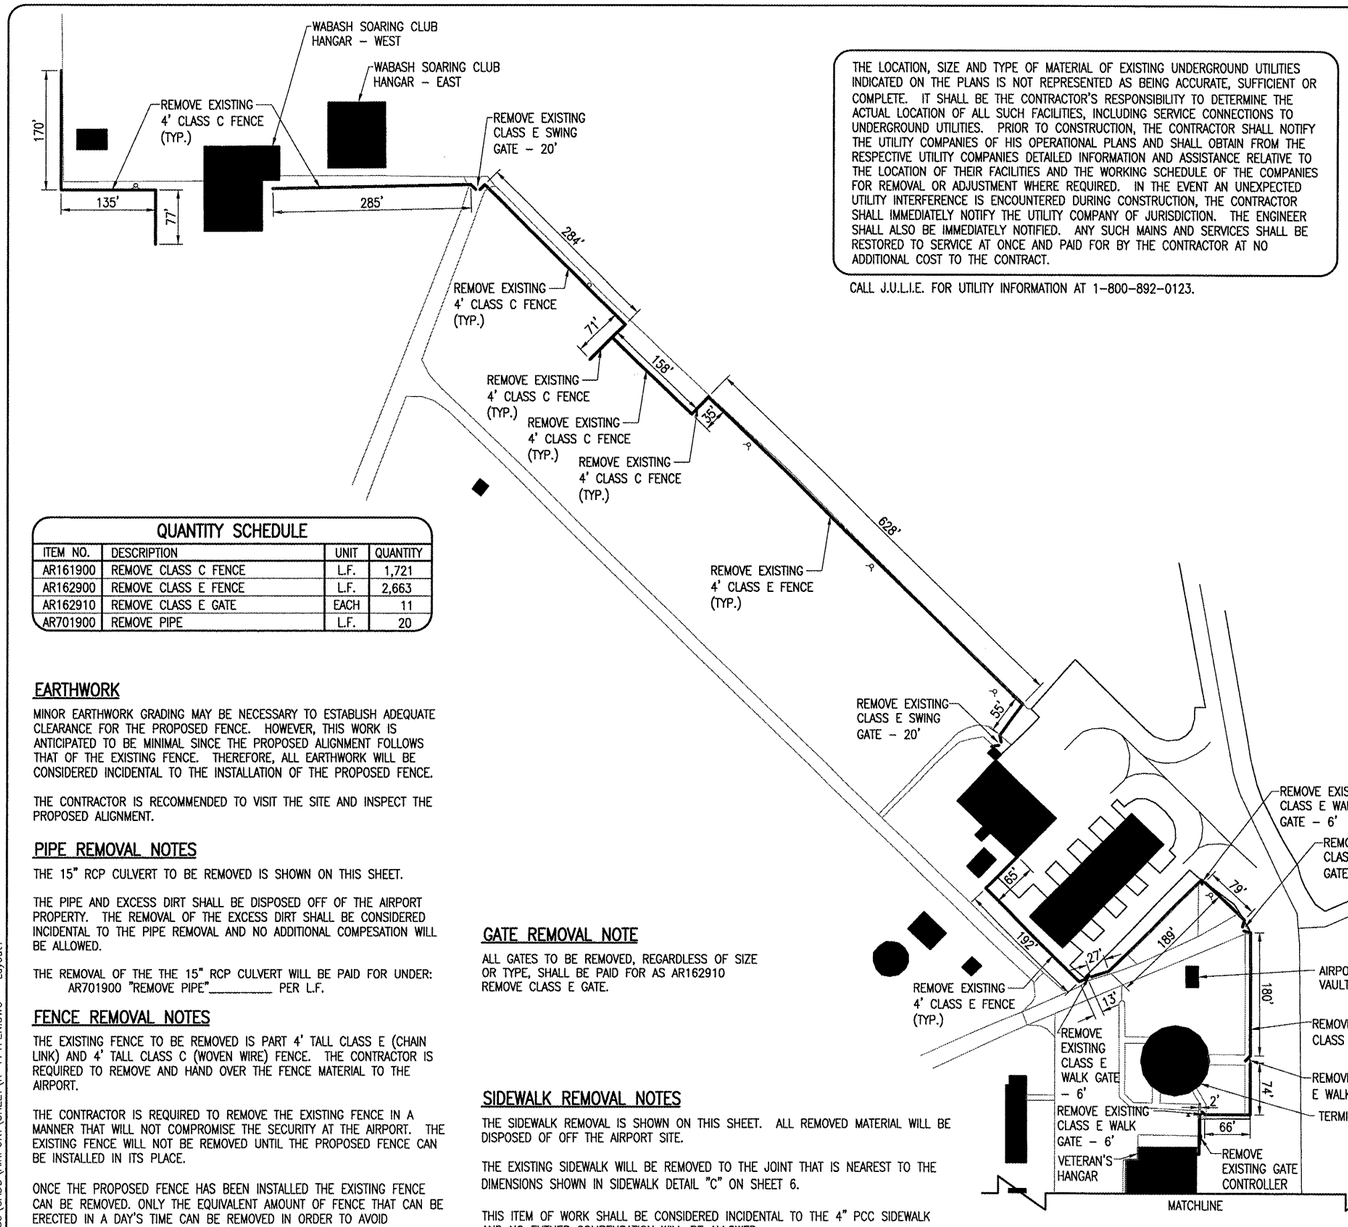

THE LOCATION, SIZE AND TYPE OF MATERIAL OF EXISTING UNDERGROUND UTILITIES INDICATED ON THE PLANS IS NOT REPRESENTED AS BEING ACCURATE, SUFFICIENT OR COMPLETE. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE ACTUAL LOCATION OF ALL SUCH FACILITIES, INCLUDING SERVICE CONNECTIONS TO UNDERGROUND UTILITIES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL NOTIFY THE UTILITY COMPANIES OF HIS OPERATIONAL PLANS AND SHALL OBTAIN FROM THE RESPECTIVE UTILITY COMPANIES DETAILED INFORMATION AND ASSISTANCE RELATIVE TO THE LOCATION OF THEIR FACILITIES AND THE WORKING SCHEDULE OF THE COMPANIES FOR REMOVAL OR ADJUSTMENT WHERE REQUIRED. IN THE EVENT AN UNEXPECTED UTILITY INTERFERENCE IS ENCOUNTERED DURING CONSTRUCTION, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE UTILITY COMPANY OF JURISDICTION. THE ENGINEER SHALL ALSO BE IMMEDIATELY NOTIFIED. ANY SUCH MAINS AND SERVICES SHALL BE RESTORED TO SERVICE AT ONCE AND PAID FOR BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE CONTRACT.

CALL J.U.L.I.E. FOR UTILITY INFORMATION AT 1-800-892-0123.

QUANTITY SCHEDULE

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
AR161900	REMOVE CLASS C FENCE	L.F.	1,721
AR162900	REMOVE CLASS E FENCE	L.F.	2,663
AR162910	REMOVE CLASS E GATE	EACH	11
AR701900	REMOVE PIPE	L.F.	20

EARTHWORK

MINOR EARTHWORK GRADING MAY BE NECESSARY TO ESTABLISH ADEQUATE CLEARANCE FOR THE PROPOSED FENCE. HOWEVER, THIS WORK IS ANTICIPATED TO BE MINIMAL SINCE THE PROPOSED ALIGNMENT FOLLOWS THAT OF THE EXISTING FENCE. THEREFORE, ALL EARTHWORK WILL BE CONSIDERED INCIDENTAL TO THE INSTALLATION OF THE PROPOSED FENCE.

THE CONTRACTOR IS RECOMMENDED TO VISIT THE SITE AND INSPECT THE PROPOSED ALIGNMENT.

PIPE REMOVAL NOTES

THE 15" RCP CULVERT TO BE REMOVED IS SHOWN ON THIS SHEET.

THE PIPE AND EXCESS DIRT SHALL BE DISPOSED OFF OF THE AIRPORT PROPERTY. THE REMOVAL OF THE EXCESS DIRT SHALL BE CONSIDERED INCIDENTAL TO THE PIPE REMOVAL AND NO ADDITIONAL COMPESATION WILL BE ALLOWED.

THE REMOVAL OF THE THE 15" RCP CULVERT WILL BE PAID FOR UNDER:
AR701900 "REMOVE PIPE"_____ PER L.F.

FENCE REMOVAL NOTES

THE EXISTING FENCE TO BE REMOVED IS PART 4' TALL CLASS E (CHAIN LINK) AND 4' TALL CLASS C (WOVEN WIRE) FENCE. THE CONTRACTOR IS REQUIRED TO REMOVE AND HAND OVER THE FENCE MATERIAL TO THE AIRPORT.

THE CONTRACTOR IS REQUIRED TO REMOVE THE EXISTING FENCE IN A MANNER THAT WILL NOT COMPROMISE THE SECURITY AT THE AIRPORT. THE EXISTING FENCE WILL NOT BE REMOVED UNTIL THE PROPOSED FENCE CAN BE INSTALLED IN ITS PLACE.

ONCE THE PROPOSED FENCE HAS BEEN INSTALLED THE EXISTING FENCE CAN BE REMOVED. ONLY THE EQUIVALENT AMOUNT OF FENCE THAT CAN BE ERECTED IN A DAY'S TIME CAN BE REMOVED IN ORDER TO AVOID UNACCEPTABLE GAPS. THE CONTRACTOR IS CAUTIONED TO BE COGNIZANT OF INCLEMENT WEATHER, EQUIPMENT TROUBLE, OR OTHER UNEXPECTED EVENTS THAT WOULD INTERFERE WITH THE COMPLETION OF A DAYS WORK. A GAP IN THE FENCE WILL NOT BE PERMITTED TO REMAIN OVERNIGHT.

ALL EXISTING FENCE MATERIAL TO INCLUDE FENCE POST, WIRE, HARDWARE, AND ALL ASSOCIATED MATERIAL SHALL BE REMOVED AND DELIVERED TO THE AIRPORT AT A LOCATION IN THE AIRPORT PROPERTY TO BE DETERMINED BY THE AIRPORT MANAGER. BROKEN CONCRETE, EXCESS DIRT, PIPE REMOVED, ETC. SHALL BE DISPOSED OFF OF AIRPORT PROPERTY. DISPOSAL OF THE EXISTING FENCE MATERIAL SHALL BE INCLUDED IN THE COST OF AR161900 AND AR162900.

GATE REMOVAL NOTE

ALL GATES TO BE REMOVED, REGARDLESS OF SIZE OR TYPE, SHALL BE PAID FOR AS AR162910 REMOVE CLASS E GATE.

SIDEWALK REMOVAL NOTES

THE SIDEWALK REMOVAL IS SHOWN ON THIS SHEET. ALL REMOVED MATERIAL WILL BE DISPOSED OF OFF THE AIRPORT SITE.

THE EXISTING SIDEWALK WILL BE REMOVED TO THE JOINT THAT IS NEAREST TO THE DIMENSIONS SHOWN IN SIDEWALK DETAIL "C" ON SHEET 6.

THIS ITEM OF WORK SHALL BE CONSIDERED INCIDENTAL TO THE 4" PCC SIDEWALK AND NO FUTHER COMPENSATION WILL BE ALLOWED.

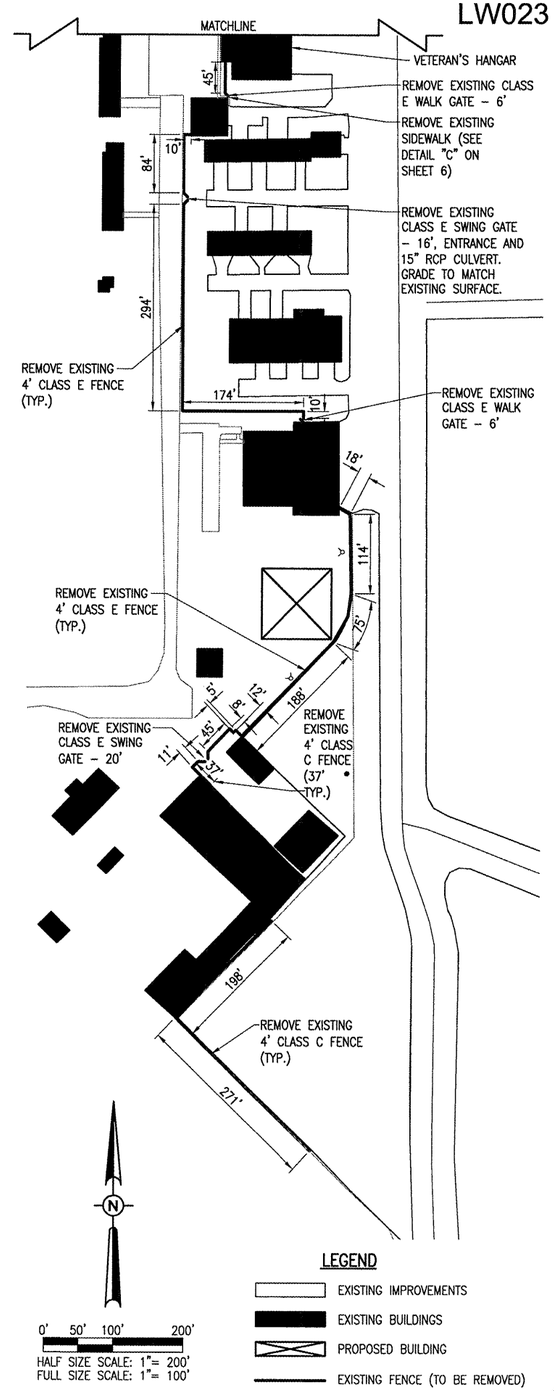

DATE	REVISION	BY

MID-AMERICAN AIR CENTER
LAWRENCEVILLE-VINCENNES AIRPORT
LAWRENCEVILLE, ILLINOIS

IL. PROJ.: LWV-3869 A.I.P. PROJ.: 3-17-0061-B15

Hanson Project No. 08A01850 0800
Filename R-171FEN.DWG
Scale 1"= 100'
Date 01/20/09

LAYOUT	JSL	12/15/08
DRAWN	BAK	12/15/08
REVIEWED	JSL	01/20/09

HANSON
Hanson Professional Services Inc.
1525 South Sixth Street
Springfield, Illinois 62703-2886
Offices Nationwide

FRONTAL AREA FENCE INSTALLATION

EXISTING FENCE REMOVAL PLAN

4
4 of 15 sheets

MAR 25, 2009 1:03 PM VOORHO805
I:\AIRPORTS\LAWRENCE\08A0185\CADD\AIRPORT\SHEET\R-171FEN.DWG - Layout1