DEPARTMENT OF TRANSPORTATION


PROPOSED HIGHWAY PLANS

FAP ROUTE 694 (US 52)
SECTION D2 BDR 2019-4
PROJECT
EXPANSION JOINT REPLACEMENT, DECK
PATCHING & CONCRETE OVERLAY
LEE COUNTY

C-92-005-19

AMBOY TOWNSHIP - SECTION 22 & 23

FOR INDEX OF SHEETS, SEE SHEET NO. 2 FOR STATE STANDARDS, SEE SHEET NO. 2




FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811


PROJECT ENGINEER: MAHMOUD ETEMADI, Ext. 393
PROJECT MANAGER: MAHMOUD ETEMADI, Ext. 393

CONTRACT NO. 64N28

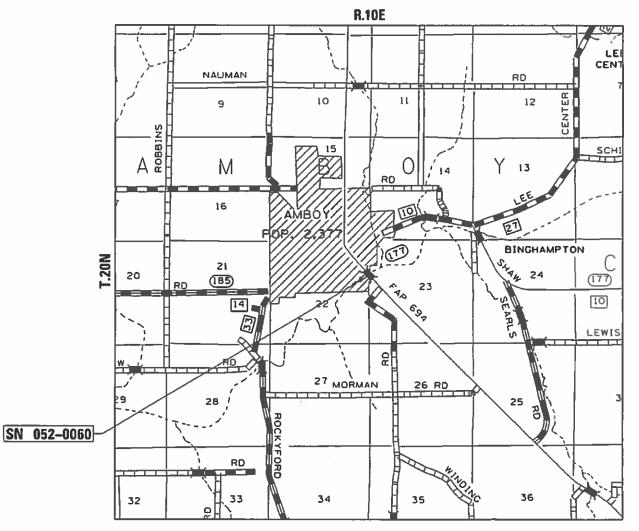

D-92-074-18





PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

INDEX OF SHEETS

- 1 COVER SHEET
- 2 INDEX OF SHEETS
- 2 DISTRICT AND STATE STANDARDS
- 3 GENERAL NOTES
- 4 6 SUMMARY OF QUANTITIES
- 7 TYPICAL SECTIONS
- 8 9 SCHEDULE OF QUANTITIES
- 9 13 STAGING PLANS
- 14 19 STRUCTURE PLANS BRIDGES (SN 052-0060)
- 20 23 WORK ZONE SIGN DETAILS 34.1
- 24 26 TYPICAL PAVEMENT MARKINGS (DS 41.1)

STATE STANDARDS

000001	_	07	STANDARD SYMBOLS, ABREVIATIONS, AND PATTERNS
001001	-	02	AREAS OF REINFORCEMENT BARS
001006	-		DECIMAL OF AN INCH AND OF A FOOT
701006	-	05	OFF-ROAD OPERATIONS, 2L, 2W,15' TO 24" FROM PAVEMENT EDGE
701011	-	04	OFF-ROAD MOVING OPERATIONS, 2L, 2W, DAY ONLY
701201	-	05	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45MPH
701301	-	04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701306	-	04	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS ≥ 45MPH
701311	-	03	LANE CLOSURE, 2L, 2W, MOVING OPERATIONS DAY ONLY
701321	-	17	LANE CLOSURE, 2L, 2W, BRIDGE REPAIR WITH BARRIER
701901	-	80	TRAFFIC CONTROL DEVICES
704001	-	80	TEMPORARY CONCRETE BARRIER
720011	-	01	METAL POSTS FOR SIGNS, MARKERS AND DELINEATORS
728001	-	01	TELESCOPING STEEL SIGN SUPPORT
729001	-	01	APPLICATIONS FOR TYPES A AND B METAL POSTS (FOR SIGNS & MARKERS)
780001	-	05	TYPICAL PAVEMENT MARKINGS
782006	-		GUARDRAIL AND BARRIER WALL REFLECTOR MOUNTING DETAILS

USER NAME = vaceksk	DESIGNED -	REVISED -				INDEX	OF SHEETS &		F.A.P.	SECTION	COUNTY	TOTAL	SHEET
	DRAWN - JDH	REVISED -	STATE OF ILLINOIS						694	D2 BDR 2019-4	LEE	26	2
PLOT SCALE = 4800.0000 ' / in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION			SIAI	E STANDARDS				CONTRAC	T NO. 6	54N28
PLOT DATE = Dec-21-2018 01:10:36 PM	DATE -	REVISED -	1	SCALE:	SHEET	OF	SHEETS STA.	TO STA.	_ _	LILLINOIS (FED. A	D PROIECT		

GENERAL NOTES

The final top 4 inches of soil in any right-of-way area disturbed by the Contractor must be capable of supporting vegetation. The soil must be from the A horizon (zero to 2' deep) of soil profiles of local soils. The cost of this work shall be included in the unit prices bid and no additional compensation will be allowed.

All "Aggregate Subgrade Improvement" (Section 303), shall be completed in accordance with Articles 311.04, 311.05, 311.05(a), 311.06 and 311.07. All aggregate subgrade thicknesses equal to or less than 12 inches shall be constructed of aggregate of CA02 gradation. All aggregate subgrade thicknesses greater than 12 inches shall be constructed of CS02.

This structure will retain the same number 052-0060

Pavement Marking shall be done according to Standard 780001, except as follows:

- 1. All words, such as ONLY, shall be 8 feet high.
- 2. All non-freeway arrows shall be the large size.
- 3. The distance between yellow no-passing lines shall be 8 inches, not 7 inches, as shown in the detail of Typical Lane and Edge Lines.
- 4. Centerline Skip Dash Pavement Marking on multi-lane divided, multi-lane undivided, and one-way roadway shall be according to District Standard 41.1.

Hazards behind Temporary Concrete Barrier Wall

No materials, equipment, vehicles or other hazards shall be within 3'-6" of the temporary concrete barrier wall measured from the closest point of the barrier wall perpendicular to the hazard. Equipment that is actively working with the 3'-6" of the barrier wall may be allowed for a short duration, if approved by the engineer, required for the work activity, if there is not another method to complete the work.

The following Mixture Requirements are applicable for this project:

Surface
PG 64-22
4.0 @N50
IL 9.5
С
112 lbs.
QC/QA
N/A
N/A

1) When a number of roller passes is specified, the Contractor may opt to use intelligent compaction in lieu of density testing under the Quality Control for Performance (QCP) program.

FILE NAME = 64N28.GN.DOCX	USER NAME =	DESIGNED - Engineering Systems	REVISED -						ROUTE	SECTION	COUNTY	TOTAL S SHEETS	EET 40.
		DRAWN -	REVISED -	STATE OF ILLINOIS		GENERAL N	OTES		FAP Route 694 (US 52)	D2 BDR 2019-4	Lee	26	3
	PLOT SCALE =	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION							CONTRACT NO	D. #64N28	
	PLOT DATE = 12/21/2018 2:01 PM	DATE - 12/3/2018 12:30 PM	REVISED -		SCALE:	SHEET NO. OF SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJI	ECT	

SUMMARY OF QUANTITIES

CONSTRUCTION CODE
S.N. 052-0060
100% STATE

				BR I DGE
CODE				0059
NO.	ITEM	UNIT	TOTAL	RURAL
20200500	EARTH EXCAVATION (WIDENING)	CU YD	100	100
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	144.4	144.4
40600000	TEMPORARY RAMP	SQ YD	58	58
40000990	TEMPORART RAMP	30 10		36
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	17	17
40800025	BITUMINOUS MATERIALS (PRIME COAT)	POUND	88	88
48301000	PROTECTIVE COAT	SQ YD	0	0
50102400	CONCRETE REMOVAL	CU YD	10.5	10.5
50300255	CONCRETE SUPERSTRUCTURE	CU YD	11.6	11.6
		SQ YD	633	633
	BRIDGE DECK GROOVING PROTECTIVE COAT	SQ YD	688	688
		30 10	088	088
50800205	REINFORCEMENT BARS, EPOXY COATED	POUND	1430	1430
50800515	BAR SPLICERS	EACH	28	28
52000110	PREFORMED JOINT STRIP SEAL	FOOT	67	67
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CA MO	3	3
67100100	MOBILIZATION	L SUM	1	1
70100405	TRAFFIC CONTROL AND PROTECTION, STANDARD 701321	EACH	1	1

* SPECIALTY ITEM

USER NAME = vaceksk	DESIGNED -	REVISED -
	DRAWN - JDH	REVISED -
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = Dec-21-2018 01:31:22 PM	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCALE:

	A				F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	SUMMARY	OF QU	ANTITIES	5	694	D2 BDR 2019-4	LEE	26	4
							CONTRACT	NO. 64	4N28
SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS FED. A	ID PROJECT		

SUMMARY OF QUANTITIES

CONSTRUCTION CODE
S.N. 052-0060
100% STATE

				BRIDGE
CODE				0059
NO.	ITEM	UNIT	TOTAL	RURAL
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	1
70100500	TRAFFIC CONTROL AND PROTECTION, STANDARD 701326	L SUM	1	1
70106500	TEMPORARY BRIDGE TRAFFIC SIGNALS	EACH	2	2
70106700	TEMPORARY RUMBLE STRIPS	EACH	3	3
70107005	PAVEMENT MARKING BLACKOUT TAPE, 5"	FOOT	860	860
70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	1318	1318
70300904	PAVEMENT MARKING TAPE, TYPE IV 4"	FOOT	2078	2078
70300924	PAVEMENT MARKING TAPE, TYPE IV 24"	FOOT	26	26
70400100	TEMPORARY CONCRETE BARRIER	FOOT	425	425
70400200	RELOCATE TEMPORARY CONCRETE BARRIER	FOOT	438	438
70600242	IMPACT ATTENUATORS, TEMPORARY (NON- REDIRECTIVE, NARROW), TEST LEVEL 2	EACH	2	2
70600341	IMPACT ATTENUATORS, RELOCATE (NON- REDIRECTIVE, NARROW), TEST LEVEL 2	EACH	2	2
78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	4820	4820

* SPECIALTY ITEM

USER NAME = vaceksk	DESIGNED -	REVISED -
	DRAWN - JDH	REVISED -
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = Dec-21-2018 01:32:05 PM	DATE -	REVISED -

STATE OF ILLINOIS	
DEPARTMENT OF TRANSPORTATION	

					F.A.P. RTE.	SEC	TION		COUNTY	TOTAL SHEET	
	SUMMARY	r of au	ANTITIES	i	694	D2 BDR	2019-4		LEE	26	1
					ļ				CONTRACT	NO.	54
SHEET	OF	SHEETS	STA.	TO STA.			ILLINOIS	FED. A	ID PROJECT		Т

SUMMARY OF QUANTITIES

CONSTR	UCTION CODE
S.N.	052-0060
100	% STATE


					100% STATE
					BR I DGE
	CODE				0059
	NO.	ITEM	UNIT		RURAL
*	Z0012130	BRIDGE DECK SCARIFICATION 3/4"	SQ YD	661.5	661.5
	Z0016001	DECK SLAB REPAIR (FULL DEPTH, TYPE I)	SQ YD	35	35
*	Z0006012	BRIDGE DECK LATEX CONCRETE OVERLAY, 2 1/4 INCHES	SQ YD	661.5	661.5
	Z0016002	DECK SLAB REPAIR (FULL DEPTH, TYPE II)	SQ YD	5	5
*	Z0062456	TEMPORARY PAVEMENT	SQ YD	286	286

* SPECIALTY ITEM

USER NAME = vaceksk	DESIGNED -	REVISED -	
	DRAWN - JDH	REVISED -	
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -	
PLOT DATE = Dec-21-2018 01:33:02 PM	DATE -	REVISED -	

STATE OF ILLINOIS	
DEPARTMENT OF TRANSPORTATION	

						F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		SUMMARY	OF QU	ANTITIES		694	D2 BDR 2019-4	LEE	26	6
								CONTRACT	NO. 64	4N28
SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS FED. A	ID PROJECT		




PRE-STAGE SHOULDER WIDENING

STA 997+70 - 999+13 NB
STA 1001+03 - 1002+45 NB
STA 997+70 - 999+11 SB
STA 1001+01 - 1002+45 SB


* AGGREGATE SUBGRADE IMPROVEMENT, 12"

4" TEMPORARY PAVEMENT

STAGE I (SN 052-0060 OVER GREEN RIVER)

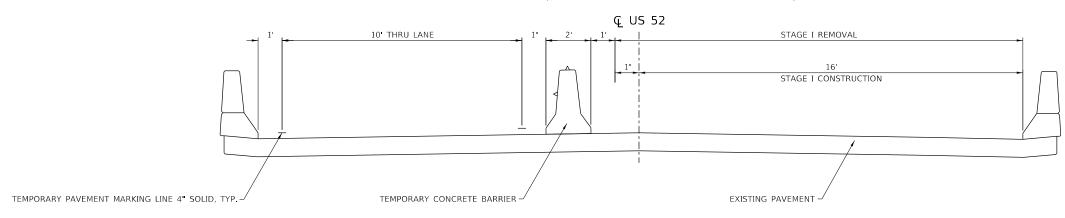

STAGE II (SN 052-0060 OVER GREEN RIVER)

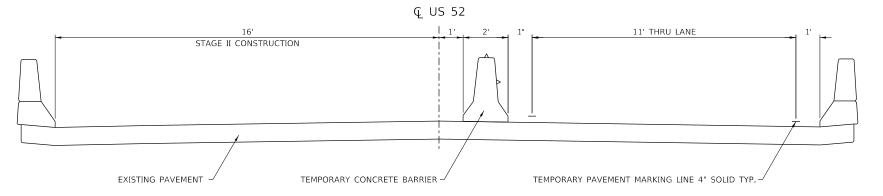

NOTE:

* INCLUDED IN THE COST OF TEMPORARY PAVEMENT

USER NAME = vaceksk	DESIGNED -	REVISED -								F.A.P. RTE	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
	DRAWN - JDH	REVISED -	STATE OF ILLINOIS			STAGIN	NG TYPIC	ALS		694	D2 BDR 2019-4	LEE	26 7
PLOT SCALE = 4.0000 ' / in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION									CONTRAC	T NO. 64N28
PLOT DATE = Dec-21-2018 01:37:47 PM	DATE -	REVISED -		SCALE: 1"=40'	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS FED. A	ID PROJECT	

20200500		EARTH	EXCAVATION (WIDENING)	ı		70106500		TEMPORAF	RY BRIDGE TRAFFIC			
	CU YD	TOTAL	LOCATION		<u>COMMENTS</u>		_EACH_	TOTAL	LOCATION		COMMENTS	
	24.4	25.0	997 + 70.00 -	999 + 11.	00 RT SIDE		3	3			To Be determ	nined by RE
	24.7	25.0	997 + 70.00 -	999 + 13.	00 LT SIDE		3	3	TOTAL		Coming into	-
	24.9	25.0	1001 + 1.00 -	1002 + 45.	00 RT SIDE	-		3	GRAND TOTAL		3	•
	24.5	25.0	1001 + 3.00 -	1002 + 45.	00 LT SIDE							
_	98.5	100.0	TOTAL			70107005		<u>PAVEMEN</u>	Γ MARKING BLACKOUT	TAPE, 5"		
		100	GRAND TOTAL									
							<u>FOOT</u>	<u>TOTAL</u>	LOCATION		<u>COMMENTS</u>	
40600982		HOT - MIX	X ASPHALT SURFACE REN	<u> 10val - Butt</u>	JOINT		70	70	995 + 75.00 -	998 +	25.00 Stage 1 I.S.	LANE
							70	70	1002 + 00 -	1004 +	50.00 Stage 2 I.S.	LANE
	SQ YD	<u>TOTAL</u>	LOCATION		COMMENTS		455	455	997 + 80.00 -	1002 +	35.00 Stage 1 O.S.	LANE
	72.2	72.2	998 + 72.00 -	999 + 12.	00 MAINLINE		132	132	997 + 80.00 -	999 +	12.00 Stage 2 O.S.	LANE
_	72.2	72.2	1001 + 2.00 -	1001 + 42.	00 MAINLINE		133	133	1001 + 2.00 -	1002 +	35.00 Stage 2 O.S.	LANE
	144.4	144.4	TOTAL			_	860	860	TOTAL			
		144.4	GRAND TOTAL					860	GRAND TOTAL			
40600990		<u>TEMPOR</u>	ARY RAMP			70300150		SHORT TE	ERM PAVEMENT MARKIN	IG REMOVA	L	
	SQ YD	TOTAL	LOCATION				SQ FT	<u>TOTAL</u>	LOCATION		COMMENTS	
	28.9	29.0		999 + 13	2 MAINLINE		298	298		1004 +	87.00 Stage 1 I.S.	LANE
	28.9	29.0	1001 + 2 -	1001 + 13	2 MAINLINE		152.3	153			35.00 Stage 1 O.S.	
_	57.8	58.0	- TOTAL				253	253			15.00 Stage 2 I.S.	
	37.10	58	GRAND TOTAL				152.3	153			35.00 Stage 2 O.S.	
		30					26.0	26	995 + 94.61 -		STOP BARS	
40603310		HOT - MI	X ASPHALT SURFACE COL	JRSE, MIX "C	<u>C", N50</u>		26.0	26	1004 + 87.00 -		STOP BARS	
							83.3	84		998 +	25.00 Stage 1 I.S.	LANE
	TONS	TOTAL	LOCATION		<u>COMMENTS</u>		83.3	84			50.00 Stage 2 I.S.	
	8.0	8.0	998 + 79.00 -	999 + 12.	00 MAINLINE		151.7	152			35.00 Stage 1 O.S.	
	8.3	9.0	1001 + 2.00 -	1001 + 36.	00 MAINLINE		44.0	44			12.00 Stage 2 O.S.	
_	16.3	17.0	_ TOTAL				44.3	45			35.00 Stage 2 O.S.	
		17	GRAND TOTAL			_	1314.2	1318	TOTAL		J	
								1318	GRAND TOTAL			
40800025		<u>B I TUM I I</u>	NOUS MATERIALS (PRIME	COAT)								
						70300904		PAVEMEN	Γ MARKING TAPE, TYP	E IV	<u>4"</u>	
	<u>ILS</u>	<u>TOTAL</u>	LOCATION		COMMENTS							
	42.9	43.0	998 + 79.00 -	999 + 12.	00 MAINLINE		<u>FOOT</u>	<u>TOTAL</u>	LOCATION		<u>COMMENTS</u>	
_	44.2	45.0	_ 1001 + 2.00 -	1001 + 36.	00 MAINLINE		894	894	995 + 94.61 -	1004 +	87.00 Stage 1 I.S.	LANE
	87.1	88.0	TOTAL				457	457	997 + 80.00 -	1002 +	35.00 Stage 1 O.S.	LANE
		88	GRAND TOTAL				270	270	996 + 56.00 -	1004 +	15.00 Stage 2 I.S.	LANE
			ADV DD 1000				457	457	997 + 80.00 -	1002 +	35.00 Stage 2 O.S.	LANE
70106500		<u>I EMPOR</u>	ARY BRIDGE TRAFFIC				2078	2078	TOTAL			
								2078	GRAND TOTAL			
	<u>EACH</u>	TOTAL	LOCATION		COMMENTS							
	1	1	996 + 35.00		RT SIDE							
_	1	1	1004 + 37.00		LT SIDE							
	2	2	TOTAL									
		2	GRAND TOTAL									
USER	NAME = vaceksk		DESIGNED - REVISED								F.A.P. SECTION	COUNTY TOTAL SH
			DRAWN - JDH REVISED	-		STATE OF ILLINOIS			SCHEDULE OF QUANTITIES		694 D2 BDR 2019-4	LEE 26

MODEL: DeraUIT FILE NAME: DW:WILD8

PLOT SCALE = 100.0000 ' / in.

PLOT DATE = Dec-21-2018 01:39:28 PM

CHECKED -

DATE

REVISED -

REVISED

SCALE:

70300924		PAVEMEN	<u>IT MARKING TAPE, TYF</u>	<u> </u>	Z00624
	_ <u>FOOT_</u>	<u>TOTAL</u>	LOCATION	COMMENTS	
	13	13	995 + 94.61	RT SIDE	
	13	13	1004 + 87.00	LT SIDE	
_	26	26	TOTAL		
		26	GRAND TOTAL		
70400100		<u>TEMPORA</u>	RY CONCRETE BARRIER	3	
	<u>FOOT</u>	TOTAL	LOCATION	COMMENTS	
_	425	425	997 + 91.00 -	1002 + 11.00 Stage 1	
	425	425	TOTAL		
		425	GRAND TOTAL		
70400200		RELOCAT	E TEMPORARY CONCRET	TE BARRIER	
	FOOT	TOTAL	LOCATION	COMMENTS	
	438	438	997 + 91.50 -	1002 + 23.50 Stage 2	
_	438	438	TOTAL		
		438	GRAND TOTAL		
70600242		<u>IMPACT</u>	ATTENUATORS, TEMPOR	RARY	
	EACH	TOTAL	LOCATION	COMMENTS	
	1	1	997 + 91.00	RT SIDE	
	1	1	1002 + 11.50	LT SIDE	
_	2	2	TOTAL		
		2	GRAND TOTAL		
70600341		<u>IMPACT</u>	ATTENUATORS, RELOCA	ATE (NON- REDIRECTIVE, NARROW), TEST LEVEL 2	2
	<u>EACH</u>	<u>TOTAL</u>	LOCATION	COMMENTS	
	1	1	997 + 91.00	RT SIDE	
	1	1	1002 + 11.50	LT SIDE	
_	2	2	TOTAL		
		2	GRAND TOTAL		
78001110		PAINT P	AVEMENT MARKING - L	_ INE	
	FOOT	TOTAL	LOCATION	<u>COMMENTS</u>	
	1,070	1,070	994 + 70.00 -	1005 + 40.00 RT SIDE	
	270	270	994 + 70.00 -	1005 + 40.00 CENTER LINE	
	1,070	1,070	994 + 70.00 -	1005 + 40.00 LT SIDE	
	2410	2410	TOTAL		
_	2410				

REVISED -

REVISED -

REVISED -

REVISED -

USER NAME = vaceksk

PLOT DATE = Dec-21-2018 01:42:39 PM

DESIGNED -

CHECKED -

DATE

DRAWN - JDH

OTATE OF ULINOIS							F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
STATE OF ILLINOIS		S	CHEDULE	OF QU	ANTITIES		694	D2 BDR 2019-4	LEE	26	9
DEPARTMENT OF TRANSPORTATION									CONTRACT	NO. 64	1N28
	SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS FED. A	ID PROJECT		

TEMPORARY PAVEMENT

286.0 TOTAL

LOCATION

GRAND TOTAL

<u>COMMENTS</u>

997 + 70.00 - 999 + 11.00 RT SIDE

997 + 70.00 - 999 + 13.00 LT SIDE

1001 + 1.00 - 1002 + 45.00 RT SIDE

1001 + 3.00 - 1002 + 45.00 LT SIDE

<u>TOTAL</u>

71.0

72.0

72.0

71.0

286

SQ YD

70.5

71.5


72.0

71.0

285.0

TRAFFIC CONTROL PLAN FOR SN 052-0060 STAGE I



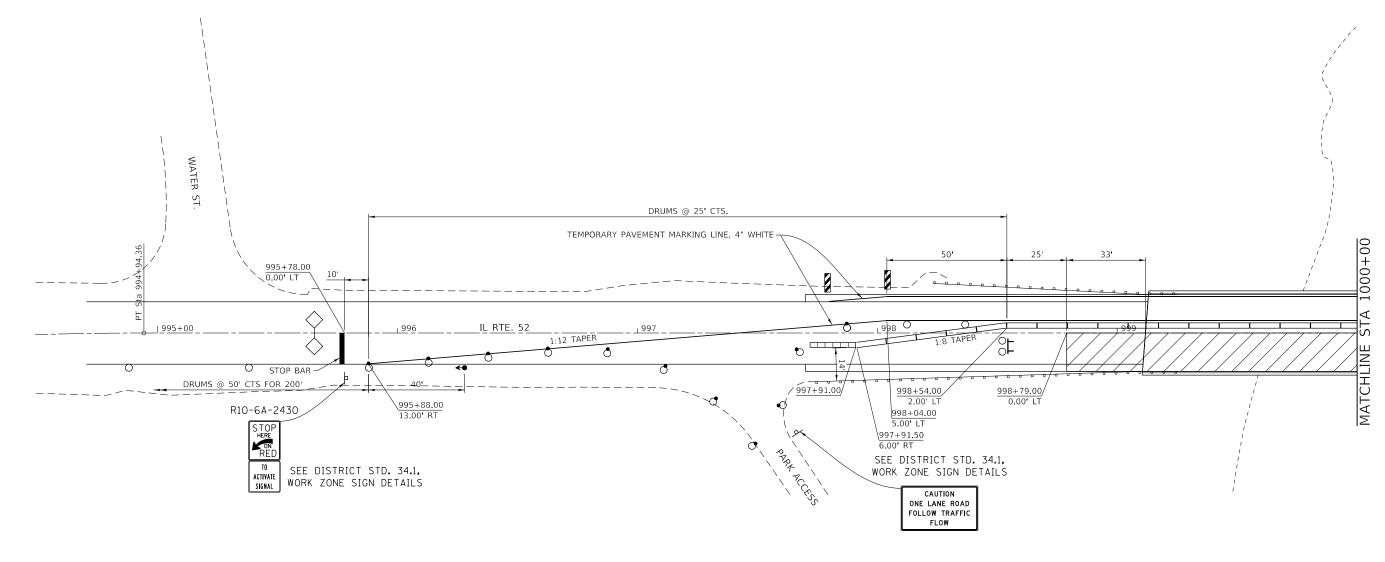

SYMBOLS

Work area

Drum with steady burning bi-directional light

Sign

Temporary concrete barrier

Type III barricade

Traffic signal

Double vertical panel (see detail on Std. 701316)

Crystal, bidirectional barrier wall/guardrail marker

Impact attenuator Absorb 350 - TL 2

GENERAL NOTES

See Traffic Control and Protection Standard 701321 for details not shown.

Traffic signals shall be operational only when all traffic controls are in place. When traffic signals are not in operation, flaggers shall be used and traffic control shall conform to Standard 701201 or 701206.

Temporary concrete barrier shall be according to Standard 704001.

Existing or temporary pavement markings shall be on both sides of open lane from stop bar to stop bar.

All dimensions are in inches (millimeters) unless otherwise shown.

USER NAME = vaceksk	DESIGNED	REVISED
	DRAWN - <u>JDH</u>	REVISED
PLOT SCALE = 40.0000 ' / in.	CHECKED	REVISED
PLOT DATE = Dec-21-2018 01:44:24 PM	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


TRAFFIC CONTROL PLAN FOR SN 052-0060

STAGE I


SCALE: 1"=40' SHEET OF SHEETS STA. TO STA.

TRAFFIC CONTROL PLAN FOR SN 052-0060 STAGE I



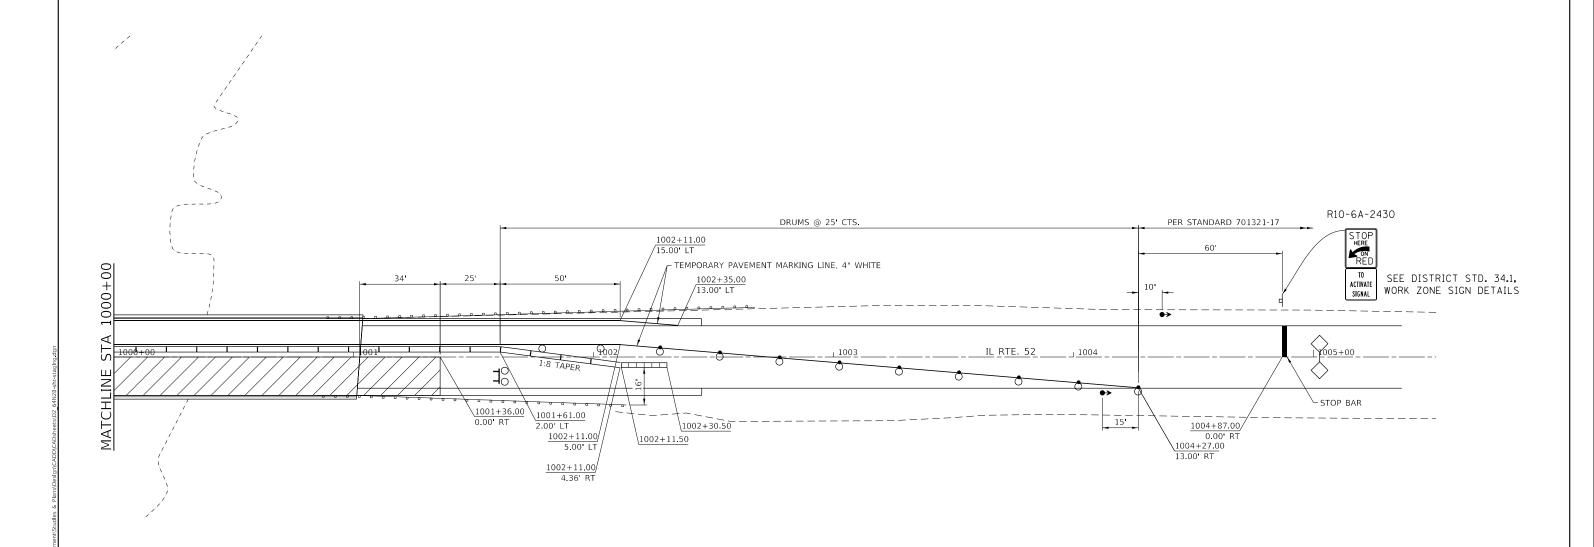

SYMBOLS

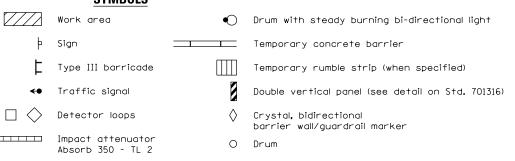

GENERAL NOTES

See Traffic Control and Protection Standard 701321 for details not shown.

Traffic signals shall be operational only when all traffic controls are in place. When traffic signals are not in operation, flaggers shall be used and traffic control shall conform to Standard 701201 or 701206.

Temporary concrete barrier shall be according to Standard 704001.


Existing or temporary pavement markings shall be on both sides of open lane from stop bar to stop bar.

All dimensions are in inches (millimeters) unless otherwise shown.


USER NAME = vaceksk	DESIGNED	REVISED		TRAFFIC CONTROL PLAN FOR SN 052-0060	F.A. <u>P.</u> RTE	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
	DRAWN - <u>JDH</u>	REVISED	STATE OF ILLINOIS		694	D2 BDR 2019-4	LEE	_2611_
PLOT SCALE = 40.0000 / in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION	STAGE I			CONTRAC	NO 64N29
PLOT DATE = Dec-21-2018 01:45:13 PM	DATE	REVISED		SCALE: 1"=40" SHEET OF SHEETS STA. TO STA.		ILLINOIS FED. A	ID PROJECT	

TRAFFIC CONTROL PLAN FOR SN 052-0060 STAGE II



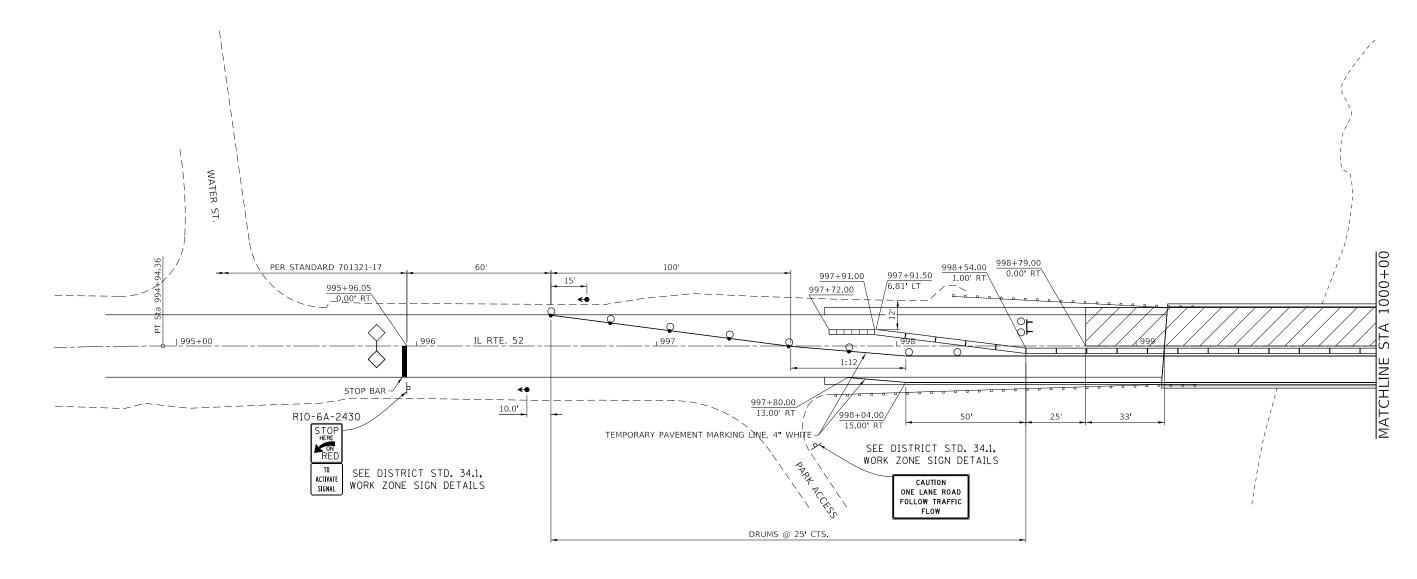

SYMBOLS

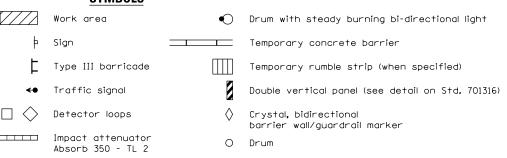

GENERAL NOTES

See Traffic Control and Protection Standard 701321 for details not shown.

Traffic signals shall be operational only when all traffic controls are in place. When traffic signals are not in operation, flaggers shall be used and traffic control shall conform to Standard 701201 or 701206.

Temporary concrete barrier shall be according to Standard 704001.


Existing or temporary pavement markings shall be on both sides of open lane from stop bar to stop bar.

All dimensions are in inches (millimeters) unless otherwise shown.


USER N	NAME = vaceksk	DESIGNED -	REVISED			TRAFFIC CONTROL PLAN FOR SN 052-0060	RTE SECTION	COUNTY SHEETS NO.
		DRAWN - <u>JDH</u>	REVISED	STATE OF ILLINOIS		STAGE II	694 D2 BDR 2019-4	LEE _2612_
PLOT S	SCALE = 40.0000 ' / in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION		JIAUL II		CONTRACT NO. 64N28
PLOT D	DATE = Dec-21-2018 01:45:51 PM	DATE	REVISED		SCALE: 1"=40'	SHEET OF SHEETS STA TO STA	ILLINOIS FED.	AID PROJECT

TRAFFIC CONTROL PLAN FOR SN 052-0060 STAGE II



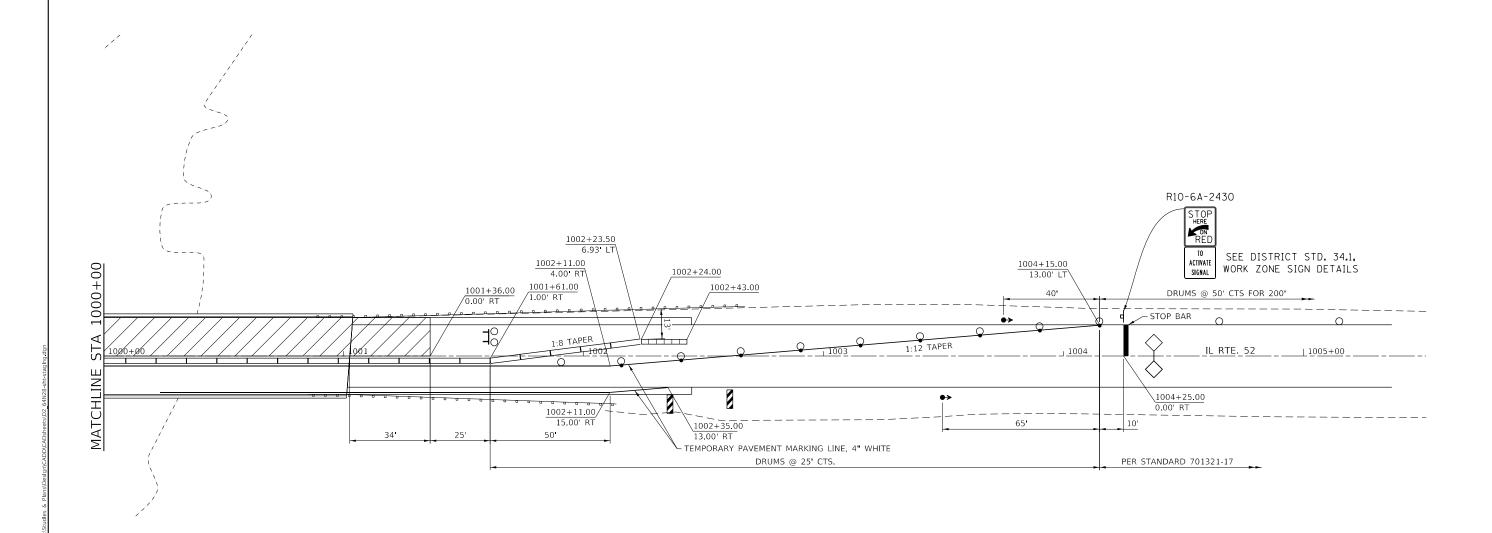

SYMBOLS

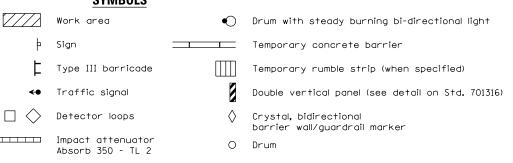

GENERAL NOTES

See Traffic Control and Protection Standard 701321 for details not shown.

Traffic signals shall be operational only when all traffic controls are in place. When traffic signals are not in operation, flaggers shall be used and traffic control shall conform to Standard 701201 or 701206.

Temporary concrete barrier shall be according to Standard 704001.

Existing or temporary pavement markings shall be on both sides of open lane from stop bar to stop bar.

All dimensions are in inches (millimeters) unless otherwise shown.


USER NAME = vaceksk	DESIGNED	REVISED
	DRAWN - <u>JDH</u>	REVISED
PLOT SCALE = 40.0000 ' / in.	CHECKED	REVISED
PLOT DATE = Dec-21-2018 01:46:27 PM	DATE	REVISED

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

 TRAFFIC CONTROL PLAN FOR SN 052-0060
 F.A.P. RTE.
 SECTION

 STAGE II
 694
 D2_BDR 2019

 SHEET
 OF SHEETS STA.
 TO STA.
 ILLING

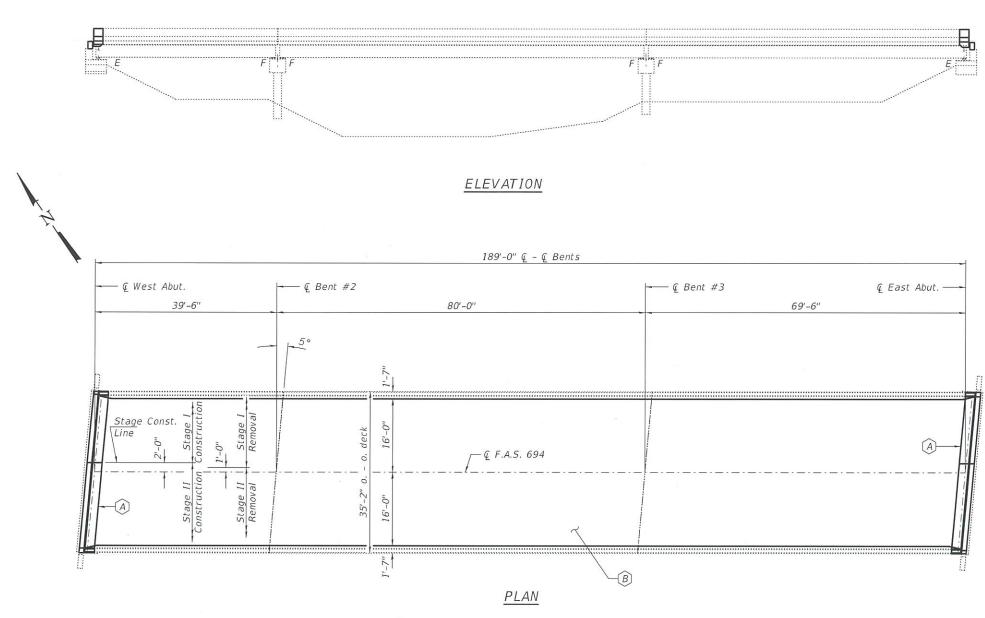

- A Remove and Replace Expansion Joints at Abutments.
- (B) Install a new $2\frac{1}{4}$ " Latex Overlay on the existing deck. (See sheet 2 & 3 of 6 for details.)

PUZEY 081-005470 SPRINGFIELD ** ILLINOIS

EXPIRES 11-30-2020

DESIGNED - CHECKED - STATE - CHECKED - CHECKED

PASSED

DATE - JANUARY 29, 2019

REVISED - REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GENERAL PLAN AND ELEVATION FAP 694 OVER GREEN RIVER SN 052-0060 SHEET NO. 1 OF 6 SHEETS

GENERAL NOTES

Reinforcement bars designated (E) shall be epoxy coated.

Prior to pouring the new concrete deck, all heavy or loose rust, loose mill scale, and other loose or potentially detrimental foreign material shall be removed from the surfaces in contact with concrete. Tightly adhered paint may remain unless otherwise noted. Removal shall be accomplished by methods that will not damage the steel and the cost will be included in the pay item covering removal of the existing concrete.

Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.

Existing reinforcement bars extending into the removal area shall be cleaned, straightened and incorporated into the new construction. Any reinforcement bars that are damaged during concrete removal shall be replaced with an approved bar splicer or anchorage system. Cost included with Concrete Removal.

Joint openings shall be adjusted according to Article 520.04 of the Std. Specs. when the deck is poured at an ambient temperature other than 50° F.


Cost of removal and re-installation of all members necessary to complete the work as detailed on the plans and as specified in the Special Provisions shall be included with Concrete Removal.

Synthetic fibers shall be added to the Bridge Deck Latex Concrete Overlay. See Special Provisions.

Areas of deck repairs are estimated. The Engineer shall show actual locations of deck repairs on as-built plans.

TOTAL BILL OF MATERIAL

ITEM	UNIT	QUANTITY
Concrete Removal	Cu. Yd.	10.5
Concrete Superstructure	Cu. Yd.	11.6
Preformed Joint Strip Seal	Foot	67
Reinforcement Bars, Epoxy Coated	Pound	1430
Bar Splicers	Each	28
Protective Coat	Sq. Yd.	688
Bridge Deck Scarification, ¾"	Sq. Yd.	661.5
Bridge Deck Latex Concrete Overlay, 21/4"	Sq. Yd.	661.5
Bridge Deck Grooving	Sq. Yd.	633
Deck Slab Repair (Full Depth, Type I)	Sq. Yd.	35
Deck Slab Repair (Full Depth, Type II)	Sq. Yd.	5

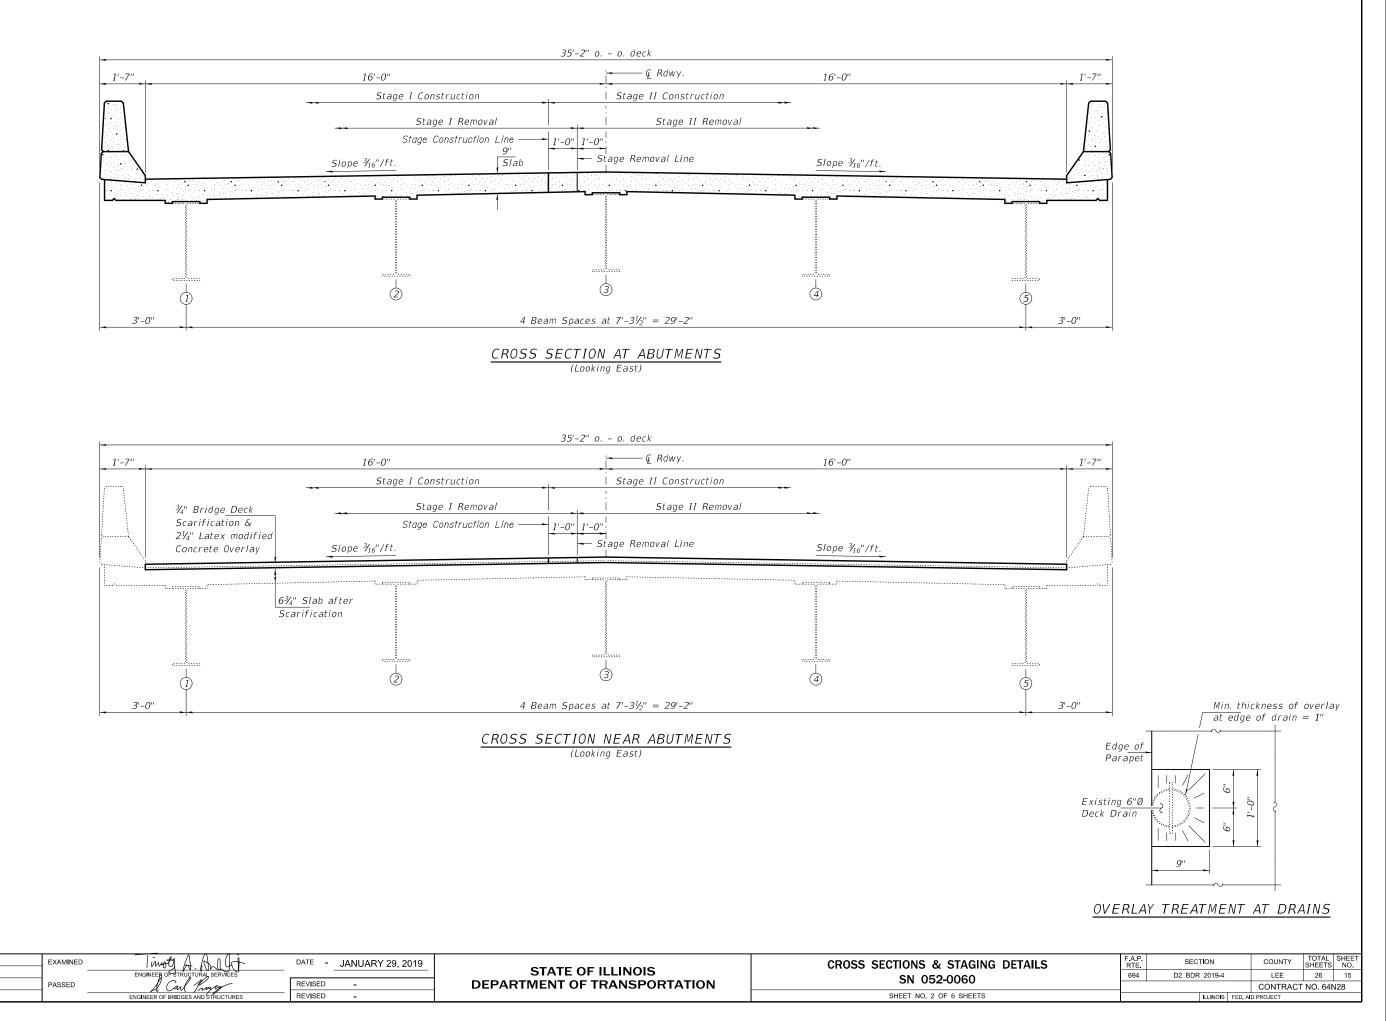



DESIGNED - JSB

CHECKED - SMR


DRAWN - daburdell

CHECKED - JSB SMR

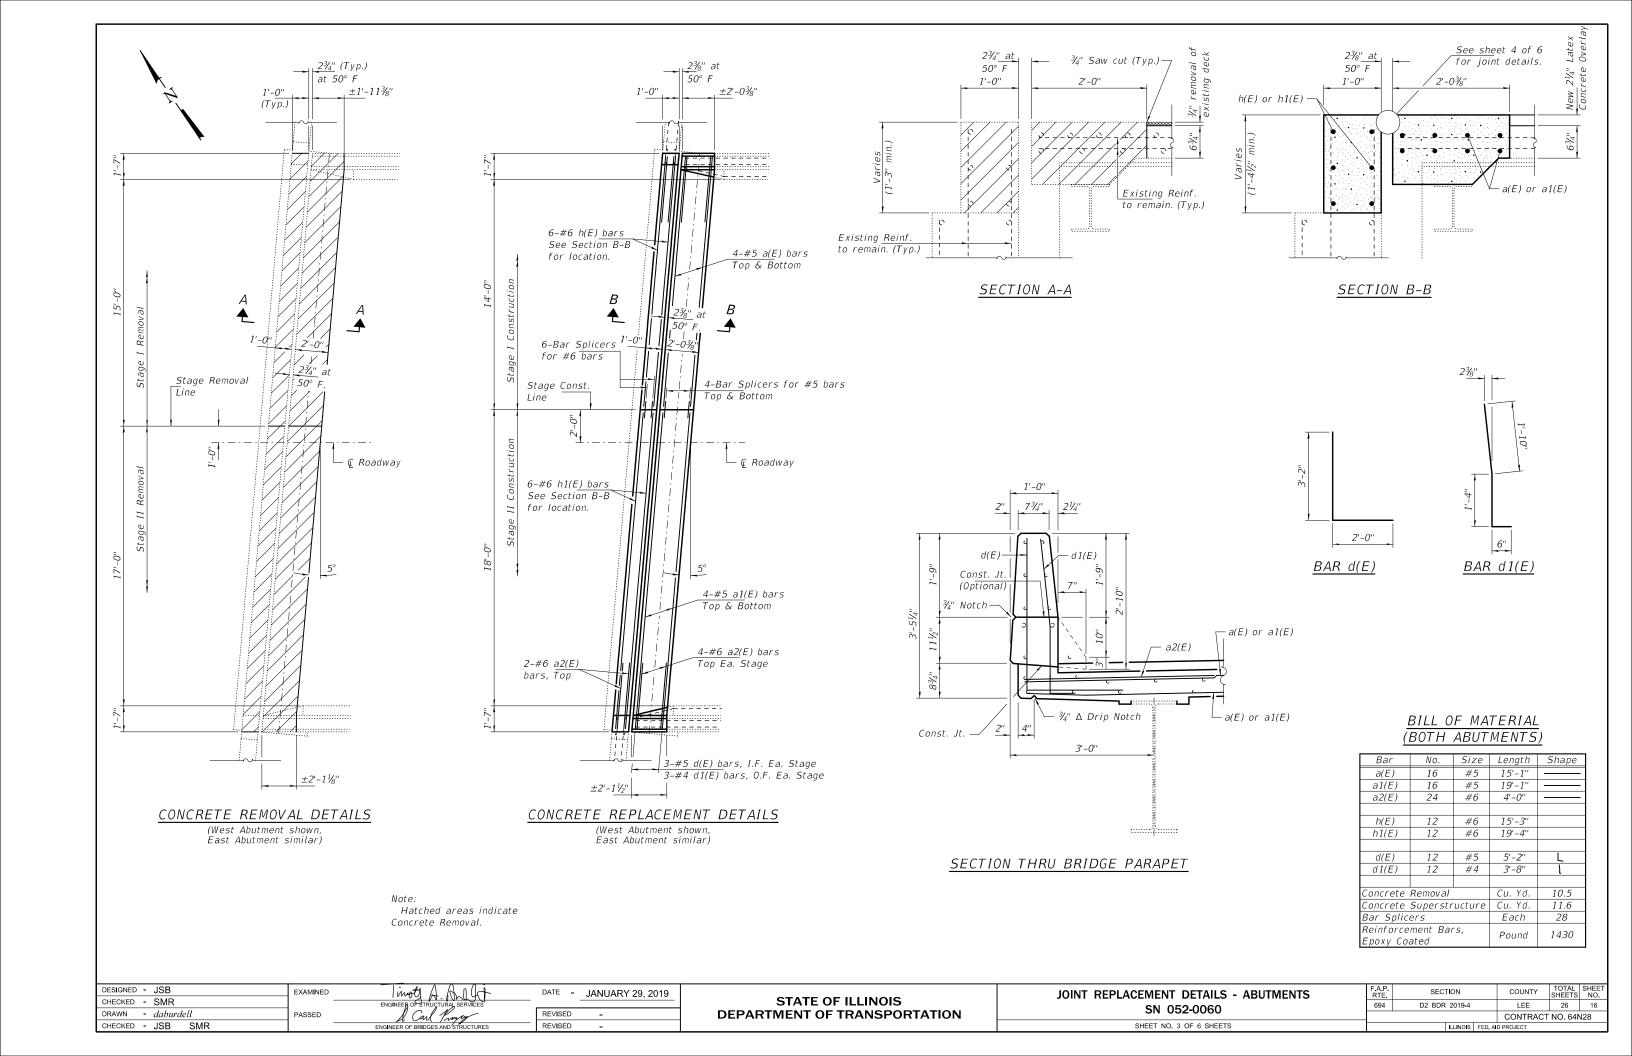





FOR SKEWS ≤ 30° PLAN AT PARAPET



ELEVATION AT PARAPET (Skews ≤ 30°)

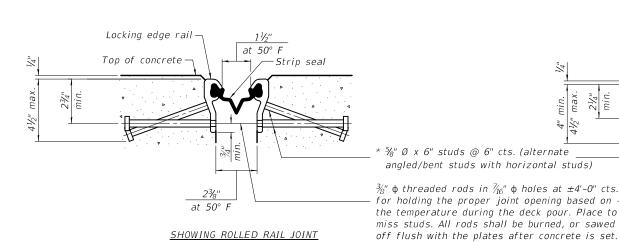

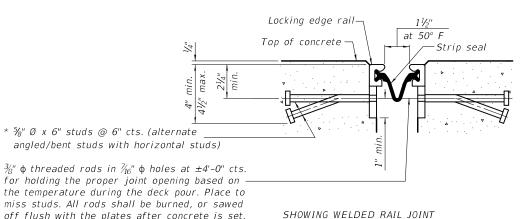

SECTION A-A


* Granular or solid flux filled headed studs conforming to Article 1006.32 of the Std.

Specs., automatically end welded.

<u>ROLLED</u> WELDED RAIL (EXTRUDED) RAIL

LOCKING EDGE RAILS

** Back gouge not required if complete joint penetration is verified by mock-up.



The strip seal shall be made continuous and shall have a minimum thickness of $\frac{1}{4}$ ". The configuration of the strip seal shall match the configuration of the locking edge rails. Open or "webbed" strip seal gland configurations are not permitted. The gland shall be sized for a maximum

The locking edge rails depicted are configured for typical

applications and are conceptual only. The actual configuration

All steel components shall be galvanized after fabrication according to Article 520.03 of the Standard Specifications. The Maximum space between locking edge rail segments shall be $\frac{3}{16}$ " and sealed with a suitable sealant; however, any rail joint within 10' measured perpendicular to the face of the curb or parapet shall be welded as shown in the locking edge

The concrete opening below the strip seal will vary based on the locking edge rail chosen by the Contractor. Deck and parapet lengths shown elsewhere in the plans are dimensioned to the concrete opening, not the joint opening, and are based on the rolled locking edge rail. If the Contractor elects to use a different locking edge rail, dimensional adjustments may be required. One exception to this would be the strip seal joint at the end of the precast bridge approach slab. For these cases the pavement connector length shall be adjusted, not the

according to the manufacturer's recommendation. The manufacturer's recommended installation methods

of the locking edge rails and matching strip seal may vary from manufacturer to manufacturer provided they fit the application and meet the minimum anchorage shown. Flanged edge rails, however, will not be allowed. Locking edge rails may exceed the 4½" maximum depth provided the anchorage system is revised

rated movement of 4 inches.

shall be followed.

rail splice detail.

length of the bridge approach slab.

LOCKING EDGE RAIL SPLICE

The inside of the locking edge rail groove shall be free of weld residue. Rolled rail shown, welded rail similar.

BILL OF MATERIAL

Item	Unit	Total
Preformed Joint Strip Seal	Foot	67

EJ-SS1 LT30/REPS


6-22-18

DESIGNED -	-	JSB	EXAMINED	Timots A. A. a. a.	DATE -	JANUARY 29, 2019
CHECKED -	-	SMR		ENGINEER OF STRUCTURAL SERVICES		0, 1, 10, 11, 10, 10, 10
DRAWN -	-	daburdell	PASSED	d. Carl Prayer	REVISED	-
CHECKED -	-	JSB SMR		ENGINEER OF BRIDGES AND STRUCTURES	REVISED	-

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

PREFORMED JOINT STRIP SEAL SN 052-0060 SHEET NO. 4 OF 6 SHEETS

F.A.P. RTE	SEC.	TION		COUNTY	TOTAL SHEETS	SHEET NO.
694	D2 BDR	LEE	26	17		
			CONTRACT	NO. 641	1 28	

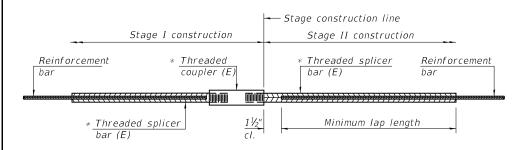


STANDARD BAR SPLICER ASSEMBLY

Threaded splicer bar length = min. lap length + $1\frac{1}{2}$ " + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

		ı	
Location	Bar	No. assemblies	Minimum
Location	size	required	lap length
W. Abut.	#5	8	3'-6"
W. Abut.	#6	6	4'-0''
E. Abut.	#5	8	3'-6"
E. Abut.	#6	6	4'-0''

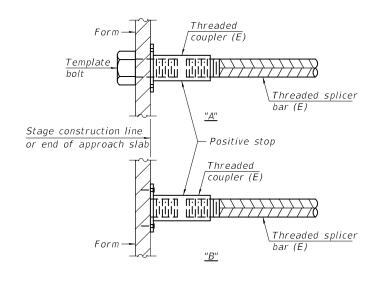


INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.
(E): Indicates epoxy coating.

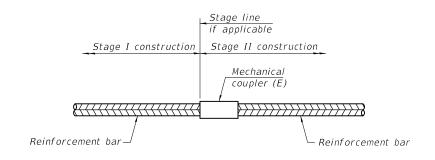

STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required
1		

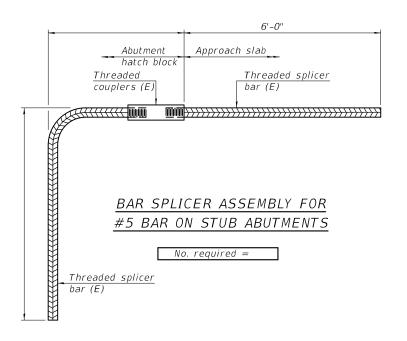

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1


2-17-2017

DEGLOVED IOD		-1 = 4. A A A		
DESIGNED - JSB	EXAMINED	1 mot A. Mil 4t	DATE -	JANUARY 29, 2019
CHECKED - SMR		ENGINEER OF STRUCTURAL SERVICES		
DRAWN - daburdell	PASSED	d. Carl Prayer	REVISED	-
CHECKED - JSB SMR	1	ENGINEER OF BRIDGES AND STRUCTURES	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


BAR

R SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS	F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
SN 052-0060	694	D2 BDR 2019-4	LEE	26	18
311 032-0000			CONTRACT	NO. 64N	128
SHEET NO. 5 OF 6 SHEETS		ILLINOIS FED AL	D PROJECT		

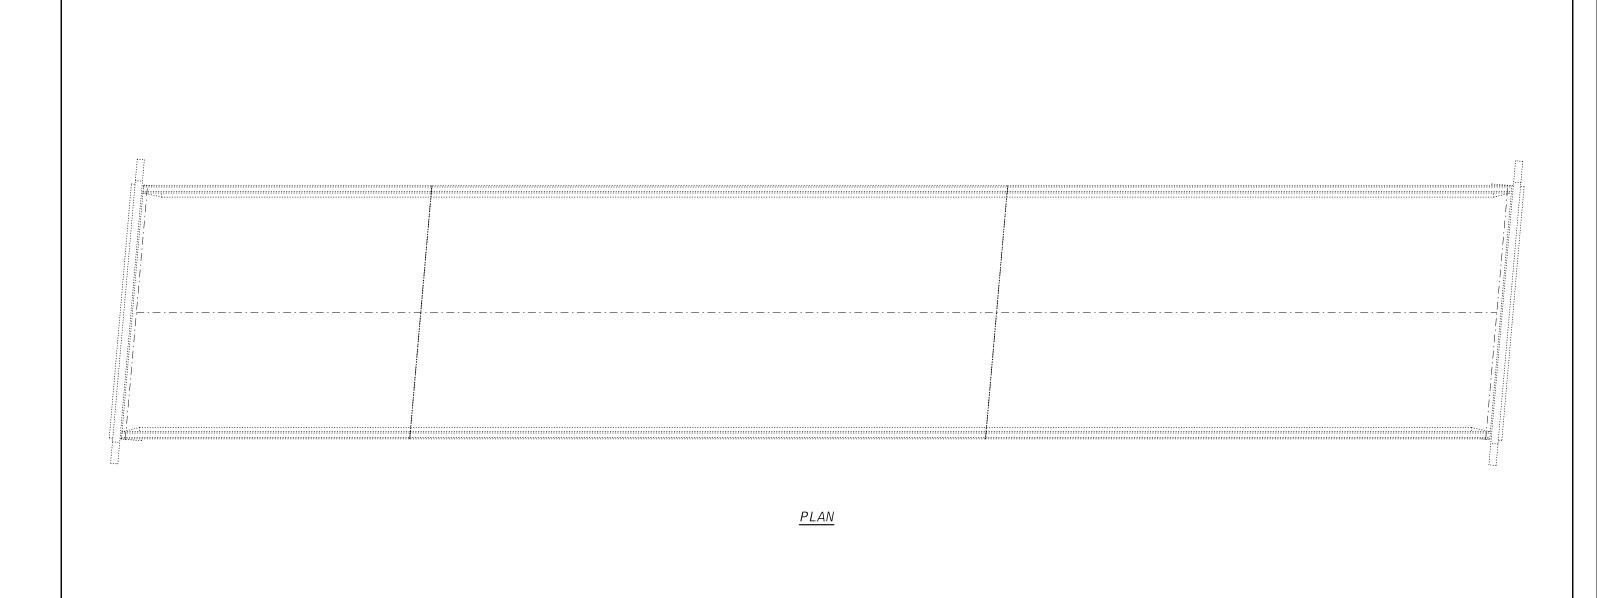

WORK ZONE SIGN DETAILS

ILLINOIS STANDARD G20–I100

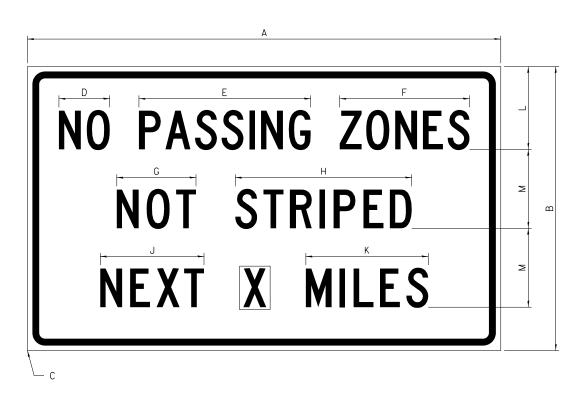

COLOR LEGEND AND BORDER BACKGROUND

BL ACK ORANGE

NON-REFLECTORIZED REFLECTORIZED

SIGN SIZE					[DIMEN	SIONS	5				
SIGN SIZE	Α	В	С	D	Е	F	G	Н	J	K	L	М
60 × 36	60.00	36.00	2.25	6.4	21.80	16.40	10.00	22.40	13.20	15.50	10.50	10.00

SIGN SIZE	SERI	ES BY	LINE	MARGIN	BORDER
SIGN SIZE	1	2	3	MARGIN	DURDER
60 × 36	5C	5C	5C	0.625	0.875

Sign not to scale

GENERAL NOTES


All work to furnish and install these signs shall be included in the cost of the specified traffic control standards and shall not be paid separately.

All Illinois Standard signs shall conform to the latest edition of the "Illinois Standard Highway Signs Book" in effect on the date of invitation for bids.

Signs shall meet the applicable portions of Sections 701 and 720 of the Standard Specifications.

All dimensions are in inches unless otherwise noted.

ILLINOIS STANDARD W8–I107

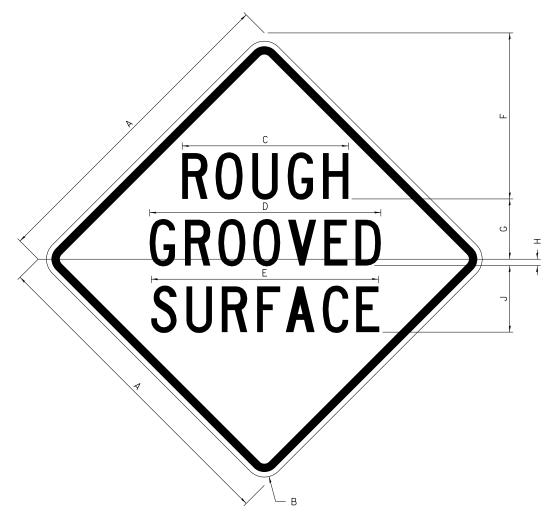

COLOR LEGEND AND BORDER BACKGROUND

BLACK

NON-REFLECTORIZED REFLECTORIZED

SION SIZE		DIMENSIONS							
SIGN SIZE	Α	В	С	D	E	F	G	Н	J
48 × 48	48.00	3.00	25.00	34.80	34.20	24.94	9.00	1.00	10.00


SIGN SIZE	SERI	ES BY	LINE	MARGIN	BUDDED	
31GN 31ZE	1	2	3	WARGIN	BORDER	
48 × 48	7C	7C	7C	1.250	0.750	

Sign not to scale

			1		1			I I			T = T = -
FILE NAME =	USER NAME = vaceksk	DESIGNED	REVISED - <u>3-02</u> -16					F.A.P.	SECTION	COUNTY	SHEETS SI
pw:\\IL084EBIDINTEG.:ll:no:s.gov:PWIDOT\Do	cuments\IDOT Offices\District 2\Projects\64N	P8DRAMM am Develop <u>ment</u> \Studies & Plans\[DesRGWISEDO\CADshee <u>ts\D</u> 2_64N28-sht-details	dgn STATE OF ILLINOIS		REGION 2/DISTRICT 2 STANDARD		694	D2 BDR 2019-4	LEE	26
	PLOT SCALE = 100.0000 '/ in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION							641
	PLOT DATE = Dec-21-2018 01:53:19 PM	DATE	REVISED		SCALE:	SHEET NO. 1 OF 4 SHEETS STA.	TO STA	FED. ROAD	DIST. NO ILLINOIS FED. AI	ID PROJECT	

WORK ZONE SIGN DETAILS

ILLINOIS STANDARD W12–I102

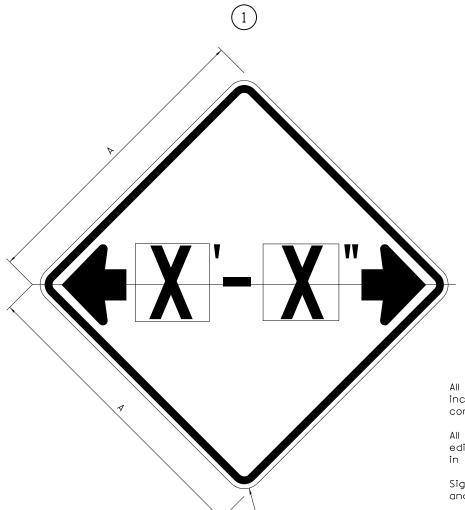

GENERAL NOTES

All work to furnish and install these signs shall be included in the cost of the specified traffic control standards and shall not be paid separately.

All Illinois Standard signs shall conform to the latest edition of the "Illinois Standard Highway Signs Book" in effect on the date of invitation for bids.

Signs shall meet the applicable portions of Sections 701 and 720 of the Standard Specifications.

All dimensions are in inches unless otherwise noted.

LEGEND AND BORDER BACKGROUND

FL ORANGE

NON-REFLECTORIZED REFLECTORIZED


SIGN SI7F	DIMENSIONS					
31GN 31ZE	Α	В				
48 × 48	48.00	3.00				

Illinois Standard signs W12-I102 and W12-I103 shall be 1 Illinois Standard signs will live and all used as described in the special provisions.

SIGN SIZE	SERIES BY LINE	MARGIN	BUDDED	
SIGN SIZE	1	MARGIN	BORDER	
48 × 48	12C	0.750	1.250	

Sign not to scale

ILLINOIS STANDARD W12–I103

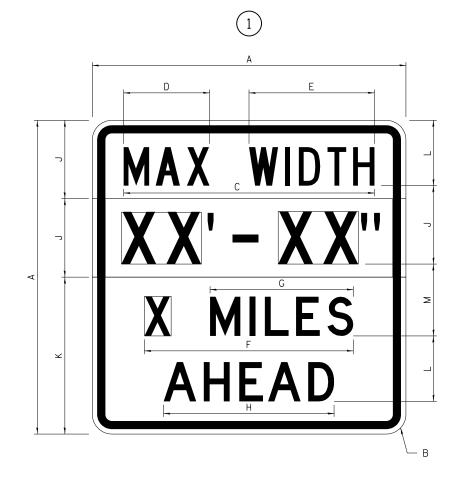

LEGEND AND BORDER BACKGROUND BACKGROUND (WIDTH) BLACK WHITE

NON-REFLECTORIZED REFLECTORIZED FL ORANGE REFLECTORIZED

SIGN SIZE	DIMENSIONS											
SIGN SIZE	Α	В	С	D	Е	F	G	Ι	٦	K	Г	М
48 × 48	48.00	3.00	38.40	13.20	19.20	32.00	22.00	26.20	12.00	24.00	10.00	11.00

SIGN SIZE	S	ERIES	BY LIN	E	MARGIN	BORDER	
310N 31ZE	1	2	3	4	WARGIN		
48 × 48	6C	8D	6D	6D	0.750	1.250	

Sign not to scale

XX'-XX'' WIDTH AND X MILES ARE VARIABLE TOP AND BOTTOM OF BACKGROUND WHITE

FILE NAME =	USER NAME = vaceksk	DESIGNED	REVISED - <u>3-0</u> 2-16	
pw:\\ILØ84EBIDINTEG.:ll:nois.gov:PWIDOT\Do	cuments\IDOT Offices\District 2\Projects\64N	28).R.A.WgN am Develop <u>ment</u> \Studies & Plans\D	e sRGWISED \CABshee <u>ts\D</u> 2_64N28-sht-details	dgn
	PLOT SCALE = 100.0000 ' / in.	CHECKED	REVISED	
	PLOT DATE = Dec-21-2018 01:53:54 PM	DATE	REVISED	

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

	REGION	2 / DISTRICT	2 STANDARD	
SCALE:	SHEET NO. 2	OF 4 SHEETS	STA.	TO STA.

COUNTY SECTION D2 BDR 2019-4

WORK ZONE SIGN DETAILS

ROAD CLOSED TO OVERSIZED LOADS



COLOR


LEGEND AND BORDER BACKGROUND BLACK ORANGE NON-REFLECTORIZED REFLECTORIZED

Permit Loads - Loads Over 13 Feet; 3.0" Radius, 1.3" Border; [NO OVERSIZE -] D; [OVERWEIGHT LOADS] D 85% spacing; [XX MILES AHEAD] D; Table of letter and object lefts.

N 11.7	O 18.1	0 30.0	V 36.2	E 42 . 8	R 48.4	S 54.4	I 60.7	Z 63.5	E 69.5	- 80.8				
0 2.6	V 8.6	E 15.0	R 20.4	W 26.2	E 33.4	I 38.8	G 41.3	H 47.4	T 53.2	L 64 . 5	O 69.9	A 75 . 9	D 82.9	S 88.7
X 7.6	X 13.6	M 25.3	I 32.3	L 35.1	E 40.6	S 46.2	A 57 . 9	H 65.1	E 71.4	A 76.6	D 83.7			

Sign not to scale

STOP LINE SIGN FOR TEMPORARY SIGNALS

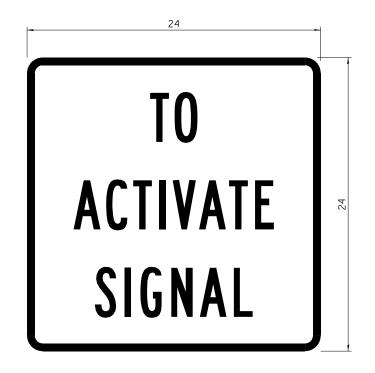

COLOR

LEGEND AND BORDER BACKGROUND BLACK WHITE

NON-REFLECTORIZED REFLECTORIZED

SIGN SIZE	SERIES BY LINE					
SIGN SIZE	1	2	3			
24 × 24	4C	4C	4C			

Sign not to scale

GENERAL NOTES

All work to furnish and install these signs shall be included in the cost of the specified traffic control standards and shall not be paid separately.

All Illinois Standard signs shall conform to the latest edition of the "Illinois Standard Highway Signs Book" in effect on the date of invitation for bids.


Signs shall meet the applicable portions of Sections 701 and 720 of the Standard Specifications.

All dimensions are in inches unless otherwise noted.

FILE NAME =	USER NAME = vaceksk	DESIGNED	REVISED - <u>3-0</u> 2-16						F.A.P.	SECTION	COUNTY	TOTAL SHEET
pw:\\ILØ84EBIDINTEG.:ll:nois.gov:PWIDOT\Do	cuments\IDOT Offices\District 2\Projects\	64N2 EDRAWN om Develop <u>men</u> t\Studies & F	Plans\Da sR&WIS&D \CABshee <u>ts\D</u> 2_64N28-sht-details dgn	STATE OF ILLINOIS		REGION 2/DISTRICT	2 STANDAR	D	694	D2 BDR 2019-4	LEE	26 22
	PLOT SCALE = 100.0000 '/ in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION								T NO. 64N28
	PLOT DATE = Dec-21-2018 01:54:32 PM	DATE -	REVISED -		SCALE:	SHEET NO. 3 OF 4 SHEETS	STA.	TO STA.	FFD. ROAL	DIST. NO. ILLINOIS FED. A		

ENTRANCE SIGN FOR USE WITH TEMPORARY SIGNALS

WORK ZONE SIGN DETAILS

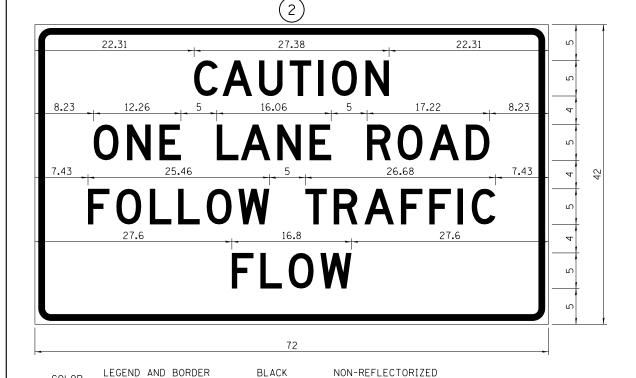

2.25" Radius, 0.88" Border, 0.50" IndenT; [CAUTION] D; [ONE LANE ROAD] D; [FOLLOW TRAFFIC] D; [FLOW] D

This sign shall be installed at entrances located between the temporary sizes at the tempor the temporary signals as shown in the staging plans.


Table Of Widths And Spaces


BACKGROUND

22.31	C 3.36	0.62	A 4.18	0.94	U 3.36	0.94	T 3.04	0.94	I 0.78	1.17	0 3 . 52	1.17	N 3.36	22.31
-------	-----------	------	------------------	------	-----------	------	-----------	------	-----------	------	--------------------	------	-----------	-------

REFLECTORIZED

	0		Ν		Е
8.23	3 . 51	1.17	3.36	1.18	3.04






ORANGE



	F		L		0		W	
27.60	3.05	0.94	3.04	0.94	3 . 52	0.93	4.38	27 . 60

Sign not to scale

STAY IN YOUR LANE

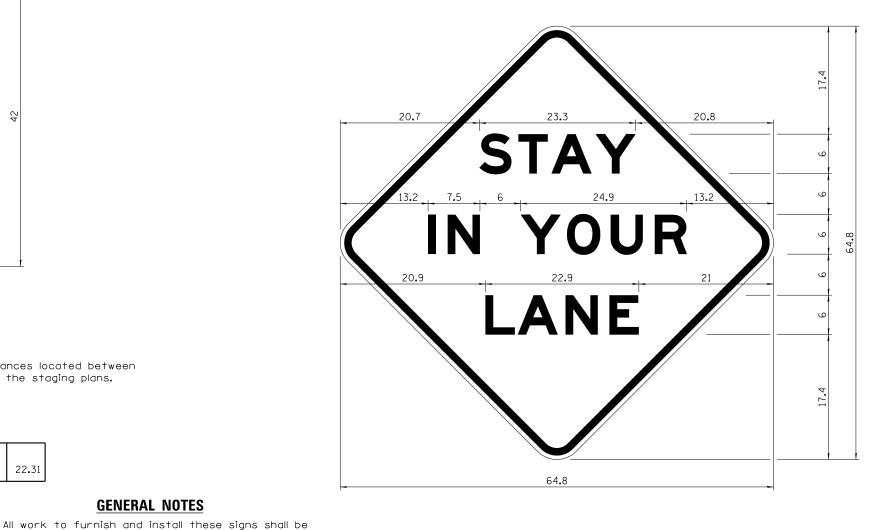

LEGEND AND BORDER BACKGROUND

BL ACK ORANGE NON-REFLECTORIZED REFLECTORIZED

48.0" across sides 3.8" Radius, 1.0" Border, 0.6" Indent; "STAY" E Mod; "IN YOUR" E Mod; "LANE" E Mod;

Table of Letter and Object Lefts

S	Т	Α	Υ
20.7	26.8	31.6	38.0

I	N	Υ	0	U	R	l
13.2	15.9	26.7	33.9	40.5	46.8	

L	Α	N	Е
20.9	25.8	33.1	39.4

Sign not to scale

FILE	E NAME =	USER NAME = vaceksk	DESIGNED	REVISED - <u>3-02</u> -16						F.A.P.	SECTION	COUNTY	TOTAL SHEE
pw:\	\\ILØ84EBIDINTEG.ıllınoıs.gov:PWIDOT\Do	cuments\IDOT Offices\District 2\Projects\64N	28)RAWN am Develop <u>ment</u> \Studies & Plans\I	e RGWISED \CABshee <u>ts\D</u> 2_64N28-sht-details	dgn STATE OF ILLINOIS		REGION 2 / DISTRICT	2 STANDARD)	694	D2 BDR 2019-4	LEE	26 23
		PLOT SCALE = 100.0000 '/ in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION					'		CONTRAC	T NO. 64N28
		PLOT DATE = Dec-21-2018 01:55:22 PM	DATE	REVISED		SCALE:	SHEET NO. 4 OF 4 SHEETS	STA.	TO STA	FED. ROAD	DIST. NO ILLINOIS FED.	AID PROJECT	

GENERAL NOTES

included in the cost of the specified traffic control standards and shall not be paid separately.

and 720 of the Standard Specifications.

All Illinois Standard signs shall conform to the latest edition of the "Illinois Standard Highway Signs Book" in effect on the date of invitation for bids.


Signs shall meet the applicable portions of Sections 701


All dimensions are in inches unless otherwise noted.

TYPICAL PAVEMENT MARKINGS

MEDIAN PAVEMENT MARKING

TYPICAL PAVEMENT MARKING FOR FLUSH MEDIAN AT LEFT TURN LANE

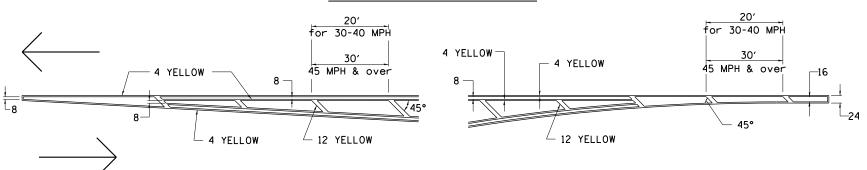



TYPICAL ISLAND OFFSET SHOULDER WIDTH


TYPICAL MARKING FOR **PAINTED ISLANDS**

8 WHITE LANE LINE NOTE: * 45° TO LOCAL TAN. 24 WHITE --8 WHITE 24 WHITE STOP BAR -24 WHITE 45° ANGLE 8 WHITE 8 WHITE 8'-0" [8'-0" [12 WHITE 5 Diagonals Minimum $\langle \Box$ THROUGH TRAFFIC -12 WHITE

STANDARD CROSSWALK MARKING

.. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

See Schedules for Locations

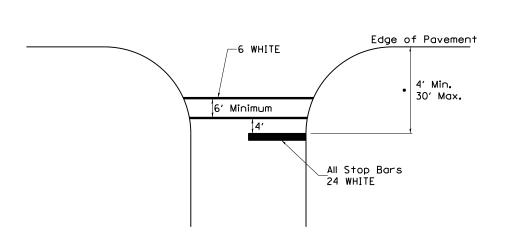


• Distance to the nearest edge of the intersecting roadway in the absence of a marked crosswalk.

FILE NAME =	USER NAME = vaceksk	DESIGNED	REVISED - <u>6-2</u> 7-14	Г
pw:\\ILØ84EBIDINTEG.:ll:no:s.gov:PWIDOT\Do	cuments\IDOT Offices\District 2\Projects\64N	28)RAWN am Develop <u>ment</u> \Studies & Plans\D	e RGWISEDO /CABshee <u>Ze/OD</u> S= 62 N28-sht-details	de
	PLOT SCALE = 100.0000 '/ in.	CHECKED	REVISED	1
	PLOT DATE = Dec-21-2018 01:56:10 PM	DATE -	REVISED -	1

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

REGION 2 / DISTRICT 2 STANDARD SHEET NO. __ OF ___ SHEETS STA. TO STA.

LEE 26 24 CONTRACT NO. 64N28 D2 BDR 2019-4

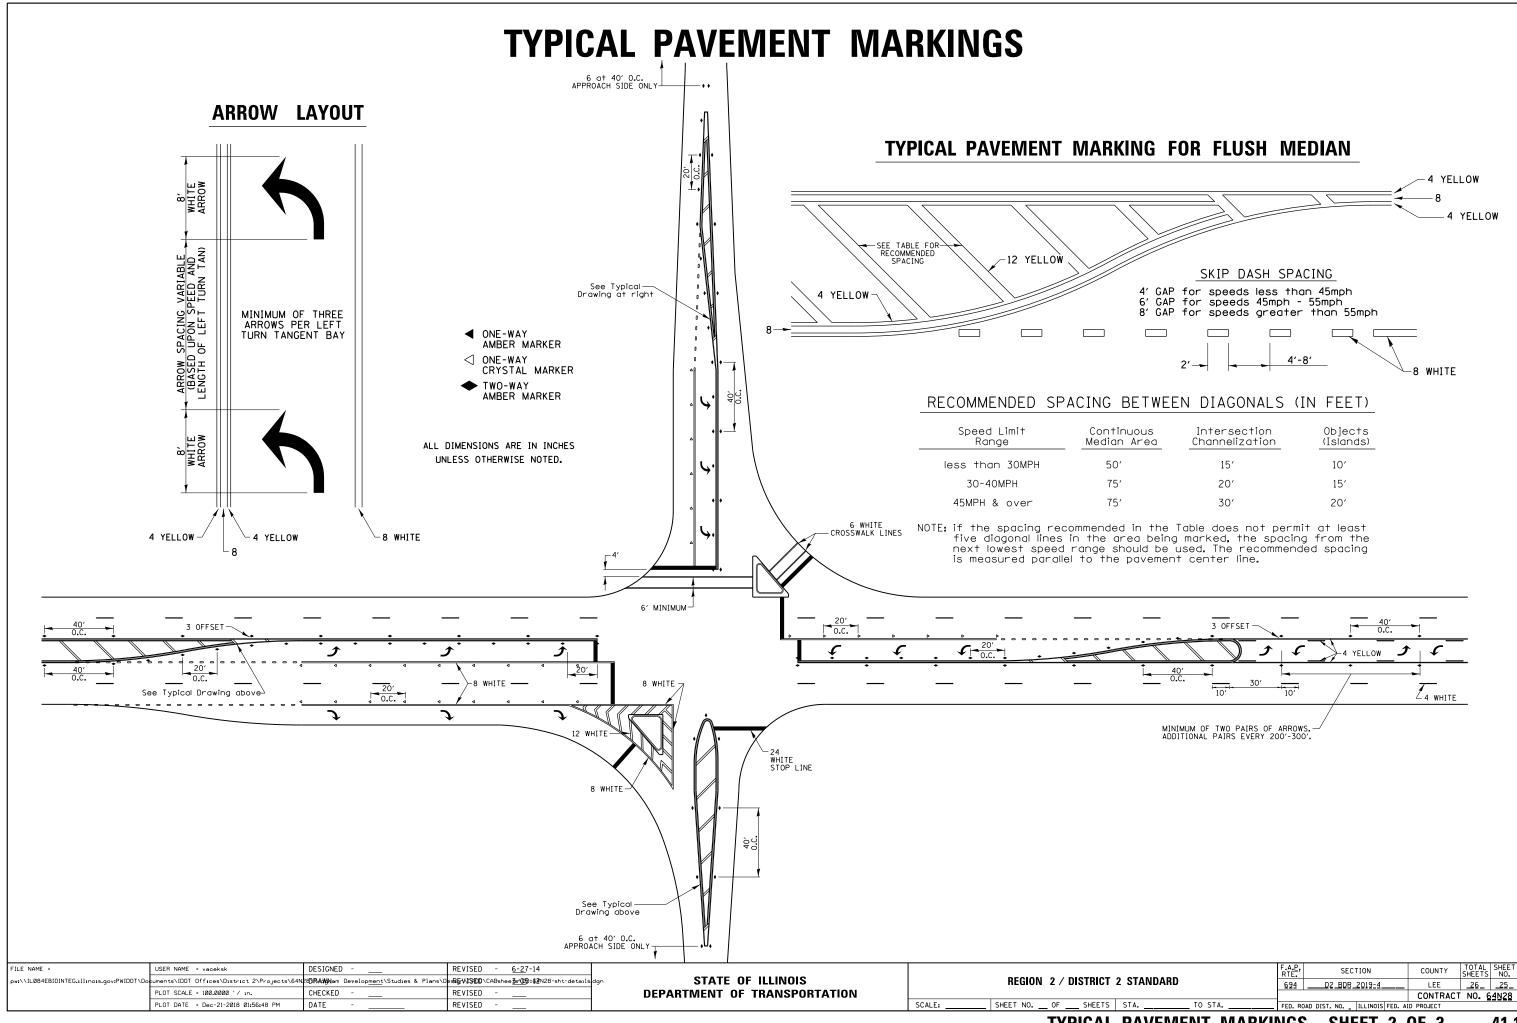


TYPICAL PAVEMENT MARKINGS

TYPICAL PARKING SPACING

22'-25'


Face of Curb

8′

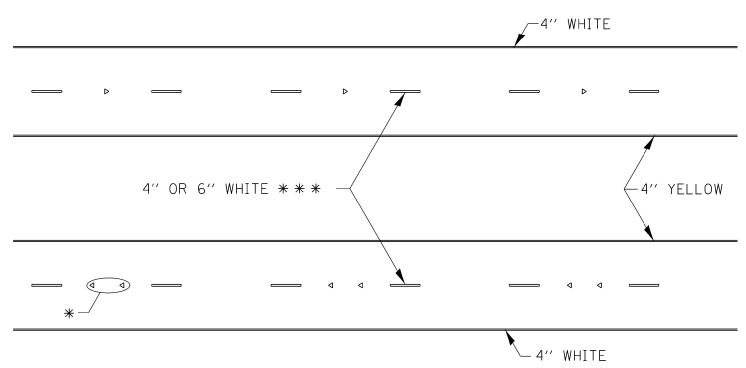

* SEE HIGHWAY STANDARD 781001 FOR SPACING DETAILS. USE DOUBLE MARKERS WHEN ADT > 20,000.

MULTI-LANE / DIVIDED

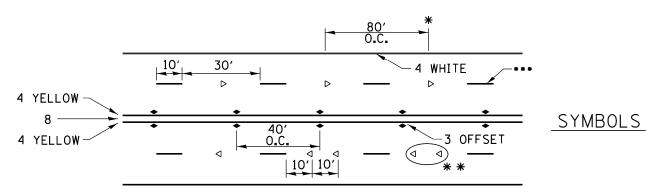

- REDUCE TO 40' O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 MPH LOWER THAN POSTED SPEEDS.
- •• USE DOUBLE MARKERS WHEN ADT ≥ 20,000
- ••• CENTERLINE SKIP DASH PAVEMENT MARKING SPEED LIMIT LESS THAN 40 MPH USE 4" LINE. SPEED LIMIT 40 MPH AND OVER USE 6" LINE.

MULTI-LANE / UNDIVIDED & ONE WAY

(FOR MULTI-LANE UNDIVIDED HIGHWAYS USE THIS DETAIL NOT HIGHWAY STANDARD 781001)

FILE NAME =	USER NAME = hoffmanjd	DESIGNED -	REVISED - 6-27-14	
pw:\\IL084EBIDINTEG.:1l1:no:s.gov:PWIDOT\Do	cuments\IDOT Offices\District 2\Projects\64N	28 3RAdWN am Development\Studies & Plans\D	a -RG-WISEDD \CABshee 8s\2D2-63 N28-sht-detoils	dgn
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED - 11-28-12	
	PLOT DATE = Dec-21-2018 02:09:22 PM	DATE -	REVISED -	

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

20' Min.-

No Parking Zone

20' Min.

No Parking Zone

22'-25'

4 WHITE

20' Min.

Face of Curb

Approach to Signal

20' Min.

Face of Curb

20' Min.

Face of Curb

20' Min.

Approach to Signal

-4 WHITE

TYPICAL PAVEMENT MARKING FOR TWO LANE SECTION - NO PASSING ZONES

No Parking Zone

