

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
D4 BRIDGE DECK SEALING 2020	VARIOUS	ILLINOIS	11	1
CONTRACT NO. 68E90				

INDEX OF SHEETS:


- 1 COVER SHEET
- 2 COMMITMENTS, GENERAL NOTES, AND JOB SPECIFIC NOTES
- 3 SUMMARY OF QUANTITIES
- 4 TYPICAL BRIDGE DECK SECTION
- 5-8 SCHEDULE OF QUANTITIES

HIGHWAY STANDARDS:

- 701006-05
- 701201-05
- 701301-04
- 701400-09
- 701406-12
- 701411-09
- 701426-09
- 701428-01
- 701456-05
- 701602-10
- 701901-08

DISTRICT STANDARDS:

NONE

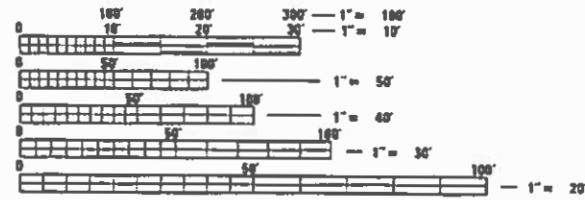

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: RICHARD DOTSON (309) 671-3455
PROJECT MANAGER: MICHAEL JACOBS (309) 671-3460


CATALOG NO. 035726-00D
CONTRACT NO. 68E90

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**PROPOSED
HIGHWAY PLANS**

**VARIOUS ROUTES
SECTION D4 BRIDGE DECK SEALING 2020
PROJECT STP-HPA2(720)
VARIOUS COUNTIES**

C-94-038-19

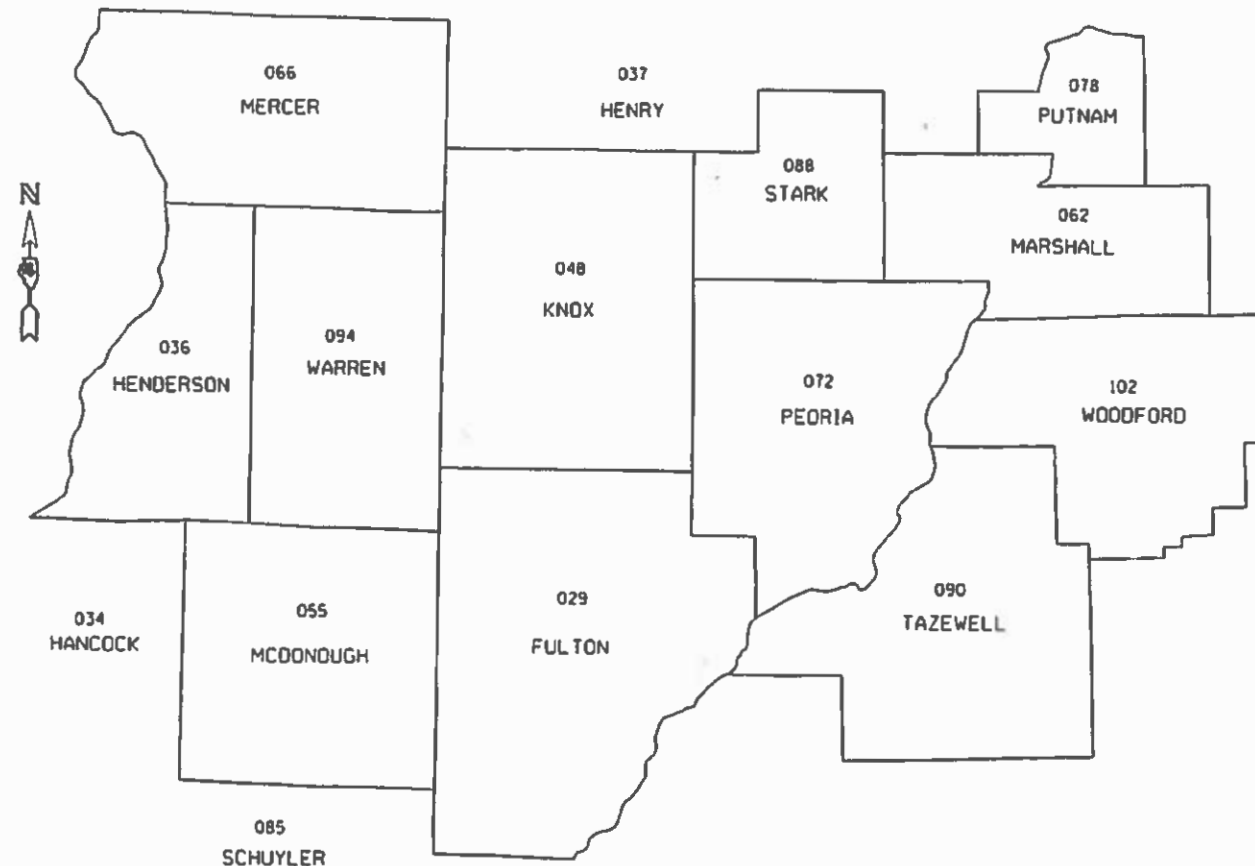

GROSS LENGTH = NA
NET LENGTH = NA

D-94-025-19



PROJECT DESCRIPTION:

BRIDGE DECK SEALING ON VARIOUS STRUCTURES THROUGHOUT DISTRICT 4.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Jan 30, 2020
Kenel A. Garnett, P.E.
REGIONAL ENGINEER

March 20, 2020
E.A. Elk
ENGINEER OF DESIGN AND ENVIRONMENT

March 20, 2020
Garnett, Ken
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION 13

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

COMMITMENTS

Commitments are not to be altered without the written approval of all parties to which the commitment was made.

NO COMMITMENTS HAVE BEEN MADE FOR THIS PROJECT.

JOB SPECIFIC NOTES

Prior to performing any work, the contractor shall coordinate their work effort with the existing construction contracts in their vicinity to alleviate traffic conflicts and assure traffic progression through all work zones.

A flow meter shall be provided by the contractor to accurately measure quantities per bridge. This shall not be paid for separately, but shall be included in the contract unit price per square feet for "Bridge Deck Concrete Sealer".

When applicable, standard 701426 may be used if sealer dries in less than 1 hour.

MODEL: Default
FILE NAME: p:\pub\lanscom\dat\illinois.gov\PWIDOT\Documents\DOT_Offices\District_4\Projects\ID4_68E90\CAD\data\CAD\sheet\68E90-Sheet-5.dwg

USER NAME = bourisba	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = 1/31/2020	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

COMMITMENTS, GENERAL NOTES, AND JOB SPECIFIC NOTES

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	2
			CONTRACT NO. 68E90	
		ILLINOIS	FED. AID PROJECT	

BRIDGE DECK CONCRETE SEALER (1 OF 6)

STRUCTURE NUMBER	FACILITY CARRIED	FEATURE CROSSED	LOCATION	BRIDGE DECK LENGTH FOOT	BRIDGE DECK WIDTH FOOT	BRIDGE DECK AREA SQ FT	BRIDGE PARAPET AREA SQ FT
0340511	US 136 (EB)	E FORK La MOINE	1.4 MI W JCT 61 136	253.30	40.00	10025.00	2240
0340512	US 136 (WB)	E FORK LA MOINE	1.4 MI W JCT 61 136	253.30	40.00	10025.00	2240
0360007	ILL 96	SILVER CREEK	2 MI W OF LOMAX	42.00	32.10	1348.20	574
0360009	ILL 96	DUGOUT CREEK	.5 MI E OF LOMAX	160.30	31.50	5049.45	1402
0360010	ILL 94	HONEY CR	1.5 MI S STRONGHURST	83.00	30.80	2556.40	861
0360022	ILL 94	HENDERSON	1 MI S BALD BLUFF	103.30	31.30	3233.29	1003
0360025	ILL 94	SMITH CREEK	.25MI N of IL 164	32.00	38.90	1244.80	504
0360035	US 34	CHINN ST GULFPORT	0.25 MI E MISS RIV	150.40	74.00	11129.60	1333
0360036	US 34	BN RR (079194E)	0.75 MI E MISS RIV	192.00	66.90	12844.80	1624
0360039	ILL 164	HENDERSON CREEK	3 MI N OF GLADSTONE	561.00	31.90	17895.90	4207
0360040	IL 94	N HENDERSON CREEK	3.6MI W OF IL 135	292.20	30.00	8766.00	2325
0360041	ILL 94	JINKS HOLLOW CREEK	3.5 MI N BIGGSVILLE	95.00	30.30	2878.50	945
0360042	ILL 94	FALL CREEK	4.3 MI N JCT 94&164	120.80	31.30	3781.04	1126
0360043	ILL 94	HENDERSON CREEK	1.25 MI S BALD BLUFF	362.00	31.80	11511.60	2814
0360044	ILL 96	CAMP CREEK	1 MI E. DALLAS CITY	137.50	31.40	4317.50	1243
0360045	IL 96	WEAVER CREEK	.75 MI W OF LOMAX	147.00	31.70	4659.90	1309
0360046	ILL 164	S HENDERSON CREEK	.7 MI N OF GLADSTONE	189.00	32.00	6048.00	1603
0360047	ILL 94	BNSFRR/HENDERSON	N EDGE BIGGSVILLE	429.20	32.00	13734.40	3284
0360049	US 34EB	CRYSTAL LK DR DITCH	1 MI E OF GULFPORT	89.60	39.40	3530.24	907
0360050	US 34WB	CRYSTAL LK DR DITCH	1 MI E OF GULFPORT	89.60	39.40	3530.24	907
0360051	ILL 94	DUGOUT CREEK	.5 MI S TERRE HAUTE	82.00	32.00	2624.00	854
0360052	US 34	P.D. CREEK	7.5 MI W BIGGSVILLE	115.00	40.00	4600.00	1085
0360053	US 34	LONE TREE CREEK	6.5 MI W BIGGSVILLE	68.00	40.00	2720.00	756
0360054	ILL 94	DIXSON CREEK	0.24 M N STRONGHURST	63.00	32.00	2016.00	721
0360055	ILL 94 & 116	WOLF CR	2.8 MI N STRONGHURST	63.00	32.00	2016.00	721
0360062	US 34EB	S. HENDERSON CR	EAST EDGE BIGGSVILLE	310.00	40.00	12400.00	2232
0360063	US 34WB	S. HENDERSON CR	E EDGE BIGGSVILLE	310.00	40.00	12400.00	2232
0360065	IL94/116	US 34	SW OF BIGGSVILLE	211.00	66.00	13926.00	1519.2
0360069	ILL 94	MIDDLE CREEK	1 MI N STRONGHURST	78.00	32.00	2496.00	826
0360070	ILL 164	SMITH CREEK	2.3 MI E OF OQUAWKA	130.00	32.00	4160.00	1190
0360071	CARMAN RD	HONEY CREEK	2.3 MI N OF ILL 96	210.00	32.00	6720.00	1750
0360072	ILL 94 & 116	ELLISON CREEK	1.8 MI N STRONGHURST	111.00	32.00	3552.00	1057
0360073	CARMAN RD	ELLISON CREEK	3 MI S US 34	200.00	36.00	7200.00	1440
PAGE 1 SUBTOTAL						214,939.86	48,834.20
PAGE 1 TOTAL						263,774.06	

MODEL: Default
 FILE: Model: ProjectRoom.dwg
 PROJECT: RWDOT\Documents\DOT_Offices\Illinois\Projects\104_68E90\CAD\Drawings\68E90-Sheet-5.dwg

USER NAME = bourisba	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = 1/31/2020	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES			
SCALE:	SHEET 1	OF 7 SHEETS	STA. TO STA.

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	5
CONTRACT NO. 68E90				
ILLINOIS FED. AID PROJECT				

BRIDGE DECK CONCRETE SEALER (2 OF 6)							
STRUCTURE NUMBER	FACILITY CARRIED	FEATURE CROSSED	LOCATION	BRIDGE DECK LENGTH FOOT	BRIDGE DECK WIDTH FOOT	BRIDGE DECK AREA SQ FT	BRIDGE PARAPET AREA SQ FT
0370105	TR 399-100N	I-74	1 MI SW OF WOODHULL	223.00	24.00	5352.00	1841
0370177	ILL 78	INDIAN CR	.4 MI S OF US 34	121.00	36.00	4356.00	871.2
0480007	EB I-74	BNSF RR (004648T)	N.GALESBURG INTERCH	173.00	30.20	5224.60	1491
0480008	WB I-74	BNSF RR (004648T)	N GALESBURG INTERCH	178.00	30.20	5375.60	1526
0480009	EB I-74	MAIN (FAU 6800)	GALESBURG INERCH	178.00	30.20	5375.60	1526
0480010	WB I-74	E. MAIN ST	GALESBURG INTERCH	187.00	43.80	8190.60	1589
0480011	WB I-74	TR 205	1 MI W JCT US 150	112.00	38.60	4323.20	1064
0480012	EB I-74	TR 205	1 MI W OF US 150	112.00	38.60	4323.20	1064
0480019	WB US 34	I-74	NE OF GALESBURG	264.00	47.00	12408.00	2128
0480020	EB US 34	I-74	NE OF GALESBURG	264.00	47.00	12408.00	2128
0480021	US 34 WB	US 150	N CL OF GALESBURG	239.00	45.50	10874.50	1953
0480022	US 34 EB	US 150	N CL OF GALESBURG	239.00	45.50	10874.50	1953
0480026	US 150	POPE CR	2 M S OF ILL 17	135.50	33.00	4471.50	1229
0480029	US 150	LAKE STOREY	1 MI N OF US 34	33.00	88.80	2930.40	237.6
0480030	US 150	INTERSTATE 74	1 MI E OF KNOXVILLE	225.90	32.80	7409.52	1861
0480048	BRICKYARD ROAD	I-74	1 MI NW KNOXVILLE	291.00	24.00	6984.00	2317
0480049	MARKET ST (MS 7350)	I-74	IN KNOXVILLE	231.00	24.00	5544.00	1897
0480050	TR 235	I-74	8 MI E OF KNOXVILLE	243.00	26.50	6439.50	1981
0480053	TR 253	I-74	6 MI E SPOON RIVER	230.00	26.40	6072.00	1890
0480058	KNOX ST	I-74	S OF GALESBURG	257.00	28.00	7196.00	2079
0480059	CH 7	I-74	1 MI N GALESBURG INT	231.00	29.90	6906.90	1897
0480060	CH 37	I-74	1.5 MI N US-34 INTER	222.00	24.00	5328.00	1834
0480062	TR 89	I-74	2.5 MI S HENDERSON CO	223.00	24.00	5352.00	1841
0480063	TR 21	I-74	4 MI SW OF WOODHULL	223.00	24.00	5352.00	1841
0480065	TR 74 FARNHAM ST	US 34 BYPASS	W OF I-74&34	184.00	24.00	4416.00	1568
0480069	FREMONT ST FAU 6790	US 34 BYPASS	1.13 M N OF IL41/164	205.00	28.50	5842.50	1715
0480073	US 34 WB	W. MAIN ST	0.3 MI W IL 41	182.00	38.50	7007.00	1310.4
0480074	US 34 EB	W MAIN ST	0.3 MI W IL 41	182.00	38.50	7007.00	1310.4
0480076	WB US 34	CEDAR CREEK	SW EDGE OF GALESBURG	241.00	42.40	10218.40	1967
0480077	EB US 34	CEDAR CREEK	SW EDGE OF GALESBURG	202.00	40.00	8080.00	1694
0480080	ILL 180	SPOON RIVER	1 MI N WILLIAMSFIELD	433.00	30.00	12990.00	3311
0480081	ILL 17	FITCH CREEK	2 MI W OF LAFAYETTE	66.30	32.00	2121.60	744
0480082	ILL 180	WALNUT CREEK	2.5M S OF ILL 17	194.00	32.00	6208.00	1638
PAGE 2 SUBTOTAL						222,962.12	55,296.60
PAGE 2 TOTAL						278,258.72	

MODEL: Default
 FILE: \\nas0101.pw.state.il.us\pub\baronm.d\at\links\gov\PIWDOT\Documents\DOT_Offices\IDirect_4\Projects\ID4_68E90\CAD\Drawn\68E90-Sheet_5.dwg

USER NAME = bourisba	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = 1/31/2020	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULE OF QUANTITIES

SCALE: SHEET 2 OF 7 SHEETS STA. TO STA.

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	6
			CONTRACT NO. 68E90	
		ILLINOIS	FED. AID PROJECT	

BRIDGE DECK CONCRETE SEALER (3 OF 6)

STRUCTURE NUMBER	FACILITY CARRIED	FEATURE CROSSED	LOCATION	BRIDGE DECK LENGTH	BRIDGE DECK WIDTH	BRIDGE DECK AREA	BRIDGE PARAPET AREA
				FOOT	FOOT	SQ FT	SQ FT
0480083	IL 97	LITTLERS CREEK	2 MI N OF RAPATEE	115.00	32.00	3680.00	1085
0480084	US 150	SPOON RIVER TRIB.	3.8 MI W JCT 180/150	95.00	32.80	3116.00	945
0480085	IL 180	CADWELL CR	2 MI N WILLIAMSFIELD	81.20	31.50	2557.80	848
0480086	IL 180	CADWELL CR	1.5 MI N WILLIAMSFIELD	125.00	31.50	3937.50	1155
0480087	FAP 574 (IL 41)	BNSF RR	S OF GALESBURG	158.00	40.00	6320.00	1386
0480088	US 150	HENDERSON CREEK	6.3 MI N OF US 34	112.00	36.00	4032.00	1064
0480089	FAS 1195 IL 180	BR BRANDYWINE CR	0.5 MI N OF US 150	93.80	40.00	3752.00	937
0480090	FAI 74EB	HENDERSON CREEK	5.4 MI S HENRY CO LI	107.50	40.00	4300.00	774
0480091	FAI 74WB	HENDERSON CREEK	5.4 MI S HENRY CO LI	103.80	40.00	4152.00	747.36
0480096	US 150	BN RR(063001F)	3 M SE GALESBURG	190.00	36.00	6840.00	1368.00
0480097	ILL 97	LITTLE HAW CR	4 MI NW OF MAQUON	77.40	32.00	2476.80	557.28
0480098	ILL 97	HAW CREEK TRIB.	6.5 MI NW OF MAQUON	78.80	32.00	2521.60	567.36
0480099	FAS 1400-CH 9	EB and WB I 74	Knoxville Interchang	401.30	56.00	22472.80	2889.36
0480100	IL 97	Spoon River	1 MI SE of Maquon	856.70	32.00	27414.40	6168.24
0480101	WB I 74	BN(079799R)&Lincoln	0.73MI S of US 34	324.00	40.00	12960.00	2332.80
0480102	EB I 74	BN(079799R)&Lincoln	0.73MI S of US 34	324.00	40.00	12960.00	2332.80
0480104	FAI 74 EB	Pope Creek	1 mi south of Henry	131.70	40.00	5268.00	948.24
0480105	FAI 74 WB	Pope Creek	1 mi s Henry Co line	114.40	40.00	4576.00	823.68
0486022	US 150 (MAIN ST)	CEDAR CREEK, BNSF	500 BLK W. MAIN	269.50	56.00	15092.00	2167
0550005	US 67	TROUBLESOME CREEK	1.7 MI S OF US 136	76.00	32.30	2454.80	0
0550009	ILL 61	BN RR (072826L)	SOUTH OF COLMAR	247.00	33.00	8151.00	2009
0550021	CH 8	E FORK LAMOINE	1 MI N COLCHESTER	204.00	28.00	5712.00	1708
0550026	US 67	TOWN CREEK FORK	.1 MI S OF ILL 9	72.50	80.00	5800.00	788
0550028	ILL 9	TOWN FORK CREEK	.75 MI W OF US 67	68.00	32.00	2176.00	756
0550029	SB US 67	E FORK LAMOINE	1 MI N OF MACOMB	171.40	40.00	6856.00	1480
0550030	NB US 67	E FORK LAMOINE	1 MI N OF MACOMB	171.40	40.00	6856.00	1480
0550031	SB US 67	E FORK CROOKED	1.2MI S WARREN CO	73.80	38.00	2804.40	797
0550032	NB US 67	E FORK CROOKED	1.21MI S WARRN CO	73.80	38.00	2804.40	797
0550042	ILL 9	BAPTIST CREEK	2 MI E BLANDINSVILLE	74.90	31.50	2359.35	804
0550043	ILL 9	SPRING CREEK	4.3 MI E BLANDINSVIL	56.00	31.50	1764.00	672
0550048	US 67	CARTER CREEK	1.3 MI S OF INDUSTRY	77.00	34.00	2618.00	819
0550049	US 67	GRINDSTONE CR	N EDGE OF INDUSTRY	98.10	34.00	3335.40	967
0550052	IL 336EB	BNSF RR	SW OF TENNESSEE	282.00	40.00	11280.00	2254
PAGE 3 SUBTOTAL						213,400.25	44,427.12
PAGE 3 TOTAL						257,827.37	

MODEL: Default
FILE: \\nas101.psu.edu\pub\baronm.dar\illinois.gov\PIWDOT\Documents\DOT_Offices\Illinet_4\Projects\ID4_68E90\CAD\Draws\CAD\Sheets\68E90-Sheet_5.dwg

USER NAME = bourisba	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = 1/31/2020	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES			
SCALE:	SHEET 3	OF 7 SHEETS	STA. TO STA.

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	7
				CONTRACT NO. 68E90
		ILLINOIS	FED. AID PROJECT	

BRIDGE DECK CONCRETE SEALER (4 OF 6)

STRUCTURE NUMBER	FACILITY CARRIED	FEATURE CROSSED	LOCATION	BRIDGE DECK LENGTH FOOT	BRIDGE DECK WIDTH FOOT	BRIDGE DECK AREA SQ FT	BRIDGE PARAPET AREA SQ FT
0550053	IL 336WB	BNSF RR	SW OF TENNESSEE	282.00	40.00	11280.00	2254
0550060	FAP 315 IL 336EB	TRIB KILLJORDAN CR	SW OF MACOMB	186.00	41.30	7681.80	1582
0550061	FAP-407 (IL-336WB)	Trib Killjordon Crk	SW of Macomb	186.50	41.30	7702.45	1586
0550063	US 136EB/WB	IL 336	app 2mi w of Macomb	246.00	74.30	18277.80	1771.2
0550067	ADAMS ST	IL 336	1 Mi N. US 136	202.50	30.00	6075.00	1698
0550079	IL 9	SHAW CREEK	0.75 MI E OF ILL 41	94.70	32.00	3030.40	943
0550080	NB US 67	FARMERS FORK	1 MI S OF ILL 9	118.50	50.00	5925.00	853.2
0550081	SB US 67	FARMERS FORK	1 MI S OF ILL 9	118.50	40.00	4740.00	1110
0550082	ILL 95	BN RR (063798L)	.5 MI E OF ILL 41	150.00	32.00	4800.00	1080
0550083	ILL 61	La MOINE RIVER	1 MI S OF COLMAR	478.20	32.00	15302.40	3627
0550097	IL 9	N Fork Lamoine River	6 MI E OF IL 116	235.00	32.00	7520.00	1692
0620003	ILL 17	ILL RIVER	9.55 MI W OF ILL 89	1571.00	26.00	40846.00	5734
0620029	ILL 89	SANDY CREEK	1.87 MI S OF ILL 18	283.00	32.00	9056.00	906
0620036	ILL 18	ILL RIVER, CROMWELL	1.22 MI E OF ILL 29	1719.00	23.00	39537.00	0
0620038	IL 17/40	UP RR	AT CAMP GROVE	132.00	32.00	4224.00	924
0620040	I-39/US 51(SB)	N FK SANDY CREEK	1.5 MI S OF ILL 18	80.00	40.00	3200.00	584
0620041	I-39/US 51(NB)	N FK SANDY CREEK	1.99 MI S OF ILL 18	74.50	40.00	2980.00	544
0620042	I-39/US 51(SB)	SANDY CREEK	2.60 MI S OF ILL 18	95.50	40.00	3820.00	697
0620043	I-39/US 51(NB)	SANDY CREEK	2.61 MI S OF ILL 18	95.50	40.00	3820.00	697
0620045	I-39/US 51(SB)	TR 39 (FRTG RD WEST)	3.36 MI S OF ILL 18	129.00	40.00	5160.00	993
0620046	I-39/US 51(NB)	TR 39 (FRTG RD WEST)	3.37 MI S OF ILL 18	115.00	40.00	4600.00	840
0620048	CH 14	I-39/US 51	2.19 MI N OF ILL 17	240.00	34.00	8160.00	1680
0620049	TR 69C	I-39/US 51	1 MI N OF ILL 17	250.00	34.00	8500.00	1750
0620050	IL 17/FAP 649	I-39/US 51	.45 MI W OF IL 251	229.00	66.00	15114.00	1668
0620051	I-39/US 51 SB	BNSF RR	1.15 MI S OF ILL 17	162.70	39.80	6476.00	1204
0620052	I-39/US 51 NB	BNSF RR	1.14 MI S OF ILL 17	162.00	40.20	6512.00	1085
0620053	CH 4	I-39/US 51	2.02 MI S OF ILL 17	228.00	34.00	7752.00	1596
0620054	FAS 369	I-39/US 51	3 MI S OF IL 17	229.00	28.00	6412.00	1603
0620055	TR 121A	I-39/US 51	5 MI S OF IL 17	228.00	28.00	6384.00	1596
0620056	ILL 29	THENIUS CREEK	.25 MI N OF SPARLAND	136.00	40.00	5440.00	952
0620057	ILL 29	GIMLET CREEK	JCT. ILL 29 & 17	76.00	58.00	4408.00	570
0620058	IL 26	SANDY CREEK	.03 MI S OF IL 18	180.00	32.00	5760.00	1260
0620059	ILL 17	SENACHWINE CR	4 MI W OF SPARLAND	79.00	32.00	2528.00	833
PAGE 4 SUBTOTAL						293,023.85	45,912.40
PAGE 4 TOTAL						338,936.25	

MODEL: Default
 FILE: \\p:\pub\baronm.d\at\links\gov\PI\DOT\Documents\DOT_Offices\Illinet\4\Projects\ID4_68E90\CAD\Drawings\CAD\Sheets\68E90-Sheet_5.dwg

USER NAME = bourisba	DESIGNED	REVISED
	DRAWN	REVISED
PLOT SCALE = 100.0000' / in.	CHECKED	REVISED
PLOT DATE = 1/31/2020	DATE	REVISED

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES			
SCALE:	SHEET 4	OF 7 SHEETS	STA. TO STA.

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	8
			CONTRACT NO. 68E90	
		ILLINOIS FED. AID PROJECT		

BRIDGE DECK CONCRETE SEALER (5 OF 6)

STRUCTURE NUMBER	FACILITY CARRIED	FEATURE CROSSED	LOCATION	BRIDGE DECK LENGTH	BRIDGE DECK WIDTH	BRIDGE DECK AREA	BRIDGE PARAPET AREA
				FOOT	FOOT	SQ FT	SQ FT
0620060	ILL 26	CROW CREEK	6.3 MI S OF ILL 17	175.00	34.00	5950.00	1225
0620061	ILL 26	CROW CREEK	6.64 MI S OF ILL 17	157.00	35.00	5495.00	1099
0620062	ILL 40	CAMP RUN	1.5 M S CAMP GROVE	47.00	32.00	1504.00	329
0620063	ILL 26	STRAWN CREEK	3.61 MI S OF IL 17	81.00	32.00	2592.00	567
0620064	ILL 26	STRAWN RUN CREEK	IN LACON	57.00	32.00	1824.00	399
0620066	ILL 26	PIGEON CREEK	4.01 MI S OF IL 17	94.00	32.00	3008.00	658
0620070	ILL 26	BROWN RUN	3.2 MI. S. OF RT 18	131.00	32.00	4192.00	917
0620071	ILL 251	SANDY CREEK	1.85 MI S OF ILL 18	75.50	30.00	2265.00	809
0620072	ILL 17	SENACHWINE CREEK	3.5 MI W OF SPARLAND	140.00	32.00	4480.00	1260
0620085	ILL 251	SANDY CREEK	2.47 MI S OF ILL 18	77.00	32.00	2464.00	819
0620086	IL 89	BNSFRR/Crow Creek	7.76 mi s of IL 17	679.30	34.00	23096.20	48909.6
0660007	ILL 94	CAMP CREEK	5 MI N OF ALEDO	130.10	31.80	4137.18	1191
0660008	ILL 94	EDWARDS RIVER	1.9 MI N OF ILL 17	300.60	32.00	9619.20	2384
0660009	ILL 94	POPE CREEK	3.9 MI S OF ILL 17	148.00	32.00	4736.00	1316
0660010	ILL 94	N. HENDERSON CR	2.4 MI N OF ILL 135	103.00	31.70	3265.10	1001
0660013	ILL 94	DUCK CREEK	4 MI N OF LITTLE YORK	112.90	32.20	3635.38	1070
0660014	4TH ST	POPE CREEK	IN KEITHSBURG	146.00	32.00	4672.00	1302
0660015	US 67	DONAHUE CREEK	1.6 MI N OF IL 17	83.50	39.40	3289.90	865
0660016	US 67	TOMS CREEK	025 MI N ALEXIS WYE	104.70	32.40	3392.28	1013
0660017	US 67	EDWARDS RIVER	2 MI N OF VIOLA	529.00	39.40	20842.60	3983
0780004	ILL 29	SENACHWINE CR TRIB	1 MI N OF PUTNAM	37.50	36.00	1350.00	2700
0780005	ILL 29	ILL RIVER TRIB	3.17 MI N OF ILL 18	30.00	41.00	1230.00	490
0780033	ILL 18	DRAINAGE DITCH	1.45 MI E OF ILL 26	28.00	32.60	912.80	2016
0780034	IL 26	STREAM	0.5 mi n of IL 18	45.00	32.00	1440.00	595
0780035	ILL 71	COFFEE CREEK	0.6mi E of IL 26	109.00	40.00	4360.00	1043
0780036	IL 26/FAS 2370	CLEAR CREEK	7.95 MI S OF IL 71	139.40	31.40	4377.00	1256
0780037	IL 26/FAS 2370	TRIB TO ILL RIVER	3.76 MI S OF IL 71	106.60	33.50	3571.00	1026
0780038	IL 89 (FAP 698)	LITTLE SANDY CREEK	0.05 MI N OF IL 18	126.30	33.50	4231.00	1164
0780039	IL 18	LITTLE SHADY CREEK	50FT W of IL 89	124.00	32.00	3968.00	1148
0780046	IL 26	COFFEE CREEK	1.21 MI S OF IL 71	204.00	37.80	7711.00	1708
0850501	US 24	SUGAR CR	.3 MI SW FULTON CO LN	310.00	32.00	10230.00	2170
0880020	ILL 91	CAMP RUN CREEK	6 MI N OF PRINCEVILLE	135.00	32.00	4320.00	1225
0880021	ILL 93	W FORK SPOON RIVER	7 MI W OF BRADFORD	181.40	32.00	5805.00	1550
PAGE 5 SUBTOTAL						167,965.64	89,207.60
PAGE 5 TOTAL						257,173.24	

MODEL: Default
 FILE: \\nas101.pw.state.il.us\pub\baronm.d\at\links\gov\PIWDOT\Documents\DOT_Offices\IDirect_4\Projects\ID4_68E90\CAD\Drawings\CAD\Sheets\68E90-Sheet_5.dwg

USER NAME = bourisba	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = 1/31/2020	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES			
SCALE:	SHEET 5	OF 7	SHEETS
STA.		TO STA.	

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	9
				CONTRACT NO. 68E90
		ILLINOIS	FED. AID PROJECT	

BRIDGE DECK CONCRETE SEALER (6 OF 6)							
STRUCTURE NUMBER	FACILITY CARRIED	FEATURE CROSSED	LOCATION	BRIDGE DECK LENGTH	BRIDGE DECK WIDTH	BRIDGE DECK AREA	BRIDGE PARAPET AREA
				FOOT	FOOT	SQ FT	SQ FT
0880022	ILL 93	E FORK SPOON RIVER	2.5 MI W OF BRADFORD	147.80	32.00	4730.00	1315
0880023	ILL 91	MUD RUN CR	5 MI N PRINCEVILLE	103.00	36.30	3739.00	1001
0880024	ILL 40	COOPERS CREEK	2.25 MI S BRADFORD	60.00	32.00	1920.00	700
0880025	ILL 40	SILVER CREEK	3.5 MI N OF BRADFORD	92.50	32.00	2960.00	928
0880026	ILL 40	FOX CREEK	3 MI N OF BRADFORD	88.00	32.00	2816.00	896
0880027	ILL 40	SPOON RIVER TRIB.	1.5 MI N OF BRADFORD	74.00	32.00	2368.00	798
0880028	IL 91	PRINCE RUN TRIB	4 MI N OF PRINCEVILL	70.20	31.50	2211.00	771
0880029	OSCEOLA ROAD	SPOON RIVER TRIB	0.8 MI N OF ILL 93	64.00	32.00	2048.00	728
0880032	FAP 643-IL 17	Indian Creek	0.5 mi w of Toulon	118.50	36.00	4266.00	8532
0940002	US 67	MIDDLE HEND'N CR	0.8 MI S OF ILL 135	125.90	32.00	4028.80	1161
0940016	ILL 94 & 135	HENDERSON CR	2 MI N LITTLE YORK	294.00	32.00	9408.00	2338
0940029	TR 232 (165th St)	US 34	2.5M SW OF GALESBUR	537.00	26.50	14230.50	4039
0940030	ILL 116	NEGRO CREEK	6 MI E OF ROSEVILLE	140.00	32.20	4508.00	1260
0940031	ILL 135	CEDAR CR OVERFLOW	.5 MI N LITTLE YORK	90.00	36.00	3240.00	910
0940032	ILL 135	CEDAR CREEK	N EDGE LITTLE YORK	237.00	36.00	8532.00	1939
0940033	US 34 & 67 (SB)	BNSF RR (079039A)	0.8MI N JCT US 34&67	194.00	40.00	7760.00	1638
0940034	ILL. 164	CEDAR CREEK TRIB.	.1MI W of Knox Co Ln	59.00	32.00	1888.00	693
0940035	SB US 67	PICAYUNE CREEK	4 MI N OF ROSEVILLE	86.70	38.00	3294.60	887
0940037	SB US 67	BIG NEGRO CREEK	3 MI S OF IL116	87.00	56.00	4872.00	889
0940038	NB US 67	BIG NEGRO CREEK	3 MI S ILL 116	87.00	38.00	3306.00	889
0940039	NB US 67	SWAN CREEK	4.5 MI S ROSEVILLE	88.50	38.00	3363.00	900
0940040	SB US 67	SWAN CREEK	4.5 MI S ROSEVILLE	88.50	38.00	3363.00	900
0940041	US 34	US 67	SW EDGE MONMOUTH	222.00	66.00	14652.00	1834
0940042	NB US 67	PICAYUNE CREEK	4 MI N OF ROSEVILLE	84.70	38.00	3218.60	873
0940044	ILL 116	ELLISON CREEK	4 MI W OF ROSEVILLE	84.00	37.30	3133.20	868
0940045	NB US 67	S. HENDERSON CREEK	2.8 MI S OF US 34	142.50	40.00	5700.00	1278
0940046	SB US 67	S. HENDERSON CREEK	2.8 MI S OF US 34	142.50	40.00	5700.00	1278
0940047	IL 135	JOHNS CREEK	1.5 MI S.LITTLE YORK	83.70	31.50	2636.55	866
0940048	US 67	HENDERSON CREEK	2.4 MI S OF ILL 135	198.20	31.50	6243.30	1667
0940049	US 67	TOM'S CREEK	0.1 MI W OF ILL 135	88.00	32.00	2816.00	896
0940050	OLD US 34	CEDAR CR TRIB	.5 MI E OF MONMOUTH	80.00	26.00	2080.00	840
0940051	US 67	CEDAR CR	4 MI N OF MONMOUTH	231.00	36.00	8316.00	1897
0940052	IL 164	Cedar Creek	1.51 mi NE of US 34	205.00	32.00	6560.00	1476
PAGE 6 SUBTOTAL						159,907.55	47,885.00
PAGE 6 TOTAL						207,792.55	
GRAND TOTAL						1,603,762.19	

MOBILIZATION	
LOCATION	L SUM
JOBSITE	1
TOTAL	1

TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	
LOCATION	EACH
JOBSITE	30
TOTAL	30

TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	
LOCATION	L SUM
JOBSITE	1
TOTAL	1

TRAFFIC CONTROL AND PROTECTION, STANDARD 701456	
LOCATION	L SUM
JOBSITE	1
TOTAL	1

TRAFFIC CONTROL AND PROTECTION, STANDARD 701406	
LOCATION	L SUM
JOBSITE	1
TOTAL	1

TRAFFIC CONTROL AND PROTECTION, STANDARD 701602	
LOCATION	L SUM
JOBSITE	1
TOTAL	1

MODEL: Default
 FILE: \\nrcs-pub\pubroom\dat\illinois.gov\PWIDOT\Documents\DOT_Offices\Director - Projects\IDA_68E90\CAD\Drawings\68E90-Sheet-5.dwg

USER NAME = bourisba	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = 1/31/2020	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES			
SCALE:	SHEET 7	OF 7	SHEETS
	STA.		TO STA.

VAR. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D4 BRIDGE DECK SEALING 2020	VARIOUS	11	11
			CONTRACT NO. 68E90	
		ILLINOIS	FED. AID PROJECT	