166

Letting April 24, 2020

Notice to Bidders, Specifications and Proposal



Contract No. 99642 WILLIAMSON County Section 19-00157-00-RS Route TR 219C (Crenshaw Road) Project 3FCP-937 () District 9 Construction Funds

> Plans Included Herein

Prepared by Checked by

F



NOTICE TO BIDDERS

- 1. TIME AND PLACE OF OPENING BIDS. Electronic bids are to be submitted to the electronic bidding system (iCX-Integrated Contractors Exchange). All bids must be submitted to the iCX system prior to 10:00 a.m. April 24, 2020 at which time the bids will be publicly opened from the iCX SecureVault.
- 2. DESCRIPTION OF WORK. The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

Contract No. 99642 WILLIAMSON County Section 19-00157-00-RS Project 3FCP-937 () Route TR 219C (Crenshaw Road) District 9 Construction Funds

Resurfacing Crenshaw Road from Skyline Road to Pease Road.

- **3. INSTRUCTIONS TO BIDDERS.** (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.
 - (b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS. This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the Illinois Department of Transportation

Omer Osman, Acting Secretary

INDEX FOR SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2020

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS, frequently used RECURRING SPECIAL PROVISIONS, and LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction

(Adopted 4-1-16) (Revised 1-1-20)

SUPPLEMENTAL SPECIFICATIONS

Std. Spe	ec. Sec.	Page No.
106	Control of Materials	
100	Legal Regulations and Responsibility to Public	
107	Measurement and Payment	
205	Embankment	
403	Bituminous Surface Treatment (Class A-1, A-2, A-3)	
404	Micro-Surfacing and Slurry Sealing	
405	Cape Seal	
406	Hot-Mix Asphalt Binder and Surface Course	
420	Portland Cement Concrete Pavement	
424	Portland Cement Concrete Sidewalk	
442	Pavement Patching	
502	Excavation for Structures	
503	Concrete Structures	
504	Precast Concrete Structures	
506	Cleaning and Painting New Steel Structures	
522	Retaining Walls	
542	Pipe Culverts	
586	Sand Backfill for Vaulted Abutments	42
602	Catch Basin, Manhole, Inlet, Drainage Structure, and Valve Vault Construction, Adjustment, ar	ld
	Reconstruction	44
603	Adjusting Frames and Grates of Drainage and Utility Structures	45
630	Steel Plate Beam Guardrail	46
631	Traffic Barrier Terminals	49
670	Engineer's Field Office and Laboratory	
701	Work Zone Traffic Control and Protection	
704	Temporary Concrete Barrier	
780	Pavement Striping	
781	Raised Reflective Pavement Markers	
888	Pedestrian Push-Button	
1001	Cement	
1003	Fine Aggregates	
1000	Coarse Aggregates	
1004	Metals	
1000	Portland Cement Concrete	
1020	Adjusting Rings	
1045	, , , , , , , , , , , , , , , , , , , ,	
1050	Poured Joint Sealers Pole and Tower	
1009		
	Post and Foundation	
1096	Pavement Markers	
1101	General Equipment	
1102	Hot-Mix Asphalt Equipment	
1103	Portland Cement Concrete Equipment	
1105	Pavement Marking Equipment	
1106	Work Zone Traffic Control Devices	81

RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

CHEC	K SH	<u>EET #</u>	PAGE NO.
1	Х	Additional State Requirements for Federal-Aid Construction Contracts	83
2	Х	Subletting of Contracts (Federal-Aid Contracts)	86
3	Х	EEO	
4		Specific EEO Responsibilities Non Federal-Aid Contracts	97
5		Required Provisions - State Contracts	102
6		Asbestos Bearing Pad Removal	
7		Asbestos Waterproofing Membrane and Asbestos HMA Surface Removal	109
8		Temporary Stream Crossings and In-Stream Work Pads	110
9		Construction Layout Stakes Except for Bridges	111
10		Construction Layout Stakes	114
11		Use of Geotextile Fabric for Railroad Crossing	117
12		Subsealing of Concrete Pavements	
13		Hot-Mix Asphalt Surface Correction	123
14		Pavement and Shoulder Resurfacing	125
15		Patching with Hot-Mix Asphalt Overlay Removal	
16		Polymer Concrete	
17		PVC Pipeliner	
18		Bicycle Racks	
19		Temporary Portable Bridge Traffic Signals	
20		Work Zone Public Information Signs	
21		Nighttime Inspection of Roadway Lighting	
22		English Substitution of Metric Bolts	
23		Calcium Chloride Accelerator for Portland Cement Concrete	
24		Quality Control of Concrete Mixtures at the Plant	
25		Quality Control/Quality Assurance of Concrete Mixtures	
26		Digital Terrain Modeling for Earthwork Calculations	
27		Reserved	
28		Preventive Maintenance – Bituminous Surface Treatment (A-1)	
29		Reserved	
30		Reserved	
31		Reserved	
32		Temporary Raised Pavement Markers	
33		Restoring Bridge Approach Pavements Using High-Density Foam	
34		Portland Cement Concrete Inlay or Overlay	
35		Portland Cement Concrete Partial Depth Hot-Mix Asphalt Patching	
36		Longitudinal Joint and Crack Patching	186

LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS

The following LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

CHECK SH	HEET	<u>#</u>	PAGE NO.
LRS1		Reserved	189
LRS2		Furnished Excavation	190
LRS3	Х	Work Zone Traffic Control Surveillance	191
LRS4		Flaggers in Work Zones	192
LRS5		Contract Claims	
LRS6		Bidding Requirements and Conditions for Contract Proposals	194
LRS7		Bidding Requirements and Conditions for Material Proposals	200
LRS8		Reserved	
LRS9		Bituminous Surface Treatments	207
LRS10		Reserved	208
LRS11		Employment Practices	209
LRS12		Wages of Employees on Public Works	211
LRS13		Selection of Labor	213
LRS14		Paving Brick and Concrete Paver Pavements and Sidewalks	214
LRS15		Partial Payments	217
LRS16		Protests on Local Lettings	218
LRS17		Substance Abuse Prevention Program	219
LRS18		Multigrade Cold Mix Asphalt	220

<u>TR 219C</u> Sec. 19-00157-00-RS <u>Williamson County</u> <u>Contract 99642</u>

19-00157-00-RS

INDEX OF SPECIAL PROVISIONS

Page No.

References
Description of Work
Traffic Control
Aggregate Shoulders, Ty A
Preparation of Existing Shoulders2
Pavement Joints
Bituminous Concrete Mix Design
LR107-4 Special Provision for Insurance

BDE SPECIAL PROVISIONS

The following special provisions indicated by an "X" are applicable to this contract. An * indicates a new or revised special provision for the letting.

B0009 Accessible Pedestian Signals (APS) April 1, 2003 April 1, 2012 80124 Aggregate Subgrade Improvement April 1, 2013 April 1, 2014 80173 Bituminous Materials Cost Adjustments Nov. 2, 2006 Aug. 1, 2017 80246 Bituminous Materials Cost Adjustments Nov. 2, 2006 Aug. 1, 2017 80246 Bituminous Materials Cost Adjustments Jun. 1, 2009 April 1, 2010 80241 Building Removal-Case II (Non-Friable Anbestos) Sept. 1, 1980 April 1, 2010 50491 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1980 April 1, 2010 80384 4 Compensable Delay Costs June 2, 2017 April 1, 2018 80199 Completon Date (via calendar days) Vis Absetsos) Sept. 1, 1980 April 1, 2018 80277 Concrete End Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 April 1, 2016 80387 Concrete End Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80371 Concrete Mix Design – Department Provided Jan. 1, 2017 April 1, 2016 80427 Eastomeric Bearings	<u>File</u> Name	<u>Pg.</u>	•	Special Provision Title	Effective	<u>Revised</u>
80192 Automated Flagger Assistance Device Jan. 1. 2008 80173 Bituminoux Surface Treatment with Fog Seal Jan. 1. 2020 80246 Bituminoux Surface Treatment with Fog Seal Jan. 1. 2020 80241 Bituminoux Surface Treatment with Fog Seal Jan. 1. 2020 80241 Building Removal-Case II (Non-Friable Asbestos) Sept. 1. 1990 April 1. 2010 50481 Building Removal-Case III (Non-Friable Asbestos) Sept. 1. 1990 April 1. 2010 80425 Cape Seal Jan. 1. 2020 April 1. 2010 80425 Campensable Delay Costs Jan. 1. 2020 April 1. 2010 80199 Completion Date (via calendar days) April 1. 2012 July 1. 2016 80233 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1. 2012 April 1. 2016 80261 Concrete Mix Design – Department Provided Jan. 1. 2017 Morz. 2019 80367 Concrete Mix Design – Department Provided Jan. 1. 2012 April 1. 2016 80261 Concrete Mix Design – Department Provided Jan. 1. 2017 Morz. 2019 804421 Concrete Mix Design – Department Provided </td <td></td> <td></td> <td></td> <td>Accessible Pedestrian Signals (APS)</td> <td>April 1, 2003</td> <td>April 1, 2020</td>				Accessible Pedestrian Signals (APS)	April 1, 2003	April 1, 2020
80173 Bituminous Maierials Cost Adjustments Nov. 2, 2006 Aug. 1, 2017 80246 Bituminous Surdec Treatment with Fog Seal Jan. 1, 2020 April 1, 2010 90241 Bridge Demolition Debris July 1, 2009 April 1, 2010 50481 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 50481 Building Removal-Case IV (No Asbestos) Sept. 1, 1990 April 1, 2010 60531 Building Removal-Case IV (No Asbestos) Sept. 1, 1990 April 1, 2010 80384 4 X Compensable Delay Costs June 2, 2017 April 1, 2018 80198 Completion Date (via calendar days) Plus Working Days April 1, 2018 April 1, 2018 April 1, 2018 80293 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2013 April 1, 2016 80211 Concrete Ind Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80221 Concrete Ind Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80211 Concrete Ind Sections for Pipe Culverts Jan. 1, 2010 Nov. 1, 2017 80373	80274			Aggregate Subgrade Improvement	April 1, 2012	April 1, 2016
80246 Bituminous Surface Treatment with Fog Seal July 1, 2009 80241 Bridge Demolition Debris July 1, 2009 50261 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 50491 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 50491 Building Removal-Case II (No Asbestos) Sept. 1, 1990 April 1, 2010 80384 4 X compensable Delay Costs June 2, 2017 April 1, 2018 80199 Competion Date (via calendar days) April 1, 2012 April 1, 2016 80199 Concrete Rox Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2016 80271 Concrete Ind Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80281 Concrete Mix Design – Department Provided Jan. 1, 2017 Nov. 1, 2014 80378 Disadvantaged Business Enterprise Participation Sept. 1, 2019 Mar. 1, 2019 80421 Eleatomeric Bearings Jan. 1, 2017 Jan. 1, 2017 Jan. 1, 2017 80422 Empiler's Field Office Laboratory Jan. 1, 2017 Jan. 1, 2018 Jan. 1, 2	80192			Automated Flagger Assistance Device	Jan. 1, 2008	
80241 Bridge Demolition Debris July 1, 2009 50261 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 50481 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 50481 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 80384 Compensable Delay Costs June 2, 2017 April 1, 2010 80384 Completion Date (via calendar days) Plus Working Days April 1, 2008 80283 Concrete Mix Design - Department Provided Jan. 1, 2012 July 1, 2016 80277 Concrete Mix Design - Department Provided Jan. 1, 2013 April 1, 2016 80277 Concrete Mix Design - Department Provided Jan. 1, 2014 April 1, 2016 80281 Concrete Mix Quelity - Disel Retrofit June 2, 2017 Mar. 2, 2019 80401 B Disposal Fees Nov. 1, 2014 Mar. 2, 2019 80421 Electric Service Instaliation Jan. 1, 2016 Jan. 1, 2018 80405 Electric Service Instaliation Jan. 1, 2017 Jan. 1, 2018 80441 <td< td=""><td>80173</td><td></td><td></td><td>Bituminous Materials Cost Adjustments</td><td>Nov. 2, 2006</td><td>Aug. 1, 2017</td></td<>	80173			Bituminous Materials Cost Adjustments	Nov. 2, 2006	Aug. 1, 2017
5026I Building Removal-Case I (Non-Friable and Friable Asbestos) Sept. 1, 1990 April 1, 2010 5048I Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 5049I Building Removal-Case II (Non Asbestos) Sept. 1, 1990 April 1, 2010 80425 Cape Seal Jan. 1, 2020 April 1, 2010 80384 4 Competon Date (via calendar days) April 1, 2010 80199 Completion Date (via calendar days) April 1, 2012 April 1, 2016 80293 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2016 April 1, 2016 80311 Concrete Bix Descluents Jan. 1, 2013 April 1, 2016 80261 Construction Air Quality – Diesel Retrofit June 1, 2010 Nov. 1, 2014 80376 Construction Air Quality – Diesel Retrofit June 1, 2010 Nov. 1, 2014 80405 Electric Service Installation Jan. 1, 2017 Jan. 1, 2018 80405 Electric Service Installation Jan. 1, 2019 Jan. 1, 2019 80421 X Ensomeric Basings April 1, 2010 804	80246			Bituminous Surface Treatment with Fog Seal	Jan. 1, 2020	
50481 Building Removal-Case II (Non-Friable Asbestos) Sept. 1, 1990 April 1, 2010 50491 Building Removal-Case II (Knable Asbestos) Sept. 1, 1990 April 1, 2010 80425 Cape Seal Jan. 1, 2020 April 1, 2019 80384 4 Compensable Delay Costs June 2, 2017 April 1, 2019 80199 Completion Date (via calendar days) April 1, 2018 April 1, 2018 80293 Completion Date (via calendar days) Plus Working Days April 1, 2012 April 1, 2016 80311 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2016 April 1, 2016 80277 Concrete Mix Design – Department Provided Jan. 1, 2011 April 1, 2016 80271 Construction Air Quality – Diesel Retrofit June 1, 2010 Mar. 2, 2019 80281 Construction Air Quality – Diesel Retrofit June 1, 2010 Mar. 2, 2019 80402 18 Disposal Fees Nov. 1, 2017 Mar. 2, 2019 80405 Elestomeric Bearings Jan. 1, 2010 Mar. 2, 2019 80421 Elestomeric Bearings Jan. 1, 2020 Mar. 2, 2019 80423 Engineeris Field Office Laboratory <td>80241</td> <td></td> <td></td> <td>Bridge Demolition Debris</td> <td>July 1, 2009</td> <td></td>	80241			Bridge Demolition Debris	July 1, 2009	
50491 Building Removal-Case III (Friable Asbestos) Sept. 1, 1990 April 1, 2010 80531 Building Removal-Case IV (No Asbestos) Sept. 1, 1990 April 1, 2010 80384 4 Competion Date (via calendar days) April 1, 2008 80199 Completion Date (via calendar days) April 1, 2008 80199 Completion Date (via calendar days) April 1, 2012 80111 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2016 80211 Concrete End Sections for Pipe Culverts Jan. 1, 2011 April 1, 2016 80221 Concrete Mix Design – Department Provided Jan. 1, 2010 Nov. 1, 2014 80311 Concrete Mix Design – Department Provided Jan. 1, 2010 Nov. 1, 2016 80221 Construction Air Quality – Diseal Retrofit June 1, 2010 Nov. 1, 2014 80328 Disdovantaged Business Enterprise Participation Sept. 1, 2000 Mar. 2, 2019 80402 18 Disposal Fees Nov. 1, 2014 Jan. 1, 2017 80405 Elastomeric Bearings Jan. 1, 2019 Jan. 1, 2018 80423 Engineer's Field Office Laboratory Jan. 1, 2020 Aug. 1, 2017 <					Sept. 1, 1990	
50531 Building Removal-Case IV (No Asbestos) Sept. 1, 1990 April 1, 2010 80425 Cape Seal June 2, 2017 April 1, 2019 80198 Completion Date (via calendar days) April 1, 2008 April 1, 2008 80293 Completion Date (via calendar days) April 1, 2008 April 1, 2012 80199 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2016 80293 Concrete Ind Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80211 Concrete Mix Design – Department Provided Jan. 1, 2013 April 1, 2016 80261 Contrast Preformed Plastic Pavement Marking Nov. 1, 2011 Nov. 1, 2017 80277 Contrast Preformed Plastic Pavement Marking Nov. 1, 2010 Mar. 2, 2019 80261 Construction Air Quality – Diesel Retrofit Jan. 1, 2018 Mov. 1, 2018 80378 Diseoval Fees Jan. 1, 2018 Mov. 1, 2018 80405 Elastomeric Bearings Jan. 1, 2019 Mar. 1, 2019 80415 Diseoval Fees Jan. 1, 2019 Mar. 1, 2019 80421 Equipment Parking and Storage Nov. 1, 2017 Jan. 1, 2018				· · · · · · · · · · · · · · · · · · ·	•	
80425Cape SealJan. 1. 2020803844XCompensable Delay CostsJune 2. 2017April 1, 201980199Completion Date (via calendar days)Pus Working DaysApril 1, 200880293Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤April 1, 2012July 1, 201680311Concrete End Sections for Pipe CulvertsJan. 1, 2013April 1, 201680277Concrete Row Culverts with Skews > 30 Degrees and Design Fills ≤April 1, 2013April 1, 201680261Concrete Mix Design – Department ProvidedJan. 1, 2013April 1, 201680261Contrast Preformed Plastic Pavement MarkingNov. 1, 2017Nov. 1, 201480327Contrast Preformed Plastic Pavement MarkingNov. 1, 2010Nov. 1, 201480425Bisadvantaged Business Enterprise ParticipationSept. 1, 2000Mar. 2, 201980405Electric Service InstallationJan. 1, 2017Jan. 1, 201880425Engineer's Field Office LaboratoryJan. 1, 202080481Z0XEngineer's Field Office LaboratoryJan. 1, 201980420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201780421Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980422Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 2014Nov. 1, 201780422Hot-Mix Asphalt – Day for PerformanceApril 1, 2018Nov. 1, 2019 <td></td> <td></td> <td></td> <td></td> <td>•</td> <td>•</td>					•	•
80384 4 X Compensable Delay Costs June 2. 2017 April 1, 2019 80198 Completion Date (via calendar days) April 1, 2008 April 1, 2012 July 1, 2016 80293 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2012 July 1, 2016 80311 Concrete End Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80381 Construction Air Quality – Diesel Retrofit Jan. 1, 2012 April 1, 2016 80287 Construction Air Quality – Diesel Retrofit June 1, 2017 Nov. 1, 2014 80387 Construction Air Quality – Diesel Retrofit June 1, 2017 Mar. 2, 2019 80402 18 X Disposal Fees Nov. 1, 2018 80402 18 Disposal Fees Jan. 1, 2019 Mar. 1, 2020 80415 20 X Engineer's Field Office Laboratory Jan. 1, 2020 80417 Geotexhice Asphalts Aug. 1, 2017 Geotexhice Asphalts 80420 Equipment Parking and Storage Nov. 1, 2019 Nov. 1, 2019 80421 Equipment Parking and Storage Nov. 1, 2019 Nov. 1, 2019 80422 High Te					-	April 1, 2010
80198 80199Completion Date (via calendar days) Completion Date (via calendar days) Plus Working Days Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ 						
80199 Completion Date (via calendar days) Plus Working Days April 1, 2008 80293 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2012 July 1, 2016 80311 Concrete End Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80261 Concrete Mix Design – Department Provided Jan. 1, 2010 Nov. 1, 2017 80261 Construction Air Quality – Diesel Retrofit June 1, 2010 Nov. 1, 2014 80387 Disadvantaged Business Enterprise Participation Sept. 1, 2000 Mar. 2, 2019 80402 18 Disposal Fees Nov. 1, 2017 Jan. 1, 2018 80405 Elastomeric Bearings Jan. 1, 2019 Jan. 1, 2020 80412 Electric Service Installation Jan. 1, 2020 Engineer's Field Office Laboratory Jan. 1, 2020 80423 Engineer's Field Office Laboratory Jan. 1, 2020 Aug. 1, 2017 80424 Equipment Parking and Storage Nov. 1, 2017 80425 X Equipment Parking and Storage Nov. 1, 2017 80426 Grooving for Recessed Pavement Markings Nov. 1, 2017 Nov. 1, 2017 80427 Geotextife Retaining Walls Nov. 1, 201		4	Х			April 1, 2019
80293 Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ April 1, 2012 July 1, 2016 80311 Concrete End Sections for Pipe Culverts Jan. 1, 2013 April 1, 2016 80277 Concrete End Sections for Pipe Culverts Jan. 1, 2012 April 1, 2016 80283 Construction Air Quality – Diesel Retrofit June 1, 2010 Nov. 1, 2014 80387 Contrast Preformed Plastic Pavement Marking Nov. 1, 2017 War. 2, 2019 80405 Disadvantaged Business Enterprise Participation Sept. 1, 2000 Mar. 2, 2019 80405 Elastomeric Bearings Jan. 1, 2017 Jan. 1, 2018 80405 Elastomeric Bearings Jan. 1, 2019 Jan. 1, 2019 80421 Eletoric Service Installation Jan. 1, 2019 Engineer's Field Office Laboratory Jan. 1, 2019 80423 X Equipment Parking and Storage Nov. 1, 2019 Aug. 1, 2017 80420 Geotexhical Fabric for Pipe Underdrains and French Drains Nov. 1, 2019 Nov. 1, 2019 80446 Grooving for Recessed Pavement Markings Nov. 1, 2019 Nov. 1, 2019 Nov. 1, 2019 80446 <td></td> <td></td> <td></td> <td></td> <td>•</td> <td></td>					•	
South5 FeetJan. 1, 2013April 1, 201680271Concrete End Sections for Pipe CulvertsJan. 1, 2012April 1, 201680261Construction Air Quality – Disel RetrofitJune 1, 2010Nov. 1, 201180387Contrast Preformed Plastic Pavement MarkingNov. 1, 2017802098XDisposal FeesNov. 1, 20188040218XDisposal FeesNov. 1, 20188040218XDisposal FeesNov. 1, 201980405Elastomeric BearingsJan. 1, 2019Jan. 1, 201980421Electric Service InstallationJan. 1, 202080441520XEmulsified AsphaltsAug. 1, 201980423Engineer's Field Office LaboratoryJan. 1, 202080445Electrnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201780229Fuel Cost AdjustmentApril 7, 2019Aug. 1, 201780420Geotextile Retaining WallsNov. 1, 2019Nov. 1, 201780421High Tension Cable Median Barrier ReflectorsJan. 1, 2018Nov. 1, 201980434Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980347Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2016July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2019Jan. 1,					•	
80277Concrete Mix Design – Department ProvidedJan. 1, 2012Ápril 1, 201680261Construction Air Quality – Disel RetroftJune 1, 2010Nov. 1, 201480387Contrast Preformed Plastic Pavement MarkingNov. 1, 2017800298XDisadvantaged Business Enterprise ParticipationSept. 1, 20008040218XDisposal FeesNov. 1, 201880378Dowel Bar InserterJan. 1, 2019Jan. 1, 201980405Elastomeric BearingsJan. 1, 20198041520XEmulsified Asphalts80423Engineer's Field Office LaboratoryJan. 1, 20208038823Equipment Parking and StorageNov. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201780422Hot-Mix Asphalt – Binder and Surface CourseJan. 1, 201880384Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980383Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201880383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201880383Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880383Matholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880383Matholes, Valve Vaults, and Flat Slab To	80293				April 1, 2012	July 1, 2016
80261Construction Air Quality – Diesel RetrofitJune 1, 2010Nov. 1, 201480387Contrast Preformed Plastic Pavement MarkingNov. 1, 2017800298Disadvantaged Business Enterprise ParticipationSept. 1, 20008040218Disposal FeesNov. 1, 201780378Dowel Bar InserterJan. 1, 201780421Elastomeric BearingsJan. 1, 201780421Electric Service InstallationJan. 1, 201980423Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780304Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 2012Nov. 1, 20178041624XHot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 201980383Hot-Mix Asphalt – Mixture Design Verification and ProductionJan. 1, 2019Jan. 2, 202080347Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 2014July 2, 201980383Matholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980383Matholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980383Matholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980384Material T	80311			Concrete End Sections for Pipe Culverts	Jan. 1, 2013	April 1, 2016
80387 80029Contrast Preformed Plastic Pavement Marking Disposal FeesNov. 1, 2017 Sept. 1, 2000Mar. 2, 201980402 80378Disposal Fees Dowel Bar InserterJan. 1, 2017 Jan. 1, 2017Jan. 1, 201880405Elastomeric Bearings Elastomeric BearingsJan. 1, 2017 Jan. 1, 2018Jan. 1, 201980421Elastomeric Bearings Bod415Jan. 1, 201980423Engineer's Field Office Laboratory Fuel Cost Adjustment Geotechnical Fabric for Pipe Underdrains and French Drains Grooving for Recessed Pavement Markings Nov. 1, 2019Aug. 1, 201780424Grooving for Recessed Pavement Markings Mov. 1, 2019Nov. 1, 201980422Grooving for Recessed Pavement Markings Mov. 1, 2019Nov. 1, 201980342Grooving for Recessed Pavement Markings Mov. 1, 2019Nov. 1, 201980342Hot-Mix Asphalt - Binder and Surface Course (Modified for I-FIT Data Collection)Jan. 1, 201980347Hot-Mix Asphalt - Longitudinal Joint Sealant Within Limits - Jobsite Sampling Within Limits - Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt - Quality Control for Performance Material Transfer DeviceApril 1, 2017July 2, 201980393Manholes, Valve Vaults, and Flat Slab Tops Material Transfer DeviceJan. 1, 2018Mar. 1, 201980393Material Transfer Device Material Transfer DeviceApril 1, 2017July 2, 201980393Material Transfer Device Material Transfer DeviceApril 1, 2017July 2, 201980393Material Transfer Device Material Transfer Dev	80277			Concrete Mix Design – Department Provided	Jan. 1, 2012	April 1, 2016
800298XDisadvantaged Business Enterprise ParticipationSept. 1, 2000Mar. 2, 20198040218XDisposal FeesNov. 1, 201880378Dowel Bar InserterJan. 1, 2017Jan. 1, 201880405Elastomeric BearingsJan. 1, 201980421Electric Service InstallationJan. 1, 202080423Enuisified AsphaltsAug. 1, 20108038823XEquipment Parking and StorageNov. 1, 201780420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980421Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980421High Tension Cable Median Barrier ReflectorsJan. 1, 202080304Grooving for Recessed Pavement MarkingsNov. 1, 201180304Vort.Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Dingtrudinal Joint SealantAug. 1, 201880347Hot-Mix Asphalt – Quality Control for Performance Using PercentNov. 1, 201480383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201980383Maholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880384Material Transfer DeviceJune 15, 199980383Maholes, Valve Vaults, and Flat Slab TopsJan. 1, 201980384Material Transfer DeviceJune 15, 1999<	80261			Construction Air Quality – Diesel Retrofit	June 1, 2010	Nov. 1, 2014
8040218XDisposal FeesNov. 1, 201880378Dowel Bar InserterJan. 1, 2017Jan. 1, 201780405Elastomeric BearingsJan. 1, 201980421Electric Service InstallationJan. 1, 20208041520XEmulsified AsphaltsAug. 1, 201980382Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780417Geotextile Retaining WallsNov. 1, 2019Aug. 1, 201780420Grooving for Recessed Pavement MarkingsNov. 1, 2019Nov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 2012Nov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 2019Nov. 1, 201980406Hot-Mix Asphalt – Dingitudinal Joint SealantAug. 1, 2018Nov. 1, 201980383Hot-Mix Asphalt – Dorgitudinal Joint SealantAug. 1, 2014Nov. 1, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Marcholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980383Marcholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980383Marcholes, Valve Vaults, and Flat Slab TopsJan. 1, 2020Mar. 1, 201980424Micro-Surfacing and Slurry Sea	80387			Contrast Preformed Plastic Pavement Marking	Nov. 1, 2017	
80378Dowel Bar InserterJan. 1, 2017Jan. 1, 201880405Elastomeric BearingsJan. 1, 201980421Electric Service InstallationJan. 1, 20208041520XEmulsified AsphaltsAug. 1, 201980423Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201280304Geotextile Retaining WallsNov. 1, 201280422High Tension Cable Median Barrier ReflectorsJan. 1, 201880406Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980377Hot-Mix Asphalt – Mixture Design Verification and ProductionJan. 1, 201480383Hot-Mix Asphalt – Longitudinal Joint SealantNov. 1, 201780383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201780393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880347Matholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880383Mot-Mix Asphalt – Quality Control for PerformanceApril 1, 201780345Material Transfer DeviceJune 15, 199980345Material Transfer DeviceJan. 1, 201880448Mechanically Stabilized Earth Retaining WallsNov. 1, 201480424Micro-Surfacing and Slury Seal	80029	8	Х		Sept. 1, 2000	Mar. 2, 2019
80405Elastomeric BearingsJan. 1, 201980421Electric Service InstallationJan. 1, 20208041520XEmulsified AsphaltsAug. 1, 201980423Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980304Geotextile Retaining WallsNov. 1, 2012Nov. 1, 20178041624High Tension Cable Median Barrier ReflectorsJan. 1, 202080388Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2017July 2, 201980347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980345Material Transfer DeviceJune 15, 1999Aug. 1, 201480418Mechanically Stabilized Earth Retaining WallsNov. 1, 2019Aug. 1, 20148042831XMobilizationApril 1, 20208042831XMobilizationApril 1, 20208042831XMobilizationApril 1, 202080428AlXMobilizationApril		18	Х	Disposal Fees	Nov. 1, 2018	
80421Electric Service InstallationJan. 1, 20208041520XEmulsified AsphaltsAug. 1, 201980423Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980304Goroving for Recessed Pavement MarkingsNov. 1, 201980420Geotextile Retaining WallsNov. 1, 201780422High Tension Cable Median Barrier ReflectorsJan. 1, 202080446XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980393Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 201880406Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 201480411Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 201480383Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 201480383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201780393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201980414Mechanically Stabilized Earth Retaining WallsNov. 1, 201980415Moti-Stareg DeviceJune 15, 199980416Metrial Transfer DeviceJune 15, 199980417Metrial Transfer DeviceJune 15, 199980418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980383MobilizationApril 1, 2019<						Jan. 1, 2018
8041520XEmulsified AsphaltsAug. 1, 201980423Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980421Geotechnical Fabric for Dipe Underdrains and French DrainsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 20198041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2014Nov. 1, 201980307Hot-Mix Asphalt – Day for Performance Using PercentNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980393Material Transfer DeviceJune 15, 1999Aug. 1, 201480424Micro-Surfacing and Slurry SealingJan. 1, 2020*80425Moisture Cured Urethane Paint SystemNov. 1, 20068042631XMobilizationApril 1, 201080425Moisture Cured Urethane Paint SystemNov. 1, 2014April 1, 201080426Moisture Cured Urethane Paint System </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
80423Engineer's Field Office LaboratoryJan. 1, 20208038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotextile Retaining WallsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 20128041624High Tension Cable Median Barrier ReflectorsJan. 1, 20208041624K Hot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 201780347Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 201480383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201780383Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880345Material Transfer DeviceJune 15, 199980345Material Transfer DeviceJune 15, 199980446Mechanically Stabilized Earth Retaining WallsNov. 1, 201480447Micro-Surfacing and Slurry SealingJan. 1, 202080383Maholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880445Material Transfer DeviceJune 15, 19998045Material Transfer DeviceJan. 1, 20108045MobilizationApril 1, 20208045MobilizationApril 1, 20208045MobilizationApril 1, 20208045Mostruction Warning Luminaires, LEDApril				4		
8038823XEquipment Parking and StorageNov. 1, 201780229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotextile Retaining WallsNov. 1, 201980422Grooving for Recessed Pavement MarkingsNov. 1, 20128041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 201880347Hot-Mix Asphalt – Nixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 201980383Hot-Mix Asphalt – Quality Control for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 201780383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201780393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880348Mechanically Stabilized Earth Retaining WallsNov. 1, 201980383Motoilus Stabilized Earth Retaining WallsNov. 1, 201980344Mitoro-Surfacing and Slurry SealingJan. 1, 2020*80424Micro-Surfacing and Slurry SealingJan. 1, 2020*8042831X80424Moisture Cured Urethane Paint SystemNov. 1, 201480425Aug. 1, 2019Aug. 1, 201680442Moisture Cured Urethane Paint SystemNov. 1, 20148045Aug. 1, 2019Aug. 1, 20198045Moisture Cured Urethane Paint SystemNov. 1, 201480418		20	Х		-	
80229Fuel Cost AdjustmentApril 1, 2009Aug. 1, 201780417Geotechnical Fabric for Pipe Underdrains and French DrainsNov. 1, 201980420Geotextile Retaining WallsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 201280422High Tension Cable Median Barrier ReflectorsJan. 1, 20208041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 201980398Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 202080347Hot-Mix Asphalt – Quality Control for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980345Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 20198045Material Transfer DeviceJune 15, 1999Aug. 1, 201480424Micro-Surfacing and Slurry SealingJan. 1, 2020*8042831XMobilizationApril 1, 2020*8042831XMobilizationApril 1, 201980424Misture Cured Urethane Paint SystemNov. 1, 2014Jan. 1, 201080450Mosture Cured Urethane Paint SystemNov. 1, 2019Jan. 1, 201080418Mechanically Stabilized Earth Retaining WallsNov. 1, 2014April 1, 201080451M						
80417Geotechnical Fabric for Pipe Underdrains and French Drains Bo420Nov. 1, 201980420Geotextile Retaining WallsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 201280422High Tension Cable Median Barrier ReflectorsJan. 1, 20208041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 2019*80406Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 2020*80383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 20198045Material Transfer DeviceJune 15, 1999Aug. 1, 201480424Micro-Surfacing and Slurry SealingJan. 1, 2020*80424MobilizationApril 1, 2020*80425Mosture Cured Urethane Paint SystemNov. 1, 20068045Mosture Cured Urethane Paint SystemNov. 1, 20198045Mosture Cured Urethane Paint SystemNov. 1, 20148045April 1, 2019April 1, 2016		23	Х			
80420Geotextile Retaining WallsNov. 1, 201980304Grooving for Recessed Pavement MarkingsNov. 1, 201280422High Tension Cable Median Barrier ReflectorsJan. 1, 20208041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 2019*80406Hot-Mix Asphalt – Mixture Design Verification and ProductionJan. 1, 2019Jan. 2, 2020*80406Hot-Mix Asphalt – Pay for Performance Using PercentNov. 1, 2014July 2, 2019*80383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980383Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980441Mechanically Stabilized Earth Retaining WallsNov. 1, 2019Aug. 1, 201480424Micro-Surfacing and Slurry SealingJan. 1, 2020Jan. 1, 2020*8042831XMobilizationApril 1, 2020*8042831XMobilizationApril 1, 2019*80429Pavement Marking Blackout TapeNov. 1, 2014April 1, 2016*80371Pavement Marking RemovalJuly 1, 2016Xuly 1, 2016					•	Aug. 1, 2017
80304Grooving for Recessed Pavement MarkingsNov. 1, 2012Nov. 1, 201780422High Tension Cable Median Barrier ReflectorsJan. 1, 20208041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 2019*80406Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 2020*80347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980418Mechanically Stabilized Earth Retaining WallsNov. 1, 2014Mar. 1, 201480424Micro-Surfacing and Slurry SealingJan. 1, 2020Mox. 1, 2010*8042831XMobilizationApril 1, 202080412Obstruction Warning Luminaires, LEDAug. 1, 2019Aug. 1, 201080349Pavement Marking Blackout TapeNov. 1, 2014April 1, 2016						
80422 80416High Tension Cable Median Barrier ReflectorsJan. 1, 20208041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 2019*80406Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 2020*80347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980418Mechanically Stabilized Earth Retaining WallsNov. 1, 2019Aug. 1, 201480424Micro-Surfacing and Slurry SealingJan. 1, 2020Aug. 1, 2010*8042831MobilizationApril 1, 202080165Moisture Cured Urethane Paint SystemNov. 1, 2014April 1, 201780349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680349Pavement Marking RemovalJuly 1, 2016April 1, 2016						
8041624XHot-Mix Asphalt – Binder and Surface CourseJuly 2, 2019Nov. 1, 201980398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 2019*80406Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 2020*80347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980411Luminaires, LED Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018 April 1, 2019Mar. 1, 20198045Material Transfer Device Micro-Surfacing and Slurry SealingJan. 1, 2020Aug. 1, 2014*8042831XMobilization MobilizationApril 1, 2020Jan. 1, 2010*80412 80412Obstruction Warning Luminaires, LED Mostrue Cured Urethane Paint System 80349Nov. 1, 2014 April 1, 2019Jan. 1, 2010*80349 80349Pavement Marking Blackout Tape Pavement Marking RemovalApril 1, 2014 April 1, 2016April 1, 2016						Nov. 1, 2017
80398Hot-Mix Asphalt – Longitudinal Joint SealantAug. 1, 2018Nov. 1, 2019*80406Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 202080347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980411Luminaires, LED Material Transfer DeviceApril 1, 2019Mar. 1, 20198045Material Transfer DeviceJune 15, 1999Aug. 1, 201480418Mechanically Stabilized Earth Retaining WallsNov. 1, 2019April 1, 2020*8042831XMobilizationApril 1, 2020*8042831XMobilizationApril 1, 201980349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016April 1, 2016						
*80406Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Data Collection)Jan. 1, 2019Jan. 2, 202080347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980411Luminaires, LED Material Transfer DeviceApril 1, 2017July 2, 20198045Material Transfer DeviceJan. 1, 2018Mar. 1, 201980418Mechanically Stabilized Earth Retaining WallsNov. 1, 2019Aug. 1, 20148042831XMobilizationApril 1, 202080165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201780371Pavement Marking RemovalJuly 1, 2016July 1, 2016		24	Х	- · ·		
Kine and Construction(Modified for I-FIT Data Collection)80347Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite SamplingNov. 1, 2014July 2, 201980383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017 April 1, 2019July 2, 201980411Luminaires, LED Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018 June 15, 1999Mar. 1, 201980455Material Transfer Device Micro-Surfacing and Slurry SealingJune 15, 1999 Jan. 1, 2020Aug. 1, 2014*8042831X MobilizationMobilization April 1, 2020Jan. 1, 202080165Moisture Cured Urethane Paint System 80349 80349Nov. 1, 2019 Pavement Marking Blackout TapeNov. 1, 2014 April 1, 2016April 1, 2016						
Within Limits – Jobsite Sampling80383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 201780411Luminaires, LEDApril 1, 201980393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880045Material Transfer DeviceJune 15, 199980418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980424Micro-Surfacing and Slurry SealingJan. 1, 2020*80455MobilizationApril 1, 2020*80165Moisture Cured Urethane Paint SystemNov. 1, 200680165Moisture Cured Urethane Paint SystemNov. 1, 201980349Pavement Marking Blackout TapeNov. 1, 201480371Pavement Marking RemovalJuly 1, 2016	* 80406				Jan. 1, 2019	Jan. 2, 2020
80383Hot-Mix Asphalt – Quality Control for PerformanceApril 1, 2017July 2, 201980411Luminaires, LEDApril 1, 201980393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880045Material Transfer DeviceJune 15, 199980418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980424Micro-Surfacing and Slurry SealingJan. 1, 2020*8042831XMobilization80165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080412Obstruction Warning Luminaires, LEDAug. 1, 2019Jan. 1, 201080349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016April 1, 2016	80347				Nov. 1, 2014	July 2, 2019
80411Luminaires, LEDApril 1, 201980393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 201880045Material Transfer DeviceJune 15, 199980418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980424Micro-Surfacing and Slurry SealingJan. 1, 2020*8042831X80165Moisture Cured Urethane Paint SystemNov. 1, 200680165Moisture Cured Urethane Paint SystemNov. 1, 201980349Pavement Marking Blackout TapeNov. 1, 201480371Pavement Marking RemovalJuly 1, 2016	80383				April 1, 2017	July 2, 2019
80393Manholes, Valve Vaults, and Flat Slab TopsJan. 1, 2018Mar. 1, 201980045Material Transfer DeviceJune 15, 1999Aug. 1, 201480418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980424Micro-Surfacing and Slurry SealingJan. 1, 2020*8042831XMobilization80165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080412Obstruction Warning Luminaires, LEDAug. 1, 2019Jan. 1, 201080349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016April 1, 2016	80411				•	
80045Material Transfer DeviceJune 15, 1999Aug. 1, 201480418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980424Micro-Surfacing and Slurry SealingJan. 1, 2020* 8042831XMobilization80165Moisture Cured Urethane Paint SystemNov. 1, 200680412Obstruction Warning Luminaires, LEDAug. 1, 201980349Pavement Marking Blackout TapeNov. 1, 201480371Pavement Marking RemovalJuly 1, 2016	80393				•	Mar. 1, 2019
80418Mechanically Stabilized Earth Retaining WallsNov. 1, 201980424Micro-Surfacing and Slurry SealingJan. 1, 2020* 8042831XMobilizationApril 1, 202080165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080412Obstruction Warning Luminaires, LEDAug. 1, 2019Jan. 1, 201080349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016	80045				June 15, 1999	Aug. 1, 2014
80424Micro-Surfacing and Slurry SealingJan. 1, 2020*8042831XMobilizationApril 1, 202080165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080412Obstruction Warning Luminaires, LEDAug. 1, 2019April 1, 201680349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016	80418			Mechanically Stabilized Earth Retaining Walls		U
*8042831XMobilizationApril 1, 202080165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080412Obstruction Warning Luminaires, LEDAug. 1, 2019Aug. 1, 201980349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016April 1, 2016	80424					
80165Moisture Cured Urethane Paint SystemNov. 1, 2006Jan. 1, 201080412Obstruction Warning Luminaires, LEDAug. 1, 201980349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016	* 80428	31	X			
80412Obstruction Warning Luminaires, LEDAug. 1, 201980349Pavement Marking Blackout TapeNov. 1, 2014April 1, 201680371Pavement Marking RemovalJuly 1, 2016	80165			Moisture Cured Urethane Paint System		Jan. 1, 2010
80371 Pavement Marking Removal July 1, 2016	80412			Obstruction Warning Luminaires, LED	Aug. 1, 2019	
80371 Pavement Marking Removal July 1, 2016	80349			Pavement Marking Blackout Tape	Nov. 1, 2014	April 1, 2016
80389 Portland Cement Concrete Nov. 1, 2017	80371				July 1, 2016	
	80389			Portland Cement Concrete	Nov. 1, 2017	

	<u>File</u> Name	<u>Pg.</u>		Special Provision Title	Effective	<u>Revised</u>
	80359			Portland Cement Concrete Bridge Deck Curing	April 1, 2015	Nov. 1, 2019
	80300			Preformed Plastic Pavement Marking Type D - Inlaid	April 1, 2012	April 1, 2016
	34261			Railroad Protective Liability Insurance	Dec. 1, 1986	Jan. 1, 2006
	80157			Railroad Protective Liability Insurance (5 and 10)	Jan. 1, 2006	
*	80306	32	Х	Reclaimed Asphalt Pavement (RAP) and Reclaimed Asphalt Shingles (RAS)	Nov. 1, 2012	Jan. 2, 2020
	80407	42	Х	Removal and Disposal of Regulated Substances	Jan. 1, 2019	Jan. 1, 2020
*	80419			Silt Fence, Inlet Filters, Ground Stabilization and Riprap Filter Fabric	Nov. 1, 2019	April 1, 2020
	80395			Sloped Metal End Section for Pipe Culverts	Jan. 1, 2018	
	80340			Speed Display Trailer	April 2, 2014	Jan. 1, 2017
	80127			Steel Cost Adjustment	April 2, 2014	Aug. 1, 2017
	80408			Steel Plate Beam Guardrail Manufacturing	Jan. 1, 2019	
	80413			Structural Timber	Aug. 1, 2019	
	80397	53	Х	Subcontractor and DBE Payment Reporting	April 2, 2018	
	80391	54	Х	Subcontractor Mobilization Payments	Nov. 2, 2017	April 1, 2019
	80317			Surface Testing of Hot-Mix Asphalt Overlays	Jan. 1, 2013	Aug. 1, 2019
	80298			Temporary Pavement Marking	April 1, 2012	April 1, 2017
	80403			Traffic Barrier Terminal, Type 1 Special	Nov. 1, 2018	
	80409	55	Х	Traffic Control Devices – Cones	Jan. 1, 2019	
	80410			Traffic Spotters	Jan. 1, 2019	
	20338			Training Special Provisions	Oct. 15, 1975	
	80318			Traversable Pipe Grate for Concrete End Sections	Jan. 1, 2013	Jan. 1, 2018
*	80429			Ultra-Thin Bonded Wearing Course	April 1, 2020	
	80288			Warm Mix Asphalt	Jan. 1, 2012	April 1, 2016
	80302	56	Х	Weekly DBE Trucking Reports	June 2, 2012	April 2, 2015
*	80414			Wood Fence Sight Screen	Aug. 1, 2019	April 1, 2020
*	80427	57	Х	Work Zone Traffic Control Devices	Mar. 2, 2020	
	80071	59	Х	Working Days	Jan. 1, 2002	

The following special provisions are in the 2020 Supplemental Specifications and Recurring Special Provisions.

<u>File</u> Name	Special Provision Title	New Location(s)	Effective	Revised
80404	Coarse Aggregate Quality for Micro-Surfacing and Cape Seals	Article 1004.01(b)	Jan. 1, 2019	
80392	Lights on Barricades	Articles 701.16, 701.17(c)(2) & 603.07	Jan. 1, 2018	
80336	Longitudinal Joint and Crack Patching	Check Sheet #36	April 1, 2014	April 1, 2016
80400	Mast Arm Assembly and Pole	Article 1077.03(b)	Aug. 1, 2018	•
80394 80390	Metal Flared End Section for Pipe Culverts Payments to Subcontractors	Articles 542.07(c) and 542.11 Article 109.11	Jan. 1, 2018 Nov. 2, 2017	April 1, 2018
00000			1101.2,2017	

The following special provisions have been deleted from use.

<u>File</u>	Special Provision Title	Effective	<u>Revised</u>
<u>Name</u> 80328	Progress Payments	Nov. 2, 2013	

<u>TR 219C</u> Sec. 19-00157-00-RS Williamson County Contract 9

STATE OF ILLINOIS SPECIAL PROVISIONS

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction", adopted <u>April 1, 2016</u>, the latest edition of the "Illinois Manual on Uniform Traffic Control Devices for Streets and Highways", and the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids, and the "Supplemental Specifications and Recurring Special Provisions" indicated on the Check Sheet included herein which apply to and govern the proposed improvement of TR 219C, Project <u>3FCP(937)</u>, Section <u>19</u>-00157-00-RS in Williamson County and in case of conflict with any part or parts of said specifications, the said Special Provisions shall take precedence and shall govern.

DESCRIPTION OF WORK:

This work includes the hot-mix asphalt overlay, hot-mix asphalt shoulder, and aggregate shoulder wedge on 1.92 Miles of TR 219C (Crenshaw Road).

TRAFFIC CONTROL:

The contractor will be required to maintain one-way traffic during the construction of the proposed improvement. Traffic Control shall be in accordance with the applicable section of the "Standard Specifications", the applicable guidelines in the Illinois Manual on Uniform Traffic Control Devices, these Special Provisions and Highway Standards contained herein. This road is low volume and exempt from requirements regarding temporary no-passing zone pavement markings.

At the preconstruction meeting, the contractor shall furnish the name of the individual in his direct employ who is to be responsible for the installation and maintenance of the traffic control for this project. If the actual installation and maintenance are to be accomplished by a subcontractor, consent shall be requested of the Engineer at the time of the preconstruction meeting in accordance with Article 108.01 of the "Standard Specifications". This shall not relieve the contractor of the foregoing requirement for a responsible individual in his direct employ. The Department will provide the contractor the name of its representative who will be responsible for the administration of the Traffic Control Plan.

Special attention is called to Articles 107.09 and 107.14 of the Standard Specifications and the following Highway Standards: 701001, 701006, 701011, 701301, 701306, and 701311.

Side-road flaggers will be required at all side roads that fall within the lane closure area as shown on Highway Standard 701306. No additional compensation will be allowed to comply with this requirement.

During hours of darkness, lane closures will not be permitted and the contractor will be required to remove all equipment and materials from the roadway.

The cost for the materials, labor, and equipment necessary for Traffic Control in accordance with the above mentioned standards at each location (including side-road flaggers) will be paid for at the contract unit price bid per lump sum for TRAFFIC CONTROL AND PROTECTION, STANDARD 701306.

<u>TR 219C</u> Sec. 19-00157-00-RS Williamson County <u>Contract 9</u>

AGGREGATE SHOULDERS, TY A:

In addition to building the aggregate shoulder wedge as shown on the typical section, 50 tons of the proposed Aggregate Shoulders, Ty A quantity shall be used for the addition of base material at the entrances and mailbox turnouts. This work shall be done in accordance with the applicable portions of Section 351 of the Standard Specifications with the following exceptions:

Art. 351.06 - The base course thickness at driveways and mailbox turnouts shall be as directed by the Engineer in order to provide a smooth transition from the new road surface to the existing driveway or mailbox turnout.

This work will be paid for at the contract unit price bid per ton for AGGREGATE SHOULDERS, TY A and no additional compensation will be allowed for the above requirements.

PREPARATION OF EXISTING SHOULDERS:

This item shall consist of the preparation of shoulders prior to placement of the hot-mix asphalt shoulder.

Excess vegetation, cinders, etc, shall be removed by light blading, close mowing, sweeping, or other means approved by the Engineer for a minimum distance of two (2) feet from the edge of pavement. Excess piles of this material shall be spread or removed as directed by the engineer.

This work will not be paid for separately but shall be included in the contract unit price per ton for Hot Mix Asphalt Shoulders.

PAVEMENT JOINTS:

The mainline pavement joint at Station 0+00 shall be constructed as a butt joint. The existing pavement surface shall be removed to a depth of 1 1/2 inches for 30 feet at the joint by means of an approved, self-propelled pavement milling machine. This work shall be done as directed by the Engineer to provide a smooth transition from the proposed pavement surface to the existing pavement. The pavement joint at Station 101+38 shall be a 50 foot taper joint as directed by the Engineer.

This work shall be paid for at the contract unit price bid per square yard for HOT MIX ASPHALT SURFACE REMOVAL, BUTT JOINT.

BITUMINOUS CONCRETE MIXTURE REQUIREMENTS:

Location: <u>Hot-Mix Asphalt Surface Course</u> Mixture Use: <u>Hot Mix Asphalt</u> AC/PG: <u>PG64-22</u> RAP%(Max.): <u>10</u> Design Air Voids: <u>4.0%</u>, 70 Gyration Superpave Design Mixture Composition: <u>IL-9.5 mm or IL-12.5 mm</u> (Gradation Mixture) Friction Aggregate: C Surface

State of Illinois Department of Transportation Bureau of Local Roads and Streets

SPECIAL PROVISION FOR INSURANCE

Effective: February 1, 2007 Revised: August 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

The Contractor shall name the following entities as additional insured under the Contractor's general liability insurance policy in accordance with Article 107.27:

Williamson County

I

The entities listed above and their officers, employees, and agents shall be indemnified and held harmless in accordance with Article 107.26.

COMPENSABLE DELAY COSTS (BDE)

Effective: June 2, 2017 Revised: April 1, 2019

Revise Article 107.40(b) of the Standard Specifications to read:

- "(b) Compensation. Compensation will not be allowed for delays, inconveniences, or damages sustained by the Contractor from conflicts with facilities not meeting the above definition; or if a conflict with a utility in an unanticipated location does not cause a shutdown of the work or a documentable reduction in the rate of progress exceeding the limits set herein. The provisions of Article 104.03 notwithstanding, compensation for delays caused by a utility in an unanticipated location will be paid according to the provisions of this Article governing minor and major delays or reduced rate of production which are defined as follows.
 - (1) Minor Delay. A minor delay occurs when the work in conflict with the utility in an unanticipated location is completely stopped for more than two hours, but not to exceed two weeks.
 - (2) Major Delay. A major delay occurs when the work in conflict with the utility in an unanticipated location is completely stopped for more than two weeks.
 - (3) Reduced Rate of Production Delay. A reduced rate of production delay occurs when the rate of production on the work in conflict with the utility in an unanticipated location decreases by more than 25 percent and lasts longer than seven calendar days."

Revise Article 107.40(c) of the Standard Specifications to read:

- "(c) Payment. Payment for Minor, Major, and Reduced Rate of Production Delays will be made as follows.
 - (1) Minor Delay. Labor idled which cannot be used on other work will be paid for according to Article 109.04(b)(1) and (2) for the time between start of the delay and the minimum remaining hours in the work shift required by the prevailing practice in the area.

Equipment idled which cannot be used on other work, and which is authorized to standby on the project site by the Engineer, will be paid for according to Article 109.04(b)(4).

(2) Major Delay. Labor will be the same as for a minor delay.

Equipment will be the same as for a minor delay, except Contractor-owned equipment will be limited to two weeks plus the cost of move-out to either the

Contractor's yard or another job and the cost to re-mobilize, whichever is less. Rental equipment may be paid for longer than two weeks provided the Contractor presents adequate support to the Department (including lease agreement) to show retaining equipment on the job is the most economical course to follow and in the public interest.

(3) Reduced Rate of Production Delay. The Contractor will be compensated for the reduced productivity for labor and equipment time in excess of the 25 percent threshold for that portion of the delay in excess of seven calendar days. Determination of compensation will be in accordance with Article 104.02, except labor and material additives will not be permitted.

Payment for escalated material costs, escalated labor costs, extended project overhead, and extended traffic control will be determined according to Article 109.13."

Revise Article 108.04(b) of the Standard Specifications to read:

- "(b) No working day will be charged under the following conditions.
 - (1) When adverse weather prevents work on the controlling item.
 - (2) When job conditions due to recent weather prevent work on the controlling item.
 - (3) When conduct or lack of conduct by the Department or its consultants, representatives, officers, agents, or employees; delay by the Department in making the site available; or delay in furnishing any items required to be furnished to the Contractor by the Department prevents work on the controlling item.
 - (4) When delays caused by utility or railroad adjustments prevent work on the controlling item.
 - (5) When strikes, lock-outs, extraordinary delays in transportation, or inability to procure critical materials prevent work on the controlling item, as long as these delays are not due to any fault of the Contractor.
 - (6) When any condition over which the Contractor has no control prevents work on the controlling item."

Revise Article 109.09(f) of the Standard Specifications to read:

"(f) Basis of Payment. After resolution of a claim in favor of the Contractor, any adjustment in time required for the work will be made according to Section 108. Any adjustment in the costs to be paid will be made for direct labor, direct materials, direct equipment, direct jobsite overhead, direct offsite overhead, and other direct costs allowed by the resolution. Adjustments in costs will not be made for interest charges, loss of anticipated profit, undocumented loss of efficiency, home office overhead and unabsorbed overhead other than as allowed by Article 109.13, lost opportunity, preparation of claim expenses and other consequential indirect costs regardless of method of calculation.

The above Basis of Payment is an essential element of the contract and the claim cost recovery of the Contractor shall be so limited."

Add the following to Section 109 of the Standard Specifications.

"**109.13 Payment for Contract Delay.** Compensation for escalated material costs, escalated labor costs, extended project overhead, and extended traffic control will be allowed when such costs result from a delay meeting the criteria in the following table.

Contract Type	Cause of Delay	Length of Delay
Working Days	Article 108.04(b)(3) or Article 108.04(b)(4)	No working days have been charged for two consecutive weeks.
Completion Date	Article 108.08(b)(1) or Article 108.08(b)(7)	The Contractor has been granted a minimum two week extension of contract time, according to Article 108.08.

Payment for each of the various costs will be according to the following.

- (a) Escalated Material and/or Labor Costs. When the delay causes work, which would have otherwise been completed, to be done after material and/or labor costs have increased, such increases will be paid. Payment for escalated material costs will be limited to the increased costs substantiated by documentation furnished by the Contractor. Payment for escalated labor costs will be limited to those items in Article 109.04(b)(1) and (2), except the 35 percent and 10 percent additives will not be permitted.
- (b) Extended Project Overhead. For the duration of the delay, payment for extended project overhead will be paid as follows.
 - (1) Direct Jobsite and Offsite Overhead. Payment for documented direct jobsite overhead and documented direct offsite overhead, including onsite supervisory and administrative personnel, will be allowed according to the following table.

Original Contract Amount	Supervisory and Administrative Personnel
Up to \$5,000,000	One Project Superintendent
Over \$ 5,000,000 - up to \$25,000,000	One Project Manager, One Project Superintendent or Engineer, and One Clerk
Over \$25,000,000 - up to \$50,000,000	One Project Manager, One Project Superintendent, One Engineer, and

	One Clerk
0 050 000 000	One Project Manager, Two Project Superintendents,
Over \$50,000,000	One Engineer, and One Clerk

- (2) Home Office and Unabsorbed Overhead. Payment for home office and unabsorbed overhead will be calculated as 8 percent of the total delay cost.
- (c) Extended Traffic Control. Traffic control required for an extended period of time due to the delay will be paid for according to Article 109.04.

When an extended traffic control adjustment is paid under this provision, an adjusted unit price as provided for in Article 701.20(a) for increase or decrease in the value of work by more than ten percent will not be paid.

Upon payment for a contract delay under this provision, the Contractor shall assign subrogation rights to the Department for the Department's efforts of recovery from any other party for monies paid by the Department as a result of any claim under this provision. The Contractor shall fully cooperate with the Department in its efforts to recover from another party any money paid to the Contractor for delay damages under this provision."

80384

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (BDE)

Effective: September 1, 2000 Revised: March 2, 2019

<u>FEDERAL OBLIGATION</u>. The Department of Transportation, as a recipient of federal financial assistance, is required to take all necessary and reasonable steps to ensure nondiscrimination in the award and administration of contracts. Consequently, the federal regulatory provisions of 49 CFR Part 26 apply to this contract concerning the utilization of disadvantaged business enterprises. For the purposes of this Special Provision, a disadvantaged business enterprise (DBE) means a business certified by the Department in accordance with the requirements of 49 CFR Part 26 and listed in the Illinois Unified Certification Program (IL UCP) DBE Directory.

<u>STATE OBLIGATION</u>. This Special Provision will also be used by the Department to satisfy the requirements of the Business Enterprise for Minorities, Females, and Persons with Disabilities Act, 30 ILCS 575. When this Special Provision is used to satisfy state law requirements on 100 percent state-funded contracts, the federal government has no involvement in such contracts (not a federal-aid contract) and no responsibility to oversee the implementation of this Special Provision by the Department on those contracts. DBE participation on 100 percent state-funded contracts will not be credited toward fulfilling the Department's annual overall DBE goal required by the US Department of Transportation to comply with the federal DBE program requirements.

<u>CONTRACTOR ASSURANCE</u>. The Contractor makes the following assurance and agrees to include the assurance in each subcontract the Contractor signs with a subcontractor.

The Contractor, subrecipient, or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The Contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of contracts funded in whole or in part with federal or state funds. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:

- (a) Withholding progress payments;
- (b) Assessing sanctions;
- (c) Liquidated damages; and/or
- (d) Disqualifying the Contractor from future bidding as non-responsible.

<u>OVERALL GOAL SET FOR THE DEPARTMENT</u>. As a requirement of compliance with 49 CFR Part 26, the Department has set an overall goal for DBE participation in its federally assisted contracts. That goal applies to all federal-aid funds the Department will expend in its federally assisted contracts for the subject reporting fiscal year. The Department is required to make a

good faith effort to achieve the overall goal. The dollar amount paid to all approved DBE companies performing work called for in this contract is eligible to be credited toward fulfillment of the Department's overall goal.

<u>CONTRACT GOAL TO BE ACHIEVED BY THE CONTRACTOR</u>. This contract includes a specific DBE utilization goal established by the Department. The goal has been included because the Department has determined the work of this contract has subcontracting opportunities that may be suitable for performance by DBE companies. The determination is based on an assessment of the type of work, the location of the work, and the availability of DBE companies to do a part of the work. The assessment indicates, in the absence of unlawful discrimination and in an arena of fair and open competition, DBE companies can be expected to perform <u>11.00</u>% of the work. This percentage is set as the DBE participation goal for this contract, the Department will only award this contract to a bidder who makes a good faith effort to meet this goal of DBE participation in the performance of the work. A bidder makes a good faith effort for award consideration if either of the following is done in accordance with the procedures set for in this Special Provision:

- (a) The bidder documents enough DBE participation has been obtained to meet the goal or,
- (b) The bidder documents a good faith effort has been made to meet the goal, even though the effort did not succeed in obtaining enough DBE participation to meet the goal.

<u>DBE LOCATOR REFERENCES</u>. Bidders shall consult the IL UCP DBE Directory as a reference source for DBE-certified companies. In addition, the Department maintains a letting and item specific DBE locator information system whereby DBE companies can register their interest in providing quotes on particular bid items advertised for letting. Information concerning DBE companies willing to quote work for particular contracts may be obtained by contacting the Department's Bureau of Small Business Enterprises at telephone number (217) 785-4611, or by visiting the Department's website at:

http://www.idot.illinois.gov/doing-business/certifications/disadvantaged-business-enterprisecertification/il-ucp-directory/index.

<u>BIDDING PROCEDURES</u>. Compliance with this Special Provision is a material bidding requirement and failure of the bidder to comply will render the bid not responsive.

The bidder shall submit a DBE Utilization Plan (form SBE 2026), and a DBE Participation Statement (form SBE 2025) for each DBE company proposed for the performance of work to achieve the contract goal, with the bid. If the Utilization Plan indicates the contract goal will not be met, documentation of good faith efforts shall also be submitted. The documentation of good faith efforts must include copies of each DBE and non-DBE subcontractor quote submitted to the bidder when a non-DBE subcontractor is selected over a DBE for work on the contract. The required forms and documentation must be submitted as a single .pdf file using the "Integrated Contractor Exchange (iCX)" application within the Department's "EBids System".

The Department will not accept a Utilization Plan if it does not meet the bidding procedures set forth herein and the bid will be declared not responsive. In the event the bid is declared not responsive, the Department may elect to cause the forfeiture of the penal sum of the bidder's proposal guaranty and may deny authorization to bid the project if re-advertised for bids.

GOOD FAITH EFFORT PROCEDURES. The contract will not be awarded until the Utilization Plan is approved. All information submitted by the bidder must be complete, accurate and adequately document enough DBE participation has been obtained or document the good faith efforts of the bidder, in the event enough DBE participation has not been obtained, before the Department will commit to the performance of the contract by the bidder. The Utilization Plan will be approved by the Department if the Utilization Plan documents sufficient commercially useful DBE work to meet the contract goal or the bidder submits sufficient documentation of a good faith effort to meet the contract goal pursuant to 49 CFR Part 26, Appendix A. This means the bidder must show that all necessary and reasonable steps were taken to achieve the contract goal. Necessary and reasonable steps are those which, by their scope, intensity and appropriateness to the objective, could reasonably be expected to obtain sufficient DBE participation, even if they were not successful. The Department will consider the quality, quantity, and intensity of the kinds of efforts the bidder has made. Mere pro forma efforts, in other words efforts done as a matter of form, are not good faith efforts; rather, the bidder is expected to have taken genuine efforts that would be reasonably expected of a bidder actively and aggressively trying to obtain DBE participation sufficient to meet the contract goal.

- (a) The following is a list of types of action that the Department will consider as part of the evaluation of the bidder's good faith efforts to obtain participation. These listed factors are not intended to be a mandatory checklist and are not intended to be exhaustive. Other factors or efforts brought to the attention of the Department may be relevant in appropriate cases and will be considered by the Department.
 - (1) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.
 - (2) Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the Contractor might otherwise prefer to perform these work items with its own forces.
 - (3) Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.

- (4) a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.
 - b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also the ability or desire of a bidder to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidders are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable. In accordance with the above Bidding Procedures, the documentation of good faith efforts must include copies of each DBE and non-DBE subcontractor quote submitted to the bidder when a non-DBE subcontractor was selected over a DBE for work on the contract.
- (5) Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.
- (6) Making efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as required by the recipient or Contractor.
- (7) Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.
- (8) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.
- (b) If the Department determines the bidder has made a good faith effort to secure the work commitment of DBE companies to meet the contract goal, the Department will award the contract provided it is otherwise eligible for award. If the Department determines the

bidder has failed to meet the requirements of this Special Provision or that a good faith effort has not been made, the Department will notify the responsible company official designated in the Utilization Plan that the bid is not responsive. The notification will also include a statement of reasons for the adverse determination. If the Utilization Plan is not approved because it is deficient as a technical matter, unless waived by the Department, the bidder will be notified and will be allowed no more than a five calendar day period to cure the deficiency.

(c) The bidder may request administrative reconsideration of an adverse determination by emailing the Department at "DOT.DBE.UP@illinois.gov" within the five calendar days after the receipt of the notification of the determination. The determination shall become final if a request is not made on or before the fifth calendar day. A request may provide additional written documentation or argument concerning the issues raised in the determination statement of reasons, provided the documentation and arguments address efforts made prior to submitting the bid. The request will be reviewed by the Department's Reconsideration Officer. The Reconsideration Officer will extend an opportunity to the bidder to meet in person to consider all issues of documentation and whether the bidder made a good faith effort to meet the goal. After the review by the Reconsideration Officer, the bidder will be sent a written decision within ten working days after receipt of the request for reconsideration, explaining the basis for finding that the bidder did or did not meet the goal or make adequate good faith efforts to do so. A final decision by the Reconsideration Officer that a good faith effort was made shall approve the Utilization Plan submitted by the bidder and shall clear the contract for award. A final decision that a good faith effort was not made shall render the bid not responsive.

<u>CALCULATING DBE PARTICIPATION</u>. The Utilization Plan values represent work anticipated to be performed and paid for upon satisfactory completion. The Department is only able to count toward the achievement of the overall goal and the contract goal the value of payments made for the work actually performed by DBE companies. In addition, a DBE must perform a commercially useful function on the contract to be counted. A commercially useful function is generally performed when the DBE is responsible for the work and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. The Department and Contractor are governed by the provisions of 49 CFR Part 26.55(c) on questions of commercially useful functions as it affects the work. Specific counting guidelines are provided in 49 CFR Part 26.55, the provisions of which govern over the summary contained herein.

- (a) DBE as the Contractor: 100 percent goal credit for that portion of the work performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontracts to a non-DBE does not count toward the DBE goals.
- (b) DBE as a joint venture Contractor: 100 percent goal credit for that portion of the total dollar value of the contract equal to the distinct, clearly defined portion of the work performed by the DBE's own forces.

- (c) DBE as a subcontractor: 100 percent goal credit for the work of the subcontract performed by the DBE's own forces, including the cost of materials and supplies, excluding the purchase of materials and supplies or the lease of equipment by the DBE subcontractor from the Contractor or its affiliates. Work that a DBE subcontractor in turn subcontracts to a non-DBE does not count toward the DBE goal.
- (d) DBE as a trucker: 100 percent goal credit for trucking participation provided the DBE is responsible for the management and supervision of the entire trucking operation for which it is responsible. At least one truck owned, operated, licensed, and insured by the DBE must be used on the contract. Credit will be given for the following:
 - (1) The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services the lessee DBE provides on the contract.
 - (2) The DBE may also lease trucks from a non-DBE firm, including from an owneroperator. The DBE who leases trucks from a non-DBE is entitled to credit only for the fee or commission is receives as a result of the lease arrangement.
- (e) DBE as a material supplier:
 - (1) 60 percent goal credit for the cost of the materials or supplies purchased from a DBE regular dealer.
 - (2) 100 percent goal credit for the cost of materials of supplies obtained from a DBE manufacturer.
 - (3) 100 percent credit for the value of reasonable fees and commissions for the procurement of materials and supplies if not a DBE regular dealer or DBE manufacturer.

<u>CONTRACT COMPLIANCE</u>. Compliance with this Special Provision is an essential part of the contract. The Department is prohibited by federal regulations from crediting the participation of a DBE included in the Utilization Plan toward either the contract goal or the Department's overall goal until the amount to be applied toward the goals has been paid to the DBE. The following administrative procedures and remedies govern the compliance by the Contractor with the contractual obligations established by the Utilization Plan. After approval of the Utilization Plan and award of the contract, the Utilization Plan and individual DBE Participation Statements become part of the contract. If the Contract goal, and the Utilization Plan was approved and contract awarded based upon a determination of good faith, the total dollar value of DBE work calculated in the approved Utilization Plan as a percentage of the awarded contract value shall be come the amended contract goal. All work indicated for performance by an approved DBE shall be performed, managed, and supervised by the DBE executing the DBE Participation Commitment Statement.

- (a) <u>NO AMENDMENT</u>. No amendment to the Utilization Plan may be made without prior written approval from the Department's Bureau of Small Business Enterprises. All requests for amendment to the Utilization Plan shall be emailed to the Department at <u>DOT.DBE.UP@illinois.gov</u>.
- (b) <u>CHANGES TO WORK</u>. Any deviation from the DBE condition-of-award or contract plans, specifications, or special provisions must be approved, in writing, by the Department as provided elsewhere in the Contract. The Contractor shall notify affected DBEs in writing of any changes in the scope of work which result in a reduction in the dollar amount condition-of-award to the contract. Where the revision includes work committed to a new DBE subcontractor, not previously involved in the project, then a Request for Approval of Subcontractor, Department form BC 260A or AER 260A, must be signed and submitted. If the commitment of work is in the form of additional tasks assigned to an existing subcontract, a new Request for Approval of Subcontractor will not be required. However, the Contractor must document efforts to assure the existing DBE subcontractor is capable of performing the additional work and has agreed in writing to the change.
- (c) <u>SUBCONTRACT</u>. The Contractor must provide copies of DBE subcontracts to the Department upon request. Subcontractors shall ensure that all lower tier subcontracts or agreements with DBEs to supply labor or materials be performed in accordance with this Special Provision.
- (d) <u>ALTERNATIVE WORK METHODS</u>. In addition to the above requirements for reductions in the condition of award, additional requirements apply to the two cases of Contractorinitiated work substitution proposals. Where the contract allows alternate work methods which serve to delete or create underruns in condition of award DBE work, and the Contractor selects that alternate method or, where the Contractor proposes a substitute work method or material that serves to diminish or delete work committed to a DBE and replace it with other work, then the Contractor must demonstrate one of the following:
 - (1) The replacement work will be performed by the same DBE (as long as the DBE is certified in the respective item of work) in a modification of the condition of award; or
 - (2) The DBE is aware its work will be deleted or will experience underruns and has agreed in writing to the change. If this occurs, the Contractor shall substitute other work of equivalent value to a certified DBE or provide documentation of good faith efforts to do so; or
 - (3) The DBE is not capable of performing the replacement work or has declined to perform the work at a reasonable competitive price. If this occurs, the Contractor shall substitute other work of equivalent value to a certified DBE or provide documentation of good faith efforts to do so.

(e) <u>TERMINATION AND REPLACEMENT PROCEDURES</u>. The Contractor shall not terminate or replace a DBE listed on the approved Utilization Plan, or perform with other forces work designated for a listed DBE except as provided in this Special Provision. The Contractor shall utilize the specific DBEs listed to perform the work and supply the materials for which each is listed unless the Contractor obtains the Department's written consent as provided in subsection (a) of this part. Unless Department consent is provided for termination of a DBE subcontractor, the Contractor shall not be entitled to any payment for work or material unless it is performed or supplied by the DBE in the Utilization Plan.

As stated above, the Contractor shall not terminate or replace a DBE subcontractor listed in the approved Utilization Plan without prior written consent. This includes, but is not limited to, instances in which the Contractor seeks to perform work originally designated for a DBE subcontractor with its own forces or those of an affiliate, a non-DBE firm, or with another DBE firm. Written consent will be granted only if the Bureau of Small Business Enterprises agrees, for reasons stated in its concurrence document, that the Contractor has good cause to terminate or replace the DBE firm. Before transmitting to the Bureau of Small Business Enterprises any request to terminate and/or substitute a DBE subcontractor, the Contractor shall give notice in writing to the DBE subcontractor, with a copy to the Bureau, of its intent to request to terminate and/or substitute, and the reason for the request. The Contractor shall give the DBE five days to respond to the Contractor's notice. The DBE so notified shall advise the Bureau and the Contractor of the reasons, if any, why it objects to the proposed termination of its subcontract and why the Bureau should not approve the Contractor's action. If required in a particular case as a matter of public necessity, the Bureau may provide a response period shorter than five days.

For purposes of this paragraph, good cause includes the following circumstances:

- (1) The listed DBE subcontractor fails or refuses to execute a written contract;
- (2) The listed DBE subcontractor fails or refuses to perform the work of its subcontract in a way consistent with normal industry standards. Provided, however, that good cause does not exist if the failure or refusal of the DBE subcontractor to perform its work on the subcontract results from the bad faith or discriminatory action of the Contractor;
- (3) The listed DBE subcontractor fails or refuses to meet the Contractor's reasonable, nondiscriminatory bond requirements;
- (4) The listed DBE subcontractor becomes bankrupt, insolvent, or exhibits credit unworthiness;
- (5) The listed DBE subcontractor is ineligible to work on public works projects because of suspension and debarment proceedings pursuant 2 CFR Parts 180, 215 and 1200 or applicable state law.

- (6) The Contractor has determined the listed DBE subcontractor is not a responsible contractor;
- (7) The listed DBE subcontractor voluntarily withdraws from the projects and provides written notice to the Contractor of its withdrawal;
- (8) The listed DBE is ineligible to receive DBE credit for the type of work required;
- (9) A DBE owner dies or becomes disabled with the result that the listed DBE subcontractor is unable to complete its work on the contract;
- (10) Other documented good cause that compels the termination of the DBE subcontractor. Provided, that good cause does not exist if the Contractor seeks to terminate a DBE it relied upon to obtain the contract so that the Contractor can self-perform the work for which the DBE contractor was engaged or so that the Contractor can substitute another DBE or non-DBE contractor after contract award.

When a DBE is terminated or fails to complete its work on the Contract for any reason, the Contractor shall make a good faith effort to find another DBE to substitute for the original DBE to perform at least the same amount of work under the contract as the terminated DBE to the extent needed to meet the established Contract goal. The good faith efforts shall be documented by the Contractor. If the Department requests documentation under this provision, the Contractor shall submit the documentation within seven days, which may be extended for an additional seven days if necessary at the request of the Contractor. The Department will provide a written determination to the Contractor stating whether or not good faith efforts have been demonstrated.

- (f) <u>FINAL PAYMENT</u>. After the performance of the final item of work or delivery of material by a DBE and final payment therefore to the DBE by the Contractor, but not later than 30 calendar days after payment has been made by the Department to the Contractor for such work or material, the Contractor shall submit a DBE Payment Agreement on Department form SBE 2115 to the Resident Engineer. If full and final payment has not been made to the DBE, the DBE Payment Agreement shall indicate whether a disagreement as to the payment required exists between the Contractor and the DBE or if the Contractor believes the work has not been satisfactorily completed. If the Contractor does not have the full amount of work indicated in the Utilization Plan performed by the DBE companies indicated in the Utilization Plan and after good faith efforts are reviewed, the Department may deduct from contract payments to the Contractor the amount of the goal not achieved as liquidated and ascertained damages. The Contractor may request an administrative reconsideration of any amount deducted as damages pursuant to subsection (h) of this part.
- (g) <u>ENFORCEMENT</u>. The Department reserves the right to withhold payment to the Contractor to enforce the provisions of this Special Provision. Final payment shall not be

made on the contract until such time as the Contractor submits sufficient documentation demonstrating achievement of the goal in accordance with this Special Provision or after liquidated damages have been determined and collected.

(h) <u>RECONSIDERATION</u>. Notwithstanding any other provision of the contract, including but not limited to Article 109.09 of the Standard Specifications, the Contractor may request administrative reconsideration of a decision to deduct the amount of the goal not achieved as liquidated damages. A request to reconsider shall be delivered to the Contract Compliance Section and shall be handled and considered in the same manner as set forth in paragraph (c) of "Good Faith Effort Procedures" of this Special Provision, except a final decision that a good faith effort was not made during contract performance to achieve the goal agreed to in the Utilization Plan shall be the final administrative decision of the Department. The result of the reconsideration process is not administratively appealable to the U.S. Department of Transportation.

80029

DISPOSAL FEES (BDE)

Effective: November 1, 2018

Replace Articles 109.04(b)(5) – 109.04(b)(8) of the Standard Specifications with the following:

- "(5) Disposal Fees. When the extra work performed includes paying for disposal fees at a clean construction and demolition debris facility, an uncontaminated soil fill operation or a landfill, the Contractor shall receive, as administrative costs, an amount equal to five percent of the first \$10,000 and one percent of any amount over \$10,000 of the total approved costs of such fees.
- (6) Miscellaneous. No additional allowance will be made for general superintendence, the use of small tools, or other costs for which no specific allowance is herein provided.
- (7) Statements. No payment will be made for work performed on a force account basis until the Contractor has furnished the Engineer with itemized statements of the cost of such force account work. Statements shall be accompanied and supported by invoices for all materials used and transportation charges. However, if materials used on the force account work are not specifically purchased for such work but are taken from the Contractor's stock, then in lieu of the invoices, the Contractor shall furnish an affidavit certifying that such materials were taken from his/her stock, that the quantity claimed was actually used, and that the price and transportation claimed represent the actual cost to the Contractor.

Itemized statements at the cost of force account work shall be detailed as follows.

- a. Name, classification, date, daily hours, total hours, rate, and extension for each laborer and foreman. Payrolls shall be submitted to substantiate actual wages paid if so requested by the Engineer.
- b. Designation, dates, daily hours, total hours, rental rate, and extension for each unit of machinery and equipment.
- c. Quantities of materials, prices and extensions.
- d. Transportation of materials.
- e. Cost of property damage, liability and workmen's compensation insurance premiums, unemployment insurance contributions, and social security tax.
- (8) Work Performed by an Approved Subcontractor. When extra work is performed by an approved subcontractor, the Contractor shall receive, as administrative costs, an amount equal to five percent of the total approved costs of such work with the minimum payment being \$100.

(9) All statements of the cost of force account work shall be furnished to the Engineer not later than 60 days after receipt of the Central Bureau of Construction form "Extra Work Daily Report". If the statement is not received within the specified time frame, all demands for payment for the extra work are waived and the Department is released from any and all such demands. It is the responsibility of the Contractor to ensure that all statements are received within the specified time regardless of the manner or method of delivery."

80402

EMULSIFIED ASPHALTS (BDE)

Effective: August 1, 2019

Revise Article 1032.06 of the Standard Specifications to read:

"1032.06 Emulsified Asphalts. Emulsified asphalts will be accepted according to the current Bureau of Materials Policy Memorandum, "Emulsified Asphalt Acceptance Procedure". These materials shall be homogeneous and shall show no separation of asphalt after thorough mixing, within 30 days after delivery, provided separation has not been caused by freezing. They shall coat the aggregate being used in the work to the satisfaction of the Engineer and shall be according to the following requirements.

- (a) Anionic Emulsified Asphalt. Anionic emulsified asphalts RS-1, RS-2, HFRS-2, SS-1h, and SS-1 shall be according to AASHTO M 140, except as follows.
 - (1) The cement mixing test will be waived when the emulsion is being used as a tack coat.
 - (2) The Solubility in Trichloroethylene test according to AASHTO T 44 may be run in lieu of Ash Content and shall meet a minimum of 97.5 percent.
- (b) Cationic Emulsified Asphalt. Cationic emulsified asphalts CRS-1, CRS-2, CSS-1h, and CSS-1 shall be according to AASHTO M 208, except as follows.
 - (1) The cement mixing test will be waived when the emulsion is being used as a tack coat.
 - (2) The Solubility in Trichloroethylene test according to AASHTO T 44 may be run in lieu of Ash Content and shall meet a minimum of 97.5 percent.
- (c) High Float Emulsion. High float emulsions HFE-90, HFE-150, and HFE-300 are medium setting and shall be according to the following table.

Test	HFE-90	HFE-150	HFE-300
Viscosity, Saybolt Furol, at 122 °F (50 °C),			
(AASHTO T 59), SFS ^{1/}	50 min.	50 min.	50 min.
Sieve Test, No. 20 (850 µm), retained on			
sieve, (AASHTO T 59), %	0.10 max.	0.10 max.	0.10 max.
Storage Stability Test, 1 day,			
(AASHTO T 59), %	1 max.	1 max.	1 max.
Coating Test (All Grades),			
(AASHTO T 59), 3 minutes	stone	e coated thorou	ughly
Distillation Test, (AASHTO T 59):			
Residue from distillation test to			
500 °F (260 °C), %	65 min.	65 min.	65 min.
Oil distillate by volume, %	7 max.	7 max.	7 max.

Characteristics of residue from distillation test to 500 °F (260 °C): Penetration at 77 °F (25 °C), (AASHTO T 49), 100 g,			
5 sec, dmm	90-150	150-300	300 min.
Float Test at 140 °F (60 °C),			
(AASHTO T 50), sec.	1200 min.	1200 min.	1200 min.

- 1/ The emulsion shall be pumpable.
- (d) Penetrating Emulsified Prime. Penetrating Emulsified Prime (PEP) shall be according to AASHTO T 59, except as follows.

Test	Result
Viscosity, Saybolt Furol, at 77 °F (25 °C), SFS	75 max.
Sieve test, retained on No. 20 (850 µm) sieve, %	0.10 max.
Distillation to 500 °F (260 °C) residue, %	38 min.
Oil distillate by volume, %	4 max.

The PEP shall be tested according to the current Bureau of Materials Illinois Laboratory Test Procedure (ILTP), "Sand Penetration Test of Penetrating Emulsified Prime (PEP)". The time of penetration shall be equal to or less than that of MC-30. The depth of penetration shall be equal to or greater than that of MC-30.

- (e) Delete this subparagraph.
- (f) Polymer Modified Emulsified Asphalt. Polymer modified emulsified asphalts, e.g. SS-1hP, CSS-1hP, CRS-2P (formerly CRSP), CQS-1hP (formerly CSS-1h Latex Modified) and HFRS-2P (formerly HFP) shall be according to AASHTO M 316, except as follows.
 - (1) The cement mixing test will be waived when the polymer modified emulsion is being used as a tack coat.
 - (2) CQS-1hP (formerly CSS-1h Latex Modified) emulsion for micro-surfacing treatments shall use latex as the modifier.
 - (3) Upon examination of the storage stability test cylinder after standing undisturbed for 24 hours, the surface shall show minimal to no white, milky colored substance and shall be a homogenous brown color throughout.
 - (4) The distillation for all polymer modified emulsions shall be performed according to AASHTO T 59, except the temperature shall be 374 ± 9 °F (190 ± 5 °C) to be held for a period of 15 minutes and measured using an ASTM 16F (16C) thermometer.
 - (5) The specified temperature for the Elastic Recovery test for all polymer modified emulsions shall be 50.0 ± 1.0 °F (10.0 ± 0.5 °C).

- (6) The Solubility in Trichloroethylene test according to AASHTO T 44 may be run in lieu of Ash Content and shall meet a minimum of 97.5 percent.
- (g) Non-Tracking Emulsified Asphalt. Non-tracking emulsified asphalt NTEA (formerly SS-1vh) shall be according to the following.

Test	Requirement		
Saybolt Viscosity at 77 °F (25 °C),			
(AASHTO T 59), SFS	20-100		
Storage Stability Test, 24 hr, (AASHTO T 59), %	1 max.		
Residue by Distillation, 500 ± 10 °F (260 ± 5 °C), or			
Residue by Evaporation, $325 \pm 5 \degree F (163 \pm 3 \degree C)$,			
(AASHTO T 59), %	50 min.		
Sieve Test, No. 20 (850 µm), (AASHTO T 59), %	0.3 max.		
Tests on Residue from Evaporation			
Penetration at 77 °F (25 °C), 100 g, 5 sec,			
(AASHTO T 49), dmm	40 max.		
Softening Point, (AASHTO T 53), °F (°C)	135 (57) min.		
Ash Content, (AASHTO T 111), % ^{1/}	1 max.		

1/ The Solubility in Trichloroethylene test according to AASHTO T 44 may be run in lieu of Ash Content and shall meet a minimum of 97.5 percent

The different grades are, in general, used for the following.

Grade	Use
SS-1, SS-1h, RS-1, RS-2, CSS-1, CRS-1, CRS-2, CSS-1h, HFE-90, SS-1hP, CSS-1hP, NTEA (formerly SS-1vh)	Tack Coat
PEP	Prime Coat
RS-2, HFE-90, HFE-150, HFE-300, CRS-2P (formerly CRSP), HFRS-2P (formerly HFP), CRS-2, HFRS-2	Bituminous Surface Treatment
CQS-1hP (formerly CSS-1h Latex Modified)	Micro-Surfacing Slurry Sealing Cape Seal"

80415

EQUIPMENT PARKING AND STORAGE (BDE)

Effective: November 1, 2017

Replace the first paragraph of Article 701.11 of the Standard Specifications with the following.

"**701.11 Equipment Parking and Storage.** During working hours, all vehicles and/or nonoperating equipment which are parked, two hours or less, shall be parked at least 8 ft (2.5 m) from the open traffic lane. For other periods of time during working and for all nonworking hours, all vehicles, materials, and equipment shall be parked or stored as follows.

- (a) When the project has adequate right-of-way, vehicles, materials, and equipment shall be located a minimum of 30 ft (9 m) from the pavement.
- (b) When adequate right-of-way does not exist, vehicles, materials, and equipment shall be located a minimum of 15 ft (4.5 m) from the edge of any pavement open to traffic.
- (c) Behind temporary concrete barrier, vehicles, materials, and equipment shall be located a minimum of 24 in. (600 mm) behind free standing barrier or a minimum of 6 in. (150 mm) behind barrier that is either pinned or restrained according to Article 704.04. The 24 in. or 6 in. measurement shall be from the base of the non-traffic side of the barrier.
- (d) Behind other man-made or natural barriers meeting the approval of the Engineer."

80388

HOT-MIX ASPHALT – BINDER AND SURFACE COURSE (BDE)

Effective: July 2, 2019 Revised: November 1, 2019

<u>Description</u>. This work shall consist of constructing a hot-mix asphalt (HMA) binder and/or surface course on a prepared base. Work shall be according to Sections 406 and 1030 of the Standard Specifications, except as modified herein.

Materials. Add the following after the second paragraph of Article 1003.03(c):

"For mixture IL-9.5FG, at least 67 percent of the required fine aggregate fraction shall consist of either stone sand, slag sand, steel slag sand, or combinations thereof meeting FA 20 gradation."

Revise Article 1004.03(c) to read:

"(c) Gradation. The coarse aggregate gradations shall be as listed in the following table.

Use	Size/Application	Gradation No.	
Class A-1, A-2, & A-3	3/8 in. (10 mm) Seal	CA 16 or CA 20	
Class A-1	1/2 in. (13 mm) Seal	CA 15	
Class A-2 & A-3	Cover Coat	CA 14	
	IL-19.0	CA 11 ^{1/}	
	SMA 12.5 ^{2/}	CA 13, CA 14, or CA 16	
HMA High ESAL	SMA 9.5 ^{2/}	CA 13 or CA 16 ^{3/}	
	IL-9.5	CA 16	
	IL-9.5FG	CA 16	
	IL-19.0L	CA 11 ^{1/}	
HMA Low ESAL	IL-9.5L	CA 16	

- 1/ CA 16 or CA 13 may be blended with the CA 11.
- 2/ The coarse aggregates used shall be capable of being combined with stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation and mineral filler to meet the approved mix design and the mix requirements noted herein.
- 3/ The specified coarse aggregate gradations may be blended."

HMA Nomenclature. Revise the "High ESAL" portion of the table in Article 1030.01 to read:

"High ESAL Binder Courses IL-19.0, IL-9.3, IL-9.3FG, IL-4.75, SMA 12.5, SMA 9.5	"High ESAL B		IL-19.0, IL-9.5, IL-9.5FG, IL-4.75, SMA 12.5, SMA 9.5
---	--------------	--	--

Surface Course	s IL-9.5, IL-9.5FG, SMA 12.5, SMA 9.5"
----------------	---

<u>Mixture Design</u>. Revise the table in Article 1030.04(a)(1) and add SMA 9.5 and IL-9.5FG mixture compositions as follows:

"HIGH ESAL, MIXTURE COMPOSITION (% PASSING) 1/						
Sieve Size SM		12.5 ^{5/}	SMA 9.5 ^{5/}		IL-9.5FG	
Oleve Olze	min.	max.	min.	max.	min.	max.
1 in. (25 mm)						
3/4 in. (19 mm)		100		100		
1/2 in. (12.5 mm)	90	99	95	100		100
3/8 in. (9.5 mm)	50	85	70	95	90	100
#4 4.75 mm)	20	40	30	50	60	75
#8 (2.36 mm)	16	24 4/	20	30	45	60
#16 (1.18 mm)				21	25	40
#30 (600 μm)				18	15	30
#50 (300 μm)				15	8	15
#100 (150 μm)					6	10
#200 (75 μm)	8.0	11.0 ^{3/}	8.0	11.0 ^{3/}	4.0	6.5
#635 (20 μm)		≤ 3.0		≤ 3.0		
Ratio of Dust/Asphalt Binder						1.0

1/ Based on percent of total aggregate weight.

2/ The mixture composition shall not exceed 44 percent passing the #8 (2.36 mm) sieve for surface courses with Ndesign = 90.

- 3/ Additional minus No. 200 (0.075 mm) material required by the mix design shall be mineral filler, unless otherwise approved by the Engineer.
- 4/ When establishing the adjusted job mix formula (AJMF) the percent passing the #8 (2.36 mm) sieve shall not be adjusted above 24 percent.
- 5/ When the bulk specific gravity (Gsb) of the component aggregates vary by more than 0.2, the blend gradations shall be based on volumetric percentage."

Revise the table in Article 1030.04(b)(1) to read:

"VOLUMETRIC REQUIREMENTS, High ESAL					
				Voids Filled with Asphalt Binder	
INCESIGIT	IL-19.0	IL-9.5 IL-9.5FG IL-4.75 ^{1/}		(VFA),%	
50	18.5		65 - 78 ^{2/}		
70	13.5	15.0		65 – 75 ^{3/}	
90				00 - 75	

- 1/ Maximum draindown for IL-4.75 shall be 0.3 percent.
- 2/ VFA for IL-4.75 shall be 76-83 percent.
- 3/ VFA for IL-9.5FG shall be 65-78 percent."

Revise the table in Article 1030.04(b)(3) to read:

"VOLUMETRIC REQUIREMENTS, SMA 12.5 $^{\rm 1/}$ and SMA 9.5 $^{\rm 1/}$				
ESALs (million) Ndesign Ndesign Air Voids Target, % Voids in the Mineral Aggregate (VMA), % mi				Voids Filled with Asphalt (VFA), %
≤ 10	50	4.0	16.0	75 – 80
> 10	80	4.0	17.0	75 – 80

1/ Maximum draindown shall be 0.3 percent."

<u>Quality Control/Quality Assurance (QC/QA)</u>. Revise the third paragraph of Article 1030.05(d)(3) to read:

"If the Contractor and Engineer agree the nuclear density test method is not appropriate for the mixture, cores shall be taken at random locations determined according to the QC/QA document "Determination of Random Density Test Site Locations". Core densities shall be determined using the Illinois Modified AASHTO T 166 or T 275 procedure."

Add the following paragraphs to the end of Article 1030.05(d)(3):

"Longitudinal joint density testing shall be performed at each random density test location. Longitudinal joint testing shall be located at a distance equal to the lift thickness or a minimum of 4 in. (100 mm), from each pavement edge (i.e. for a 5 in. (125 mm) lift the near edge of the density gauge or core barrel shall be within 5 in. (125 mm) from the edge of pavement). Longitudinal joint density testing shall be performed using either a correlated nuclear gauge or cores.

- a. Confined Edge. Each confined edge density shall be represented by a one-minute nuclear density reading or a core density and shall be included in the average of density readings or core densities taken across the mat which represents the Individual Test.
- b. Unconfined Edge. Each unconfined edge joint density shall be represented by an average of three one-minute density readings or a single core density at the given density test location and shall meet the density requirements specified herein. The three one-minute readings shall be spaced 10 ft (3 m) apart longitudinally along the unconfined pavement edge and centered at the random density test location.

When a longitudinal joint sealant (LJS) is applied, longitudinal joint density testing will not be required on the joint(s) sealed."

"DENSITY CONTROL LIMITS				
Mixture Composition	Parameter	Individual Test (includes confined edges)	Unconfined Edge Joint Density, minimum	
IL-4.75	Ndesign = 50	93.0 – 97.4 % ^{1/}	91.0%	
IL-9.5FG	Ndesign = 50 - 90	93.0 – 97.4 %	91.0%	
IL-9.5	Ndesign = 90	92.0 - 96.0 %	90.0%	
IL-9.5, IL-9.5L,	Ndesign < 90	92.5 – 97.4 %	90.0%	
IL-19.0	Ndesign = 90	93.0 – 96.0 %	90.0%	
IL-19.0, IL-19.0L	Ndesign < 90	93.0 ^{2/} – 97.4 %	90.0%	
SMA	Ndesign = 50 or 80	93.5 – 97.4 %	91.0%	

Revise the second table in Article 1030.05(d)(4) and its notes to read:

1/ Density shall be determined by cores or by correlated, approved thin lift nuclear gauge.

2/ 92.0 % when placed as first lift on an unimproved subgrade."

Equipment. Add the following to Article 1101.01 of the Standard Specifications:

- "(h) Oscillatory Roller. The oscillatory roller shall be self-propelled and provide a smooth operation when starting, stopping, or reversing directions. The oscillatory roller shall be able to operate in a mode that will provide tangential impact force with or without vertical impact force by using at least one drum. The oscillatory roller shall be equipped with water tanks and sprinkling devices, or other approved methods, which shall be used to wet the drums to prevent material pickup. The drum(s) amplitude and frequency of the tangential and vertical impact force shall be approximately the same in each direction and meet the following requirements:
 - (1) The minimum diameter of the drum(s) shall be 42 in. (1070 mm);
 - (2) The minimum length of the drum(s) shall be 57 in. (1480 mm);
 - (3) The minimum unit static force on the drum(s) shall be 125 lb/in. (22 N/m); and
 - (4) The minimum force on the oscillatory drum shall be 18,000 lb (80 kN)."

CONSTRUCTION REQUIREMENTS

Add the following to Article 406.03 of the Standard Specifications:

Revise the third paragraph of Article 406.05(a) to read:

"All depressions of 1 in. (25 mm) or more in the surface of the existing pavement shall be filled with binder. At locations where heavy disintegration and deep spalling exists, the area shall be cleaned of all loose and unsound material, tacked, and filled with binder (hand method)."

Revise Article 406.05(c) to read.

"(c) Binder (Hand Method). Binder placed other than with a finishing machine will be designated as binder (hand method) and shall be compacted with a roller to the satisfaction of the Engineer. Hand tamping will be permitted when approved by the Engineer."

Revise the special conditions for mixture IL-4.75 in Article 406.06(b)(2)e. to read:

"e. The mixture shall be overlaid within 5 days of being placed."

Revise Article 406.06(d) to read:

"(d) Lift Thickness. The minimum compacted lift thickness for HMA binder and surface courses shall be as follows.

MINIMUM COMPACTED LIFT THICKNESS			
Mixture Composition Thickness, in. (mm)			
IL-4.75	3/4 (19) - over HMA surfaces ^{1/} 1 (25) - over PCC surfaces ^{1/}		
IL-9.5FG 1 1/4 (32)			
IL-9.5, IL-9.5L 1 1/2 (38)			
SMA 9.5	1 1/2 (38)		
SMA 12.5	2 (51)		
IL-19.0, IL-19.0L	2 1/4 (57)		

1/ The maximum compacted lift thickness for mixture IL-4.75 shall be 1 1/4 in. (32 mm)."

Revise Table 1 and Note 3/ of Table 1 in Article 406.07(a) of the Standard Specifications to read:

"TABLE 1 - MINIMUM ROLLER REQUIREMENTS FOR HMA						
Breakdown Roller Intermediate Final Roller One of the following) Intermediate Final Roller (one or more of following)						
Binder and Surface ^{1/}	V _D , P ^{3/} , T _B , 3W, O _T , O _B	Р ^{3/} , О _Т , О _В	Vs, Tb, T _f , Ot	As specified in Articles: 1030.05(d)(3), (d)(4), and (d)(7).		
IL-4.75 and SMA 4/5/	T_{B} , 3W, O_{T}		T_F , 3W, O_T			
Bridge Decks ^{2/}	Тв		TF	As specified in Articles 582.05 and 582.06.		

3/ A vibratory roller (V_D) or oscillatory roller (O_T or O_B) may be used in lieu of the pneumatic-tired roller on mixtures containing polymer modified asphalt binder."

Add the following to EQUIPMENT DEFINITION in Article 406.07(a) contained in the Errata of the Supplemental Specifications:

- "O_T Oscillatory roller, tangential impact mode. Maximum speed is 3.0 mph (4.8 km/h) or 264 ft/min (80 m/min).
- O_B Oscillatory roller, tangential and vertical impact mode, operated at a speed to produce not less than 10 vertical impacts/ft (30 impacts/m)."

<u>Basis of Payment</u>. Replace the second through the fifth paragraphs of Article 406.14 with the following:

"HMA binder and surface courses will be paid for at the contract unit price per ton (metric ton) for MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS; HOT-MIX ASPHALT BINDER COURSE (HAND METHOD), of the Ndesign specified; HOT-MIX ASPHALT BINDER COURSE, of the mixture composition and Ndesign specified; HOT-MIX ASPHALT SURFACE COURSE, of the mixture composition, friction aggregate, and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT BINDER COURSE (HAND METHOD), of the Ndesign specified; POLYMERIZED HOT-MIX ASPHALT BINDER COURSE (HAND METHOD), of the Ndesign specified; POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, of the mixture composition and Ndesign specified; POLYMERIZED HOT-MIX ASPHALT, of the mixture composition, friction aggregate, and Ndesign specified."

MOBILIZATION (BDE)

Effective: April 1, 2020

Replace Articles 671.02(a), (b), and (c) of the Standard Specifications with the following:

- "(a) Upon execution of the contract, 90 percent of the pay item will be paid.
- (b) When 90 percent of the adjusted contract value is earned, the remaining ten percent of the pay item will be paid along with any amount bid in excess of six percent of the original contract amount."

RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES (BDE)

Effective: November 1, 2012 Revised: January 2, 2020

Revise Section 1031 of the Standard Specifications to read:

"SECTION 1031. RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES

1031.01 Description. Reclaimed asphalt pavement and reclaimed asphalt shingles shall be according to the following.

- (a) Reclaimed Asphalt Pavement (RAP). RAP is the material produced by cold milling or crushing an existing hot-mix asphalt (HMA) pavement. The Contractor shall supply written documentation that the RAP originated from routes or airfields under federal, state, or local agency jurisdiction.
- (b) Reclaimed Asphalt Shingles (RAS). Reclaimed asphalt shingles (RAS). RAS is from the processing and grinding of preconsumer or post-consumer shingles. RAS shall be a clean and uniform material with a maximum of 0.5 percent unacceptable material, as defined in Central Bureau of Materials Policy Memorandum, "Reclaimed Asphalt Shingle (RAS) Sources", by weight of RAS. All RAS used shall come from a Central Bureau of Materials approved processing facility where it shall be ground and processed to 100 percent passing the 3/8 in. (9.5 mm) sieve and 93 percent passing the #4 (4.75 mm) sieve based on a dry shake gradation. RAS shall be uniform in gradation and asphalt binder content and shall meet the testing requirements specified herein. In addition, RAS shall meet the following Type 1 or Type 2 requirements.
 - (1) Type 1. Type 1 RAS shall be processed, preconsumer asphalt shingles salvaged from the manufacture of residential asphalt roofing shingles.
 - (2) Type 2. Type 2 RAS shall be processed post-consumer shingles only, salvaged from residential, or four unit or less dwellings not subject to the National Emission Standards for Hazardous Air Pollutants (NESHAP).

1031.02 Stockpiles. RAP and RAS stockpiles shall be according to the following.

(a) RAP Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. No additional RAP shall be added to the pile after the pile has been sealed. Stockpiles shall be sufficiently separated to prevent intermingling at the base. Stockpiles shall be identified by signs indicating the type as listed below (i.e. "Homogeneous Surface").

Prior to milling, the Contractor shall request the District provide documentation on the quality of the RAP to clarify the appropriate stockpile.

(1) Fractionated RAP (FRAP). FRAP shall consist of RAP from Class I, HMA (High and Low ESAL) mixtures. The coarse aggregate in FRAP shall be crushed aggregate and may represent more than one aggregate type and/or quality, but shall be at least C quality. All FRAP shall be fractionated prior to testing by screening into a minimum of two size fractions with the separation occurring on or between the #4 (4.75 mm) and 1/2 in. (12.5 mm) sieves. Agglomerations shall be minimized such that 100 percent of the RAP shall pass the sieve size specified below for the mix into which the FRAP will be incorporated.

Mixture FRAP will be used in:	Sieve Size that 100 % of FRAP Shall Pass
IL-19.0	1 1/2 in. (37.5 mm)
SMA 12.5	1 in. (25.0 mm)
IL-9.5, IL-9.5FG, SMA 9.5	3/4 in. (19.0 mm)
IL-4.75	1/2 in. (12.5 mm)

- (2) Homogeneous. Homogeneous RAP stockpiles shall consist of RAP from Class I, HMA (High and Low ESAL) mixtures and represent: 1) the same aggregate quality, but shall be at least C quality; 2) the same type of crushed aggregate (either crushed natural aggregate, ACBF slag, or steel slag); 3) similar gradation; and 4) similar asphalt binder content. If approved by the Engineer, combined single pass surface/binder millings may be considered "homogeneous" with a quality rating dictated by the lowest coarse aggregate quality present in the mixture.
- (3) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I, HMA (High and Low ESAL) mixtures. The coarse aggregate in this RAP shall be crushed aggregate and may represent more than one aggregate type and/or quality, but shall be at least C quality. This RAP may have an inconsistent gradation and/or asphalt binder content prior to processing. All conglomerate RAP shall be processed prior to testing by crushing to where all RAP shall pass the 5/8 in. (16 mm) or smaller screen. Conglomerate RAP stockpiles shall not contain steel slag.
- (4) Non-Quality. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Non-Quality".

RAP/FRAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, joint sealants, etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.

(b) RAS Stockpiles. Type 1 and Type 2 RAS shall be stockpiled separately and shall not be intermingled. Each stockpile shall be signed indicating what type of RAS is present.

Unless otherwise specified by the Engineer, mechanically blending manufactured sand (FM 20 or FM 22) up to an equal weight of RAS with the processed RAS will be permitted

to improve workability. The sand shall be "B Quality" or better from an approved Aggregate Gradation Control System source. The sand shall be accounted for in the mix design and during HMA production.

Records identifying the shingle processing facility supplying the RAS, RAS type, and lot number shall be maintained by project contract number and kept for a minimum of three years.

1031.03 Testing. RAP/FRAP and RAS testing shall be according to the following.

- (a) RAP/FRAP Testing. When used in HMA, the RAP/FRAP shall be sampled and tested either during or after stockpiling.
 - (1) During Stockpiling. For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 500 tons (450 metric tons) for the first 2000 tons (1800 metric tons) and one sample per 2000 tons (1800 metric tons) thereafter. A minimum of five tests shall be required for stockpiles less than 4000 tons (3600 metric tons).
 - (2) After Stockpiling. For testing after stockpiling, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP/FRAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to obtain representative samples throughout the pile for testing.

Each sample shall be split to obtain two equal samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

(b) RAS Testing. RAS or RAS blended with manufactured sand shall be sampled and tested during stockpiling according to Central Bureau of Materials Policy Memorandum, "Reclaimed Asphalt Shingle (RAS) Source".

Samples shall be collected during stockpiling at the minimum frequency of one sample per 200 tons (180 metric tons) for the first 1000 tons (900 metric tons) and one sample per 250 tons (225 metric tons) thereafter. A minimum of five samples are required for stockpiles less than 1000 tons (900 metric tons). Once a \leq 1000 ton (900 metric ton), five-sample/test stockpile has been established it shall be sealed. Additional incoming RAS or RAS blended with manufactured sand shall be stockpiled in a separate working pile as designated in the Quality Control plan and only added to the sealed stockpile when the test results of the working pile are complete and are found to meet the tolerances specified herein for the original sealed RAS stockpile.

Before testing, each sample shall be split to obtain two test samples. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall perform a washed extraction and test for unacceptable materials on the other test sample according to Department procedures. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

If the sampling and testing was performed at the shingle processing facility in accordance with the QC Plan, the Contractor shall obtain and make available all of the test results from start of the initial stockpile.

1031.04 Evaluation of Tests. Evaluation of test results shall be according to the following.

(a) Evaluation of RAP/FRAP Test Results. All of the extraction results shall be compiled and averaged for asphalt binder content and gradation, and when applicable G_{mm}. Individual extraction test results, when compared to the averages, will be accepted if within the tolerances listed below.

Parameter	FRAP/Homogeneous/ Conglomerate
1 in. (25 mm)	
1/2 in. (12.5 mm)	± 8 %
No. 4 (4.75 mm)	± 6 %
No. 8 (2.36 mm)	± 5 %
No. 16 (1.18 mm)	
No. 30 (600 µm)	± 5 %
No. 200 (75 µm)	± 2.0 %
Asphalt Binder	\pm 0.4 % $^{1/}$
G _{mm}	± 0.03

1/ The tolerance for FRAP shall be \pm 0.3 %.

If more than 20 percent of the individual sieves and/or asphalt binder content tests are out of the above tolerances, the RAP/FRAP shall not be used in HMA unless the RAP/FRAP representing the failing tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the ITP, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)".

(b) Evaluation of RAS and RAS Blended with Manufactured Sand Test Results. All of the test results, with the exception of percent unacceptable materials, shall be compiled and averaged for asphalt binder content and gradation. Individual test results, when compared to the averages, will be accepted if within the tolerances listed below.

Parameter	RAS
No. 8 (2.36 mm)	±5%
No. 16 (1.18 mm)	± 5 %
No. 30 (600 µm)	±4%
No. 200 (75 μm)	± 2.0 %
Asphalt Binder Content	± 1.5 %

If more than 20 percent of the individual sieves and/or asphalt binder content tests are out of the above tolerances, or if the percent unacceptable material exceeds 0.5 percent by weight of material retained on the # 4 (4.75 mm) sieve, the RAS or RAS blend shall not be used in Department projects. All test data and acceptance ranges shall be sent to the District for evaluation.

1031.05 Quality Designation of Aggregate in RAP/FRAP.

- (a) RAP. The aggregate quality of the RAP for homogeneous and conglomerate stockpiles shall be set by the lowest quality of coarse aggregate in the RAP stockpile and are designated as follows.
 - (1) RAP from Class I, Superpave/HMA (High ESAL), or (Low ESAL) IL-9.5L surface mixtures are designated as containing Class B quality coarse aggregate.
 - (2) RAP from Class I binder, Superpave/HMA (High ESAL) binder, or (Low ESAL) IL-19.0L binder mixtures are designated as containing Class C quality coarse aggregate.
- (b) FRAP. If the Engineer has documentation of the quality of the FRAP aggregate, the Contractor shall use the assigned quality provided by the Engineer.

If the quality is not known, the quality shall be determined as follows. Coarse and fine FRAP stockpiles containing plus #4 (4.75 mm) sieve coarse aggregate shall have a maximum tonnage of 5000 tons (4500 metric tons). The Contractor shall obtain a representative sample witnessed by the Engineer. The sample shall be a minimum of 50 lb (25 kg). The sample shall be extracted according to Illinois Modified AASHTO T 164 by a consultant laboratory prequalified by the Department for the specified testing. The consultant laboratory shall submit the test results along with the recovered aggregate to the District Office. The cost for this testing shall be paid by the Contractor. The District will forward the sample to the Central Bureau of Materials Aggregate Lab for MicroDeval Testing, according to ITP 327. A maximum loss of 15.0 percent will be applied for all HMA applications.

1031.06 Use of RAP/FRAP and/or RAS in HMA. The use of RAP/FRAP and/or RAS shall be the Contractor's option when constructing HMA in all contracts.

- (a) RAP/FRAP. The use of RAP/FRAP in HMA shall be as follows.
 - (1) Coarse Aggregate Size. The coarse aggregate in all RAP shall be equal to or less than the nominal maximum size requirement for the HMA mixture to be produced.
 - (2) Steel Slag Stockpiles. Homogeneous RAP stockpiles containing steel slag will be approved for use in all HMA (High ESAL and Low ESAL) Surface and Binder Mixture applications.
 - (3) Use in HMA Surface Mixtures (High and Low ESAL). RAP/FRAP stockpiles for use in HMA surface mixtures (High and Low ESAL) shall be FRAP or homogeneous in which the coarse aggregate is Class B quality or better. FRAP from Conglomerate stockpiles shall be considered equivalent to limestone for frictional considerations. Known frictional contributions from plus #4 (4.75 mm) homogeneous FRAP stockpiles will be accounted for in meeting frictional requirements in the specified mixture.
 - (4) Use in HMA Binder Mixtures (High and Low ESAL), HMA Base Course, and HMA Base Course Widening. RAP/FRAP stockpiles for use in HMA binder mixtures (High and Low ESAL), HMA base course, and HMA base course widening shall be FRAP, homogeneous, or conglomerate, in which the coarse aggregate is Class C quality or better.
 - (5) Use in Shoulders and Subbase. RAP/FRAP stockpiles for use in HMA shoulders and stabilized subbase (HMA) shall be FRAP, homogeneous, or conglomerate.
 - (6) When the Contractor chooses the RAP option, the percentage of RAP shall not exceed the amounts indicated in Article 1031.06(c)(1) below for a given Ndesign.
- (b) RAS. RAS meeting Type 1 or Type 2 requirements will be permitted in all HMA applications as specified herein.
- (c) RAP/FRAP and/or RAS Usage Limits. Type 1 or Type 2 RAS may be used alone or in conjunction with RAP or FRAP in HMA mixtures up to a maximum of 5.0 percent by weight of the total mix.
 - (1) RAP/RAS. When RAP is used alone or RAP is used in conjunction with RAS, the percentage of virgin asphalt binder replacement shall not exceed the amounts listed in the following table.

HMA Mixtures ^{1/2/}	RAP/RAS Maximum ABR %			
Ndesign	Binder Surface Polymer Modified Binder or Surface			
30	30	30	10	

RAP/RAS Maximum Asphalt Binder Replacement (ABR) Percentage

50	25	15	10
70	15	10	10
90	10	10	10

- 1/ For Low ESAL HMA shoulder and stabilized subbase, the RAP/RAS ABR shall not exceed 50 percent of the mixture.
- 2/ When RAP/RAS ABR exceeds 20 percent, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28). If warm mix asphalt (WMA) technology is utilized and production temperatures do not exceed 275 °F (135 °C), the high and low virgin asphalt binder grades shall each be reduced by one grade when RAP/RAS ABR exceeds 25 percent (i.e. 26 percent RAP/RAS ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28).
- (2) FRAP/RAS. When FRAP is used alone or FRAP is used in conjunction with RAS, the percentage of virgin asphalt binder replacement shall not exceed the amounts listed in the following table.

HMA Mixtures ^{1/2/}	FRAP/RAS Maximum ABR %			
Ndesign	Binder Surface Polymer Modifie Binder or Surfa			
30	50	10		
50	40	10		
70	40	10		
90	40	10		
SMA		20		
IL-4.75		30		

FRAP/RAS Maximum Asphalt Binder Replacement (ABR) Percentage

- 1/ For Low ESAL HMA shoulder and stabilized subbase, the FRAP/RAS ABR shall not exceed 50 percent of the mixture.
- 2/ When FRAP/RAS ABR exceeds 20 percent for all mixes, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28). If warm mix asphalt (WMA) technology is utilized and production temperatures do not exceed 275 °F (135 °C), the high and low virgin asphalt binder grades shall each be reduced by one grade when FRAP/RAS ABR exceeds 25 percent (i.e. 26 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 64-22 to be reduced to a PG 58-28).

1031.07 HMA Mix Designs. At the Contractor's option, HMA mixtures may be constructed utilizing RAP/FRAP and/or RAS material meeting the detailed requirements specified herein.

- (a) RAP/FRAP and/or RAS. RAP/FRAP and/or RAS mix designs shall be submitted for verification. If additional RAP/FRAP and/or RAS stockpiles are tested and found that no more than 20 percent of the results, as defined under "Testing" herein, are outside of the control tolerances set for the original RAP/FRAP and/or RAS stockpile and HMA mix design, and meets all of the requirements herein, the additional RAP/FRAP and/or RAS stockpiles may be used in the original mix design at the percent previously verified.
- (b) RAS. Type 1 and Type 2 RAS are not interchangeable in a mix design.

The RAP, FRAP, and RAS stone bulk specific gravities (G_{sb}) shall be according to the "Determination of Aggregate Bulk (Dry) Specific Gravity (G_{sb}) of Reclaimed Asphalt Pavement (RAP) and Reclaimed Asphalt Shingles (RAS)" procedure in the Department's Manual of Test Procedures for Materials.

1031.08 HMA Production. HMA production utilizing RAP/FRAP and/or RAS shall be as follows.

(a) RAP/FRAP. The coarse aggregate in all RAP/FRAP used shall be equal to or less than the nominal maximum size requirement for the HMA mixture being produced.

To remove or reduce agglomerated material, a scalping screen, gator, crushing unit, or comparable sizing device approved by the Engineer shall be used in the RAP feed system to remove or reduce oversized material.

If the RAP/FRAP control tolerances or QC/QA test results require corrective action, the Contractor shall cease production of the mixture containing RAP/FRAP and either switch to the virgin aggregate design or submit a new RAP/FRAP design.

- (b) RAS. RAS shall be incorporated into the HMA mixture either by a separate weight depletion system or by using the RAP weigh belt. Either feed system shall be interlocked with the aggregate feed or weigh system to maintain correct proportions for all rates of production and batch sizes. The portion of RAS shall be controlled accurately to within ± 0.5 percent of the amount of RAS utilized. When using the weight depletion system, flow indicators or sensing devices shall be provided and interlocked with the plant controls such that the mixture production is halted when RAS flow is interrupted.
- (c) RAP/FRAP and/or RAS. HMA plants utilizing RAP/FRAP and/or RAS shall be capable of automatically recording and printing the following information.
 - (1) Dryer Drum Plants.
 - a. Date, month, year, and time to the nearest minute for each print.

- b. HMA mix number assigned by the Department.
- c. Accumulated weight of dry aggregate (combined or individual) in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
- d. Accumulated dry weight of RAP/FRAP/RAS in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
- e. Accumulated mineral filler in revolutions, tons (metric tons), etc. to the nearest 0.1 unit.
- f. Accumulated asphalt binder in gallons (liters), tons (metric tons), etc. to the nearest 0.1 unit.
- g. Residual asphalt binder in the RAP/FRAP material as a percent of the total mix to the nearest 0.1 percent.
- Aggregate and RAP/FRAP moisture compensators in percent as set on the control panel. (Required when accumulated or individual aggregate and RAP/FRAP are printed in wet condition.)
- (2) Batch Plants.
 - a. Date, month, year, and time to the nearest minute for each print.
 - b. HMA mix number assigned by the Department.
 - c. Individual virgin aggregate hot bin batch weights to the nearest pound (kilogram).
 - d. Mineral filler weight to the nearest pound (kilogram).
 - e. RAP/FRAP/RAS weight to the nearest pound (kilogram).
 - f. Virgin asphalt binder weight to the nearest pound (kilogram).
 - g. Residual asphalt binder in the RAP/FRAP/RAS material as a percent of the total mix to the nearest 0.1 percent.

The printouts shall be maintained in a file at the plant for a minimum of one year or as directed by the Engineer and shall be made available upon request. The printing system will be inspected by the Engineer prior to production and verified at the beginning of each construction season thereafter.

1031.09 RAP in Aggregate Surface Course and Aggregate Wedge Shoulders, Type B. The use of RAP in aggregate surface course (temporary access entrances only) and aggregate wedge shoulders, Type B shall be as follows.

- (a) Stockpiles and Testing. RAP stockpiles may be any of those listed in Article 1031.02, except "Non-Quality" and "FRAP". The testing requirements of Article 1031.03 shall not apply. RAP used shall be according to the current Central Bureau of Materials Policy Memorandum, "Reclaimed Asphalt Pavement (RAP) for Aggregate Applications".
- (b) Gradation. One hundred percent of the RAP material shall pass the 1 1/2 in. (37.5 mm) sieve. The RAP material shall be reasonably well graded from coarse to fine. RAP material that is gap-graded or single sized will not be accepted."

REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES (BDE)

Effective: January 1, 2019 Revised: January 1, 2020

Revise Section 669 of the Standard Specifications to read:

"SECTION 669. REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES

669.01 Description. This work shall consist of the transportation and proper disposal of regulated substances. This work shall also consist of the removal, transportation, and proper disposal of underground storage tanks (UST), their contents and associated underground piping to the point where the piping is above the ground, including determining the content types and estimated quantities.

669.02 Equipment. The Contractor shall notify the Engineer of the delivery of all excavation, storage, and transportation equipment to a work area location. The equipment shall comply with OSHA and American Petroleum Institute (API) guidelines and shall be furnished in a clean condition. Clean condition means the equipment does not contain any residual material classified as a non-special waste, non-hazardous special waste, or hazardous waste. Residual materials include, but are not limited to, petroleum products, chemical products, sludges, or any other material present in or on equipment.

Before beginning any associated soil or groundwater management activity, the Contractor shall provide the Engineer with the opportunity to visually inspect and approve the equipment. If the equipment contains any contaminated residual material, decontamination shall be performed on the equipment as appropriate to the regulated substance and degree of contamination present according to OSHA and API guidelines. All cleaning fluids used shall be treated as the contaminant unless laboratory testing proves otherwise.

669.03 Pre-Construction Submittals and Qualifications. Prior to beginning this work, or working in areas with regulated substances, the Contractor shall submit a "Regulated Substances Pre-Construction Plan (RSPCP)" to the Engineer for review and approval using form BDE 2730. The form shall be signed by an Illinois licensed Professional Engineer or Professional Geologist.

As part of the RSPCP, the Contractor(s) or firm(s) performing the work shall meet the following qualifications.

(a) Regulated Substances Monitoring. Qualification for environmental observation and field screening of regulated substances work and environmental observation of UST removal shall require either pre-qualification in Hazardous Waste by the Department or demonstration of acceptable project experience in remediation and operations for contaminated sites in accordance with applicable Federal, State, or local regulatory requirements using BDE 2730. Qualification for each individual performing regulated substances monitoring shall require a minimum of one-year of experience in similar activities as those required for the project.

(b) Underground Storage Tank Removal. Qualification for underground storage tank (UST) removal work shall require licensing and certification with the Office of the State Fire Marshall (OSFM) and possession of all permits required to perform the work. A copy of the permit shall be provided to the Engineer prior to tank removal.

The qualified Contractor(s) or firm(s) shall also document it does not have any current or former ties with any of the properties contained within, adjoining, or potentially affecting the work.

The Engineer will require up to 21 calendar days for review of the RSPCP. The review may involve rejection or revision and resubmittal; in which case, an additional 21 days will be required for each subsequent review. Work shall not commence until the RSPCP has been approved by the Engineer. After approval, the RSPCP shall be revised as necessary to reflect changed conditions in the field and documented using BDE 2730A "Regulated Substances Pre-Construction Plan (RSPCP) Addendum" and submitted to the Engineer for approval.

CONSTRUCTION REQUIREMENTS

669.04 Regulated Substances Monitoring. Regulated substances monitoring includes environmental observation and field screening during regulated substances management activities at the contract specific work areas. As part of the regulated substances monitoring, the monitoring personnel shall perform and document the applicable duties listed on form BDE 2732 "Regulated Substances Monitoring Daily Record (RSMDR)".

- (a) Environmental Observation. Prior to beginning excavation, the Contractor shall mark the limits of the contract specific work areas. Once work begins, the monitoring personnel shall be present on-site continuously during the excavation and loading of material.
- (b) Field Screening. Field screening shall be performed during the excavation and loading of material from the contract specific work areas, except for material classified according to Article 669.05(b)(1) or 669.05(c) where field screening is not required.

Field screening shall be performed with either a photoionization detector (PID) (minimum 10.6eV lamp) or a flame ionization detector (FID), and other equipment as appropriate, to monitor for potential contaminants associated with regulated substances. The PID or FID shall be calibrated on-site, and background level readings taken and recorded daily, and as field and weather conditions change. Field screen readings on the PID or FID in excess of background levels indicates the potential presence of regulated substances requiring handling as a non-special waste, special waste, or hazardous waste. PID or FID readings may be used as the basis of increasing the limits of removal with the approval of the Engineer but shall in no case be used to decrease the limits.

669.05 Regulated Substances Management and Disposal. The management and disposal of soil and/or groundwater containing regulated substances shall be according to the following:

- (a) Soil Analytical Results Exceed Most Stringent MAC. When the soil analytical results indicate detected levels exceed the most stringent maximum allowable concentration (MAC) for chemical constituents in soil established pursuant to Subpart F of 35 III. Adm. Code 1100.605, the soil shall be managed as follows:
 - (1) When analytical results indicate inorganic chemical constituents exceed the most stringent MAC, but still considered within area background levels by the Engineer, the excavated soil can be utilized within the right-of-way as embankment or fill, when suitable. If the soils cannot be utilized within the right-of-way, they shall be managed and disposed of at a landfill as a non-special waste.
 - (2) When analytical results indicate inorganic chemical constituents exceed the most stringent MAC but do not exceed the MAC for a Metropolitan Statistical Area (MSA) County identified in 35 III. Admin. Code 742 Appendix A. Table G, the excavated soil can be utilized within the right-of-way as embankment or fill, when suitable, or managed and disposed of at a clean construction and demolition debris (CCDD) facility or an uncontaminated soil fill operation (USFO) within an MSA County provided the pH of the soil is within the range of 6.25 - 9.0, inclusive.
 - (3) When analytical results indicate chemical constituents exceed the most stringent MAC but do not exceed the MAC for an MSA County excluding Chicago, or the MAC within the Chicago corporate limits, the excavated soil can be utilized within the right-of-way as embankment or fill, when suitable, or managed and disposed of off-site at a CCDD facility or an USFO within an MSA County excluding Chicago or within the Chicago corporate limits provided the pH of the soil is within the range of 6.25 9.0, inclusive.
 - (4) When analytical results indicate chemical constituents exceed the most stringent MAC but do not exceed the MAC for an MSA County excluding Chicago, the excavated soil can be utilized within the right-of-way as embankment or fill, when suitable, or managed and disposed of off-site at a CCDD facility or an USFO within an MSA County excluding Chicago provided the pH of the soil is within the range of 6.25 9.0, inclusive.
 - (5) When the Engineer determines soil cannot be managed according to Articles 669.05(a)(1) through (a)(4) above and the materials do not contain special waste or hazardous waste, as determined by the Engineer, the soil shall be managed and disposed of at a landfill as a non-special waste.
 - (6) When analytical results indicate soil is hazardous by characteristic or listing pursuant to 35 III. Admin. Code 721, contains radiological constituents, or the Engineer otherwise determines the soil cannot be managed according to Articles 669.05(a)(1)

through (a)(5) above, the soil shall be managed and disposed of off-site as a special waste or hazardous waste as applicable.

- (b) Soil Analytical Results Do Not Exceed Most Stringent MAC. When the soil analytical results indicate that detected levels do not exceed the most stringent MAC, the excavated soil can be utilized within the right-of-way as embankment or fill, when suitable, or managed and disposed of off-site according to Article 202.03. However, the excavated soil cannot be taken to a CCDD facility or an USFO for any of the following reasons.
 - (1) The pH of the soil is less than 6.25 or greater than 9.0.
 - (2) The soil exhibited PID or FID readings in excess of background levels.
- (c) Soil Analytical Results Exceed Most Stringent MAC but Do Not Exceed Tiered Approach to Corrective Action Objectives (TACO) Residential. When the soil analytical results indicate that detected levels exceed the most stringent MAC but do not exceed TACO Tier 1 Soil Remediation Objectives for Residential Properties pursuant to 35 III. Admin. Code 742 Appendix B Table A, the excavated soil can be utilized within the right-of-way as embankment or fill, when suitable, or managed and disposed of off-site according to Article 202.03. However, the excavated soil cannot be taken to a CCDD facility or an USFO.
- (d) Groundwater. When groundwater analytical results indicate the detected levels are above Appendix B, Table E of 35 III. Admin. Code 742, the most stringent Tier 1 Groundwater Remediation Objectives for Groundwater Component of the Groundwater Ingestion Route for Class 1 groundwater, the groundwater shall be managed off-site as a special waste or hazardous waste as applicable. Special waste groundwater shall be containerized and trucked to an off-site treatment facility, or may be discharged to a sanitary sewer or combined sewer when permitted by the local sewer authority. Groundwater discharged to a sanitary sewer or combined sewer shall be pre-treated to remove particulates and measured with a calibrated flow meter to comply with applicable discharge limits. A copy of the permit shall be provided to the Engineer prior to discharging groundwater to the sanitary sewer or combined sewer.

Groundwater encountered within trenches may be managed within the trench and allowed to infiltrate back into the ground. If the groundwater cannot be managed within the trench, it may be discharged to a sanitary sewer or combined sewer when permitted by the local sewer authority, or it shall be containerized and trucked to an off-site treatment facility as a special waste or hazardous waste. The Contractor is prohibited from discharging groundwater within the trench through a storm sewer. The Contractor shall install backfill plugs within the area of groundwater contamination.

One backfill plug shall be placed down gradient to the area of groundwater contamination. Backfill plugs shall be installed at intervals not to exceed 50 ft (15 m). Backfill plugs are to be 4 ft (1.2 m) long, measured parallel to the trench, full trench width and depth. Backfill plugs shall not have any fine aggregate bedding or backfill, but shall be entirely cohesive soil or any class of concrete. The Contractor shall provide test data that the material has a permeability of less than 10⁻⁷ cm/sec according to ASTM D 5084, Method A or per another test method approved by the Engineer.

The Contractor shall use due care when transferring contaminated material from the area of origin to the transporter. Should releases of contaminated material to the environment occur (i.e., spillage onto the ground, etc.), the Contractor shall clean-up spilled material and place in the appropriate storage containers as previously specified. Clean-up shall include, but not be limited to, sampling beneath the material staging area to determine complete removal of the spilled material.

The Contractor shall provide engineered barriers, when required, and shall include materials sufficient to completely line excavation surfaces, including sloped surfaces, bottoms, and sidewall faces, within the areas designated for protection.

The Contractor shall obtain all documentation including any permits and/or licenses required to transport the material containing regulated substances to the disposal facility. The Contractor shall coordinate with the Engineer on the completion of all documentation. The Contractor shall make all arrangements for collection and analysis of landfill acceptance testing. The Contractor shall coordinate waste disposal approvals with the disposal facility.

The Contractor shall provide the Engineer with all transport-related documentation within two days of transport or receipt of said document(s). For management of special or hazardous waste, the Contractor shall provide the Engineer with documentation that the Contractor is operating with a valid Illinois special waste transporter permit at least two weeks before transporting the first load of contaminated material.

Transportation and disposal of material classified according to Article 669.05(a)(5) or 669.05(a)(6) shall be completed each day so that none of the material remains on-site by the close of business, except when temporary staging has been approved.

Any waste generated as a special or hazardous waste from a non-fixed facility shall be manifested off-site using the Department's county generator number provided by the Bureau of Design and Environment. An authorized representative of the Department shall sign all manifests for the disposal of the contaminated material and confirm the Contractor's transported volume. Any waste generated as a non-special waste may be managed off-site without a manifest, a special waste transporter, or a generator number.

The Contractor shall select a landfill permitted for disposal of the contaminant within the State of Illinois. The Department will review and approve or reject the facility proposed by the Contractor to use as a landfill. The Contractor shall verify whether the selected disposal facility is compliant with those applicable standards as mandated by their permit and whether the disposal facility is presently, has previously been, or has never been, on the United States Environmental Protection Agency (U.S. EPA) National Priorities List or the Resource Conservation and Recovery Act (RCRA) List of Violating Facilities. The use of a Contractor selected landfill shall in no manner delay the construction schedule or alter the Contractor's responsibilities as set forth.

669.06 Non-Special Waste Certification. An authorized representative of the Department shall sign and date all non-special waste certifications. The Contractor shall be responsible for providing the Engineer with the required information that will allow the Engineer to certify the waste is not a special waste.

- (a) Definition. A waste is considered a non-special waste as long as it is not:
 - (1) a potentially infectious medical waste;
 - (2) a hazardous waste as defined in 35 III. Admin. Code 721;
 - (3) an industrial process waste or pollution control waste that contains liquids, as determined using the paint filter test set forth in subdivision (3)(A) of subsection (m) of 35 III. Admin. Code 811.107;
 - (4) a regulated asbestos-containing waste material, as defined under the National Emission Standards for Hazardous Air Pollutants in 40 CFR Part 61.141;
 - (5) a material containing polychlorinated biphenyls (PCB's) regulated pursuant to 40 CFR Part 761;
 - (6) a material subject to the waste analysis and recordkeeping requirements of 35 III. Admin. Code 728.107 under land disposal restrictions of 35 III. Admin. Code 728;
 - (7) a waste material generated by processing recyclable metals by shredding and required to be managed as a special waste under Section 22.29 of the Environmental Protection Act; or
 - (8) an empty portable device or container in which a special or hazardous waste has been stored, transported, treated, disposed of, or otherwise handled.
- (b) Certification Information. All information used to determine the waste is not a special waste shall be attached to the certification. The information shall include but not be limited to:
 - (1) the means by which the generator has determined the waste is not a hazardous waste;
 - (2) the means by which the generator has determined the waste is not a liquid;
 - (3) if the waste undergoes testing, the analytic results obtained from testing, signed and dated by the person responsible for completing the analysis;
 - (4) if the waste does not undergo testing, an explanation as to why no testing is needed;

- (5) a description of the process generating the waste; and
- (6) relevant material safety data sheets.

669.07 Temporary Staging. Soil classified according to Articles 669.05(a)(2), (b)(1), or (c) may be temporarily staged at the Contractor's option. Soil classified according to Articles 669.05(a)(1), (a)(3), (a)(4), (a)(5), (a)(6), or (b)(2) shall be managed and disposed of without temporary staging to the greatest extent practicable. If circumstances beyond the Contractor's control require temporary staging of these latter materials, the Contractor shall request approval from the Engineer in writing.

Temporary staging shall be accomplished within the right-of-way and the Contractor's means and methods shall be described in the approved or amended RSPCP. Staging areas shall not be located within 200 feet (61 m) of a public or private water supply well; nor within 100 feet (30 m) of sensitive environmental receptor areas, including wetlands, rivers, streams, lakes, or designated habitat zones.

The method of staging shall consist of containerization or stockpiling as applicable for the type, classification, and physical state (i.e., liquid, solid, semisolid) of the material. Materials of different classifications shall be staged separately with no mixing or co-mingling.

When containers are used, the containers and their contents shall remain intact and inaccessible to unauthorized persons until the manner of disposal is determined. The Contractor shall be responsible for all activities associated with the storage containers including, but not limited to, the procurement, transport, and labeling of the containers. The Contractor shall not use a storage container if visual inspection of the container reveals the presence of free liquids or other substances that could cause the waste to be reclassified as a hazardous or special waste.

When stockpiles are used, they shall be covered with a minimum 20-mil plastic sheeting or tarps secured using weights or tie-downs. Perimeter berms or diversionary trenches shall be provided to contain and collect for disposal any water that drains from the soil. Stockpiles shall be managed to prevent or reduce potential dust generation.

When staging non-special waste, special waste, or hazardous waste, the following additional requirements shall apply:

- (a) Non-Special Waste. When stockpiling soil classified according to Article 669.05(a)(1) or 669.05(a)(5), an impermeable surface barrier between the materials and the ground surface shall be installed. The impermeable barrier shall consist of a minimum 20-mil plastic liner material and the surface of the stockpile area shall be clean and free of debris prior to placement of the liner. Measures shall also be taken to limit or discourage access to the staging area.
- (b) Special Waste and Hazardous Waste. Soil classified according to Article 669.05(a)(6) shall not be stockpiled but shall be containerized immediately upon generation in containers, tanks or containment buildings as defined by RCRA, Toxic Substances Control

Act (TSCA), and other applicable State or local regulations and requirements, including 35 III. Admin. Code Part 722, Standards Applicable to Generators of Hazardous Waste.

The staging area(s) shall be enclosed (by a fence or other structure) to restrict direct access to the area, and all required regulatory identification signs applicable to a staging area containing special waste or hazardous waste shall be deployed.

Storage containers shall be placed on an all-weather gravel-packed, asphalt, or concrete surface. Containers shall be in good condition and free of leaks, large dents, or severe rusting, which may compromise containment integrity. Containers must be constructed of, or lined with, materials that will not react or be otherwise incompatible with the hazardous or special waste contents. Containers used to store liquids shall not be filled more than 80 percent of the rated capacity. Incompatible wastes shall not be placed in the same container or comingled.

All containers shall be legibly labeled and marked using pre-printed labels and permanent marker in accordance with applicable regulations, clearly showing the date of waste generation, location and/or area of waste generation, and type of waste. The Contractor shall place these identifying markings on an exterior side surface of the container.

Storage containers shall be kept closed, and storage pads covered, except when access is needed by authorized personnel.

Special waste and hazardous waste shall be transported and disposed within 90 days from the date of generation.

669.08 Underground Storage Tank Removal. For the purposes of this section, an underground storage tank (UST) includes the underground storage tank, piping, electrical controls, pump island, vent pipes and appurtenances.

Prior to removing an UST, the Engineer shall determine whether the Department is considered an "owner" or "operator" of the UST as defined by the UST regulations (41 III. Adm. Code Part 176). Ownership of the UST refers to the Department's owning title to the UST during storage, use or dispensing of regulated substances. The Department may be considered an "operator" of the UST if it has control of, or has responsibility for, the daily operation of the UST. The Department may however voluntarily undertake actions to remove an UST from the ground without being deemed an "operator" of the UST.

In the event the Department is deemed not to be the "owner" or "operator" of the UST, the OSFM removal permit shall reflect who was the past "owner" or "operator" of the UST. If the "owner" or "operator" cannot be determined from past UST registration documents from OSFM, then the OSFM removal permit will state the "owner" or "operator" of the UST is the Department. The Department's Office of Chief Counsel (OCC) will review all UST removal permits prior to submitting any removal permit to the OSFM. If the Department is not the "owner" or "operator" of the UST then it will not register the UST or pay any registration fee.

The Contractor shall be responsible for obtaining permits required for removing the UST, notification to the OSFM, using an OSFM certified tank contractor, removal and disposal of the UST and its contents, and preparation and submittal of the OSFM Site Assessment Report in accordance with 41 III. Admin. Code Part 176.330.

The Contractor shall contact the Engineer and the OSFM's office at least 72 hours prior to removal to confirm the OSFM inspector's presence during the UST removal. Removal, transport, and disposal of the UST shall be according to the applicable portions of the latest revision of the "American Petroleum Institute (API) Recommended Practice 1604".

The Contractor shall collect and analyze tank content (sludge) for disposal purposes. The Contractor shall remove as much of the regulated substance from the UST system as necessary to prevent further release into the environment. All contents within the tank shall be removed, transported and disposed of, or recycled. The tank shall be removed and rendered empty according to IEPA definition.

The Contractor shall collect soil samples from the bottom and sidewalls of the excavated area in accordance with 35 III. Admin. Code Part 734.210(h) after the required backfill has been removed during the initial response action, to determine the level of contamination remaining in the ground, regardless if a release is confirmed or not by the OSFM on-site inspector.

In the event the UST is designated a leaking underground storage tank (LUST) by the OSFM's inspector, or confirmation by analytical results, the Contractor shall notify the Engineer and the District Environmental Studies Unit (DESU). Upon confirmation of a release of contaminants and notifications to the Engineer and DESU, the Contractor shall report the release to the Illinois Emergency Management Agency (IEMA) (e.g., by telephone or electronic mail) and provide them with whatever information is available ("owner" or "operator" shall be stated as the past registered "owner" or "operator", or the IDOT District in which the tank is located and the DESU Manager).

The Contractor shall perform the following initial response actions if a release is indicated by the OSFM inspector:

- (a) Take immediate action to prevent any further release of the regulated substance to the environment, which may include removing, at the Engineer's discretion, and disposing of up to 4 ft (1.2 m) of the contaminated material, as measured from the outside dimension of the tank;
- (b) Identify and mitigate fire, explosion and vapor hazards;
- (c) Visually inspect any above ground releases or exposed below ground releases and prevent further migration of the released substance into surrounding soils and groundwater; and
- (d) Continue to monitor and mitigate any additional fire and safety hazards posed by vapors and free product that have migrated from the tank excavation zone and entered into subsurface structures (such as sewers or basements).

The tank excavation shall be backfilled according to applicable portions of Sections 205, 208, and 550 with a material that will compact and develop stability. All uncontaminated concrete and soil removed during tank extraction may be used to backfill the excavation, at the discretion of the Engineer.

After backfilling the excavation, the site shall be graded and cleaned.

669.09 Regulated Substances Final Construction Report. Not later than 90 days after completing this work, the Contractor shall submit a "Regulated Substances Final Construction Report (RSFCR)" to the Engineer using form BDE 2733 and required attachments. The form shall be signed by an Illinois licensed Professional Engineer or Professional Geologist.

669.10 Method of Measurement. Non-special waste, special waste, and hazardous waste soil will be measured for payment according to Article 202.07(b) when performing earth excavation, Article 502.12(b) when excavating for structures, or by computing the volume of the trench using the maximum trench width permitted and the actual depth of the trench.

Groundwater containerized and transported off-site for management, storage, and disposal will be measured for payment in gallons (liters).

Backfill plugs will be measured in cubic yards (cubic meters) in place, except the quantity for which payment will be made shall not exceed the volume of the trench, as computed by using the maximum width of trench permitted by the Specifications and the actual depth of the trench, with a deduction for the volume of the pipe.

Engineered Barriers will be measured for payment in square yards (square meters).

669.11 Basis of Payment. The work of preparing, submitting and administering a Regulated Substances Pre-Construction Plan will be paid for at the contract lump sum price for REGULATED SUBSTANCES PRE-CONSTRUCTION PLAN.

Regulated substances monitoring, including completion of form BDE 2732 for each day of work, will be paid for at the contract unit price per calendar day, or fraction thereof to the nearest 0.5 calendar day, for REGULATED SUBSTANCES MONITORING.

The installation of engineered barriers will be paid for at the contract unit price per square yard (square meter) for ENGINEERED BARRIER.

The work of UST removal, soil excavation, soil and content sampling, the management of excavated soil and UST content, and UST disposal, will be paid for at the contract unit price per each for UNDERGROUND STORAGE TANK REMOVAL.

The transportation and disposal of soil and other materials from an excavation determined to be contaminated will be paid for at the contract unit price per cubic yard (cubic meter) for

NON-SPECIAL WASTE DISPOSAL, SPECIAL WASTE DISPOSAL, or HAZARDOUS WASTE DISPOSAL.

The transportation and disposal of groundwater from an excavation determined to be contaminated will be paid for at the contract unit price per gallon (liter) for SPECIAL WASTE GROUNDWATER DISPOSAL or HAZARDOUS WASTE GROUNDWATER DISPOSAL. When groundwater is discharged to a sanitary or combined sewer by permit, the cost will be paid for according to Article 109.05.

Backfill plugs will be paid for at the contract unit price per cubic yard (cubic meter) for BACKFILL PLUGS.

Payment for temporary staging of soil classified according to Articles 669.05(a)(1), (a)(3), (a)(4), (a)(5), (a)(6), or (b)(2) will be paid for according to Article 109.04. The Department will not be responsible for any additional costs incurred, if mismanagement of the staging area, storage containers, or their contents by the Contractor results in excess cost expenditure for disposal or other material management requirements.

Payment for accumulated stormwater removal and disposal will be according to Article 109.04. Payment will only be allowed if appropriate stormwater and erosion control methods were used.

Payment for decontamination, labor, material, and equipment for monitoring areas beyond the specified areas, with the Engineer's prior written approval, will be according to Article 109.04.

When the waste material for disposal requires sampling for landfill disposal acceptance, the samples shall be analyzed for TCLP VOCs, SVOCs, RCRA metals, pH, ignitability, and paint filter test. The analysis will be paid for at the contract unit price per each for SOIL DISPOSAL ANALYSIS using EPA Methods 1311 (extraction), 8260B for VOCs, 8270C for SVOCs, 6010B and 7470A for RCRA metals, 9045C for pH, 1030 for ignitability, and 9095A for paint filter.

The work of preparing, submitting and administering a Regulated Substances Final Construction Report will be paid for at the contract lump sum price REGULATED SUBSTANCES FINAL CONSTRUCTION REPORT."

SUBCONTRACTOR AND DBE PAYMENT REPORTING (BDE)

Effective: April 2, 2018

Add the following to Section 109 of the Standard Specifications.

"**109.14 Subcontractor and Disadvantaged Business Enterprise Payment Reporting.** The Contractor shall report all payments made to the following parties:

- (a) first tier subcontractors;
- (b) lower tier subcontractors affecting disadvantaged business enterprise (DBE) goal credit;
- (c) material suppliers or trucking firms that are part of the Contractor's submitted DBE utilization plan.

The report shall be made through the Department's on-line subcontractor payment reporting system within 21 days of making the payment."

SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)

Effective: November 2, 2017 Revised: April 1, 2019

Replace the second paragraph of Article 109.12 of the Standard Specifications with the following:

"This mobilization payment shall be made at least seven days prior to the subcontractor starting work. The amount paid shall be at the following percentage of the amount of the subcontract reported on form BC 260A submitted for the approval of the subcontractor's work.

Value of Subcontract Reported on Form BC 260A	Mobilization Percentage
Less than \$10,000	25%
\$10,000 to less than \$20,000	20%
\$20,000 to less than \$40,000	18%
\$40,000 to less than \$60,000	16%
\$60,000 to less than \$80,000	14%
\$80,000 to less than \$100,000	12%
\$100,000 to less than \$250,000	10%
\$250,000 to less than \$500,000	9%
\$500,000 to \$750,000	8%
Over \$750,000	7%"

TRAFFIC CONTROL DEVICES - CONES (BDE)

Effective: January 1, 2019

Revise Article 701.15(a) of the Standard Specifications to read:

"(a) Cones. Cones are used to channelize traffic. Cones used to channelize traffic at night shall be reflectorized; however, cones shall not be used in nighttime lane closure tapers or nighttime lane shifts."

Revise Article 1106.02(b) of the Standard Specifications to read:

"(b) Cones. Cones shall be predominantly orange. Cones used at night that are 28 to 36 in. (700 to 900 mm) in height shall have two white circumferential stripes. If non-reflective spaces are left between the stripes, the spaces shall be no more than 2 in. (50mm) in width. Cones used at night that are taller than 36 in. (900 mm) shall have a minimum of two white and two fluorescent orange alternating, circumferential stripes with the top stripe being fluorescent orange. If non-reflective spaces are left between the stripes, the spaces shall be no more than 3 in. (75 mm) in width.

The minimum weights for the various cone heights shall be 4 lb for 18 in. (2 kg for 450 mm), 7 lb for 28 in. (3 kg for 700 mm), and 10 lb for 36 in. (5 kg for 900 mm) with a minimum of 60 percent of the total weight in the base. Cones taller than 36 in. shall be weighted per the manufacturer's specifications such that they are not moved by wind or passing traffic."

WEEKLY DBE TRUCKING REPORTS (BDE)

Effective: June 2, 2012 Revised: April 2, 2015

 The Contractor shall submit a weekly report of Disadvantaged Business Enterprise (DBE) trucks hired by the Contractor or subcontractors (i.e. not owned by the Contractor or subcontractors)
 that are used for DBE goal credit.

The report shall be submitted to the Engineer on Department form "SBE 723" within ten business days following the reporting period. The reporting period shall be Monday through Sunday for each week reportable trucking activities occur.

Any costs associated with providing weekly DBE trucking reports shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed.

WORK ZONE TRAFFIC CONTROL DEVICES (BDE)

Effective: March 2, 2020

Add the following to Article 701.03 of the Standard Specifications:

"(q) Temporary Sign Supports1106.02"

Revise the third paragraph of Article 701.14 of the Standard Specifications to read:

"For temporary sign supports, the Contractor shall provide a FHWA eligibility letter for each device used on the contract. The letter shall provide information for the set-up and use of the device as well as a detailed drawing of the device. The signs shall be supported within 20 degrees of vertical. Weights used to stabilize signs shall be attached to the sign support per the manufacturer's specifications."

Revise the first paragraph of Article 701.15 of the Standard Specifications to read:

"701.15 Traffic Control Devices. For devices that must meet crashworthiness standards, the Contractor shall provide a manufacturer's self-certification or a FHWA eligibility letter for each Category 1 device and a FHWA eligibility letter for each Category 2 and Category 3 device used on the contract. The self-certification or letter shall provide information for the set-up and use of the device as well as a detailed drawing of the device."

Revise the first six paragraphs of Article 1106.02 of the Standard Specifications to read:

"**1106.02 Devices.** Work zone traffic control devices and combinations of devices shall meet crashworthiness standards for their respective categories. The categories are as follows.

Category 1 includes small, lightweight, channelizing and delineating devices that have been in common use for many years and are known to be crashworthy by crash testing of similar devices or years of demonstrable safe performance. These include cones, tubular markers, plastic drums, and delineators, with no attachments (e.g. lights). Category 1 devices manufactured after December 31, 2019 shall be MASH-16 compliant. Category 1 devices manufactured on or before December 31, 2019, and compliant with NCHRP 350 or MASH 2009, may be used on contracts let before December 31, 2024.

Category 2 includes devices that are not expected to produce significant vehicular velocity change but may otherwise be hazardous. These include vertical panels with lights, barricades, temporary sign supports, and Category 1 devices with attachments (e.g. drums with lights). Category 2 devices manufactured after December 31, 2019 shall be MASH-16 compliant. Category 2 devices manufactured on or before December 31, 2019, and compliant with NCHRP 350 or MASH 2009, may be used on contracts let before December 31, 2024.

Category 3 includes devices that are expected to cause significant velocity changes or other potentially harmful reactions to impacting vehicles. These include crash cushions (impact

attenuators), truck mounted attenuators, and other devices not meeting the definitions of Category 1 or 2. Category 3 devices manufactured after December 31, 2019 shall be MASH-16 compliant. Category 3 devices manufactured on or before December 31, 2019, and compliant with NCHRP 350 or MASH 2009, may be used on contracts let before December 31, 2029. Category 3 devices shall be crash tested for Test Level 3 or the test level specified.

Category 4 includes portable or trailer-mounted devices such as arrow boards, changeable message signs, temporary traffic signals, and area lighting supports. It is preferable for Category 4 devices manufactured after December 31, 2019 to be MASH-16 compliant; however, there are currently no crash tested devices in this category, so it remains exempt from the NCHRP 350 or MASH compliance requirement.

For each type of device, when no more than one MASH-16 compliant is available, an NCHRP 350 or MASH-2009 compliant device may be used, even if manufactured after December 31, 2019."

Revise Articles 1106.02(g), 1106.02(k), and 1106.02(l) to read:

- "(g) Truck Mounted/Trailer Mounted Attenuators. The attenuator shall be approved for use at Test Level 3. Test Level 2 may be used for normal posted speeds less than or equal to 45 mph.
- (k) Temporary Water Filled Barrier. The water filled barrier shall be a lightweight plastic shell designed to accept water ballast and be on the Department's qualified product list.

Shop drawings shall be furnished by the manufacturer and shall indicate the deflection of the barrier as determined by acceptance testing; the configuration of the barrier in that test; and the vehicle weight, velocity, and angle of impact of the deflection test. The Engineer shall be provided one copy of the shop drawings.


(I) Movable Traffic Barrier. The movable traffic barrier shall be on the Department's qualified product list.

Shop drawings shall be furnished by the manufacturer and shall indicate the deflection of the barrier as determined by acceptance testing; the configuration of the barrier in that test; and the vehicle weight, velocity, and angle of impact of the deflection test. The Engineer shall be provided one copy of the shop drawings. The barrier shall be capable of being moved on and off the roadway on a daily basis."

WORKING DAYS (BDE)

Effective: January 1, 2002

The Contractor shall complete the work within 20 working days.

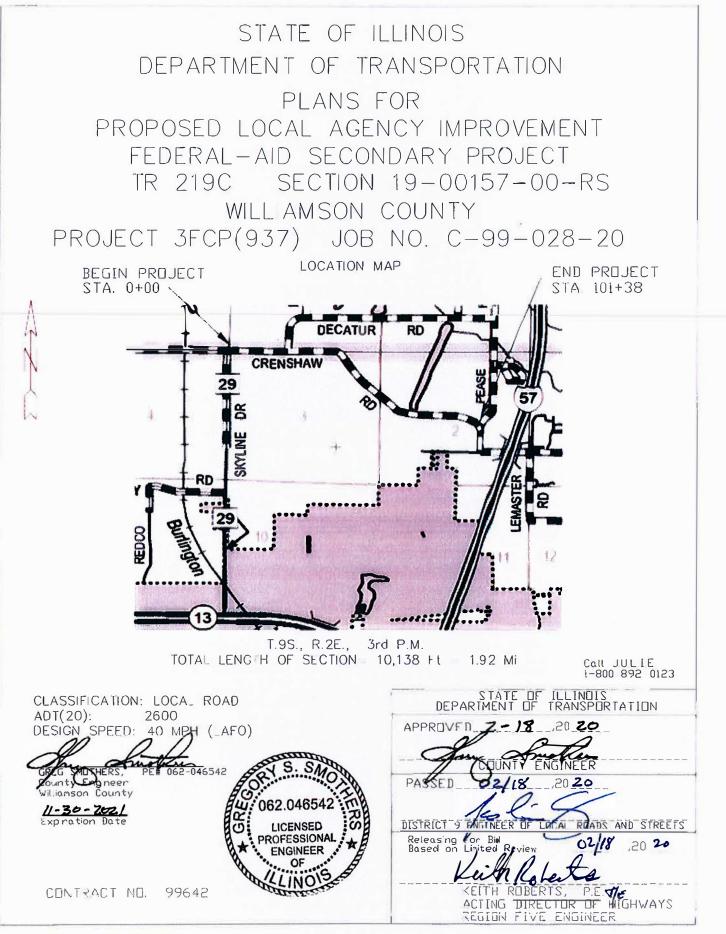

	ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NI
1	TR 219C	19-00157-00-RS	VILLIAMSON	23	5
	FIEL RD.	DIST NO. 7	ILL.PRD.J	3FC2(9:	37)
	CONTRACT NO		9964	12	1 222

INDEX OF SHEETS

SHEET ND.	CONTENTS		
1	COVER SHEET		
2	INDEX OF SHEETS		
3	SUMMARY OF QUANTITIES		
4	PROJECT INFORMATION		
5	TYPICAL SECTION TANGEN		
6	TYPICAL SECTION CURVES		
7	TYPICAL SIDE ROAD RETURNS		
8	TYPICAL PRIVATE ENTRANCE, BUTT JUINTS		
9	CURVE DATA		
10	MAILBOXTURNOUTSTANDARD		
11-19	TRAFFIC CONTROL STANDARDS		
20-23	PAVEMENT MARKING STANDARDS		

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET ND.
TR 2190	19-00157-00-RS	VILLIAMSON	23	3
FED. RD.	DIST. NO. 7	ILC.PRD.J.	3FCP(9)	37>
CONTR	ACT ND.	9964	12	

SUMMARY DF QUANTITIES

Code Number	Item	Unit of Measure	Quantity
40600290	BITUMINOUS MATERIALS(TACK COAT)	POUND	10,200
40600982	HOT-MIX ASPHALT SURFACE REMOVAL-BUTT JOINT	SQ YD	80
40600990	TEMPORARY RAMP	SQ YD	10
40603085	HOT-MIX ASPHALT BINDER COURSE IL-19.0 N70	TON	5600
40604052	HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX"C", N70	TON	2,180
48100100	AGGREGATE SHOULDERS TYPE A	TON	3740
48203100	HOT-MIX ASPHALT SHOULDERS	TON	2030
64200108	SHOULDER RUMBLE STRIPS, 8 INCH	FOOT	19,200
67100100	MOBILIZATION	LSUM	1
70100460	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	LSUM	1
70300100	SHORT TERM PAVEMENT MARKING	FOOT	1850
70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	610
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	40,330
△ 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	40,330
△ 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	130

A SPECIALTY ITEMS

- A	ROUTE NO.	SECTION	CEUNTY	TOTAL SHEETS	SHEET
	TR 2190	19-00157-00-RS	WILLIAMSEN	23	4
	FED. RD. DIST. NO. 7		ILL.PROJ.	3FCP(937)	
9		ACT ND	99642		

PREJECT INFORMATION

LAFD PRDJECT CLASS II RNAD DESIGN PERIOD 15 YEARS STRUCTURAL DESIGN TRAFFIC YEAR 2035 TR 219C P.C 2548 S.U. 27 M.U. 25 2600 ADT PRIVATE ENTRANCES 28 MAILBOX_TURNOUTS

13

SCHEDULE OF NO-PASSING ZONES


0+00 TU 101+38 _T AND RT


INTERSECTIONS

19+89 LI 101+08 LT

HIGHWAY STANDARDS


BLR 24-2 701001-02 701006-05 701011-04 701301-04 701306-04 701311-03 701901-08 780001-05 781001-04

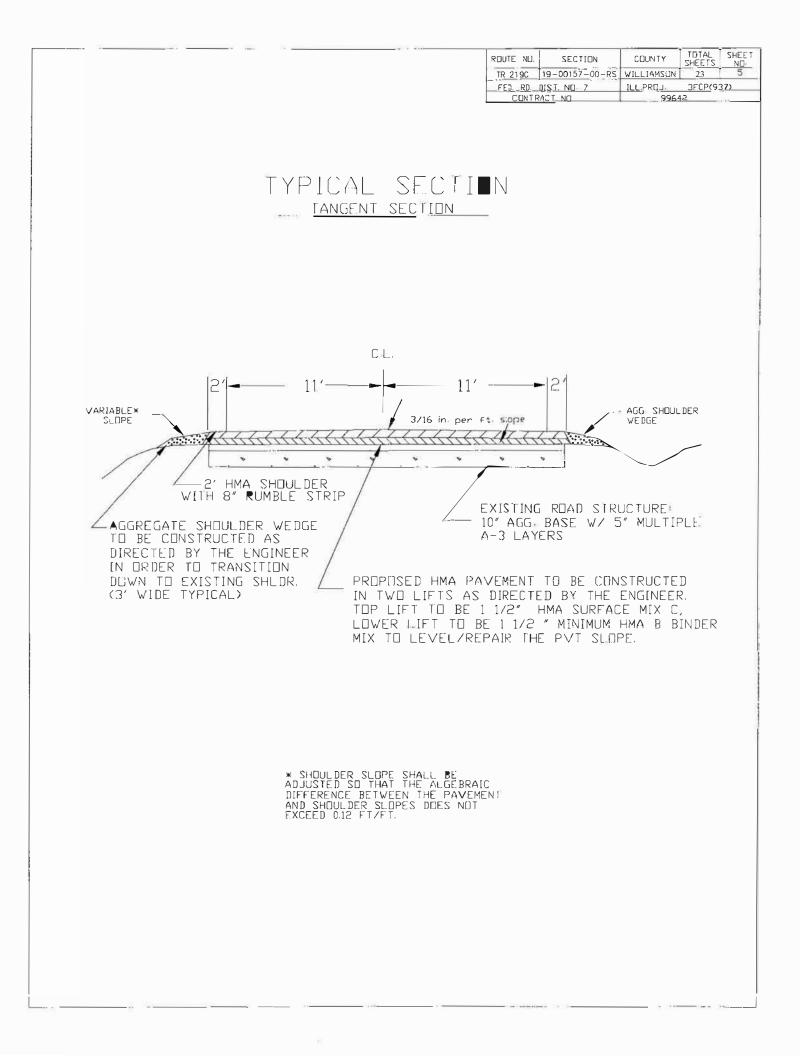


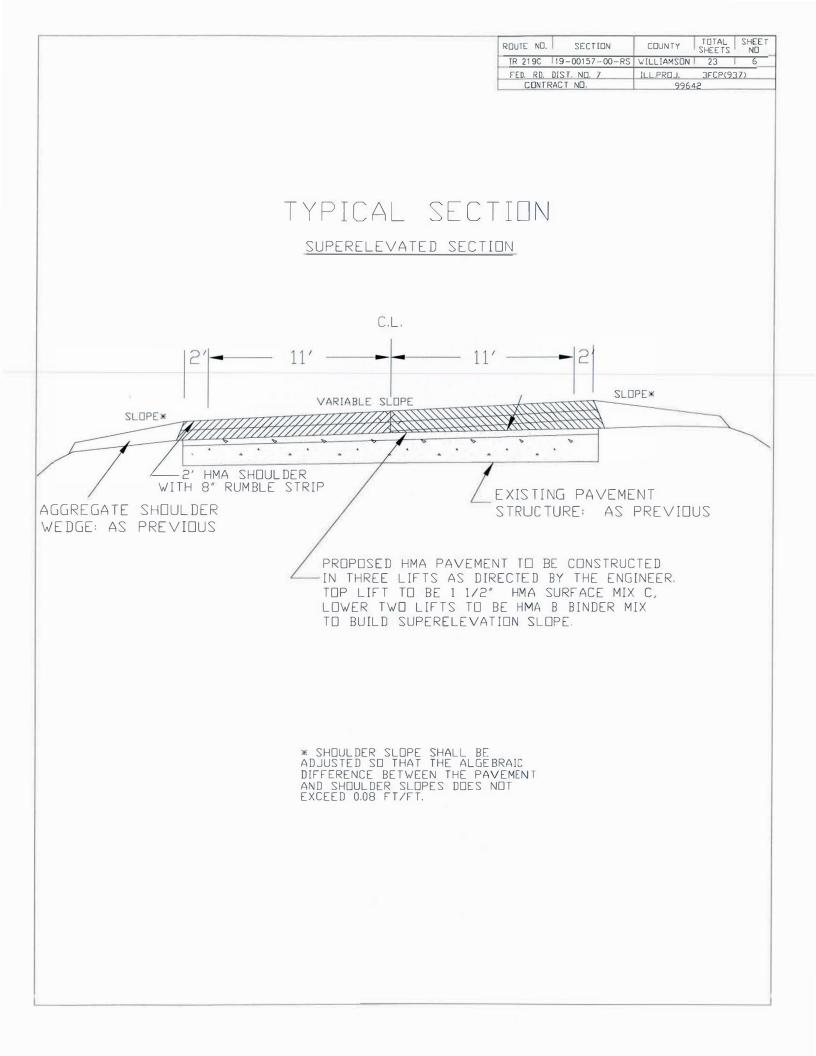

RUUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET ND.
TR 219C	19-00157-00-RS	WILLIAMSON	23	7
FEC. RC.	DIST. NE: 7	ILL.PROJ.	3FCP(937)	
CENTRACT ND		99642		

TYPICAL RETURNS DETAIL OF SIDE ROAD RETURNS

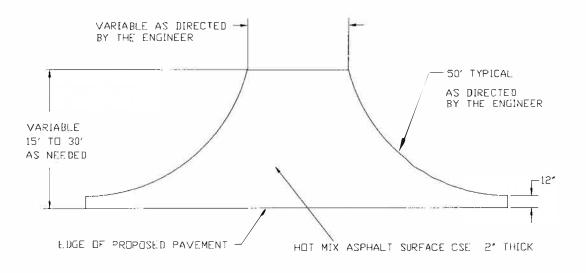

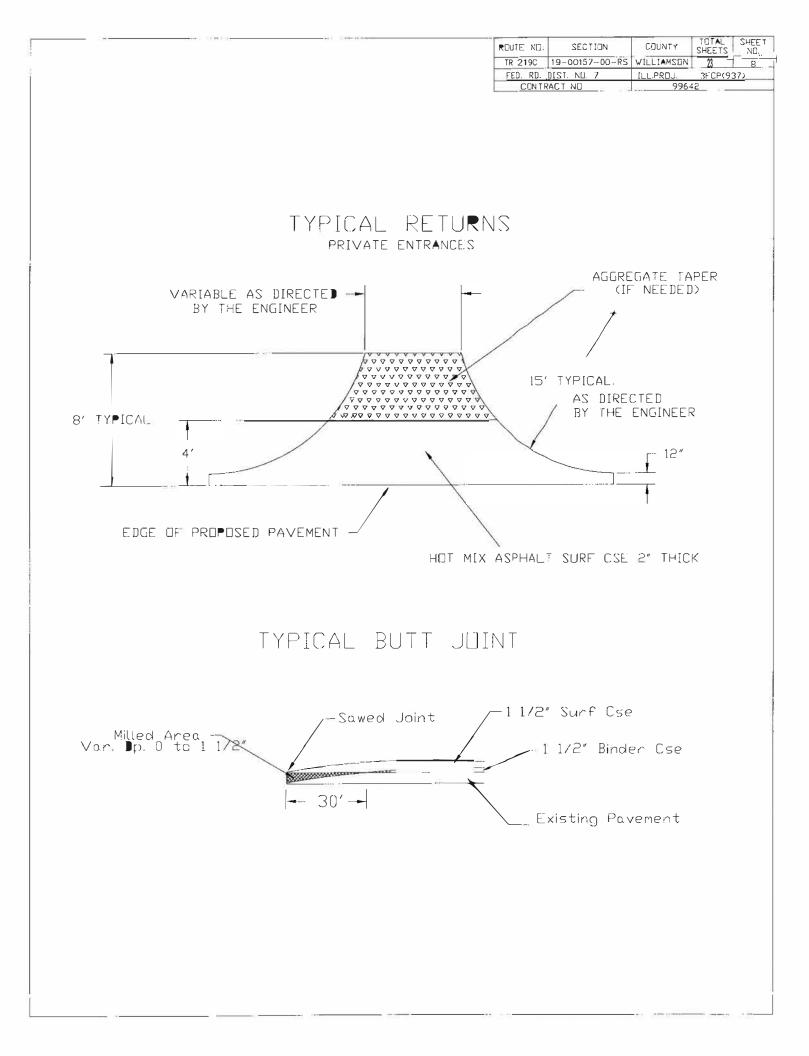

ROUTE NO. SECTION COUNT TR 219C 19-00157-00-RS WILLIAMS FED. RD. DIST. NO. 7 CONTRACT NO. 996	SHEETS ON 23 3FCP(937)	SHEE NO. 9
FED. RD. DIST. NO. 7	3FCP(937)	9
	42	
CURVE DATACURVE #1CURVE #2PC 35+15PC 51+75PT 40+15PT 55+05I = 56DI = 12DDc = 11D12'Dc = 3D38'L = 500 Ft.L = 330 Ft.EXIST. SUPER. 0.016 FT/FTEXIST. SUPER. 0.037 FT/FTPROP. SUPER. 0.08 FT/FTPROP. SUPER. 0.045 FT/FTTRANSITIONSTRANSITIONS33+95 to 35+7450+99 to 52+1239+56 to 41+3554+68 to 55+81		

<u>CURVE #3</u>


PC 68+24 PT 71+24 I = 34D Dc = 11D20' L = 300 Ft. EXIST. SUPER. 0.01 FT/FT PROP. SUPER. 0.08 FT/FT <u>TRANSITIONS</u> 67+04 to 68+83 70+65 to 72+44

CURVE #4

PC 89+32 PT 94+12 I = 23D Dc = 4D47' L = 480 Ft. EXIST. SUPER. 0.000 FT/FT PROP. SUPER. 0.055 FT/FT <u>TRANSITIONS</u> 88+44 to 89+76 93+68 to 95+00


CURVE #5


PC 96+13 PT 101+38 I = 64D Dc = 12D11' L = 525 Ft. EXIST. SUPER. 0.033 FT/FT PROP. SUPER. 0.08 FT/FT <u>TRANSITIONS</u> 94+93 to 96+72 99+59 to 101+38

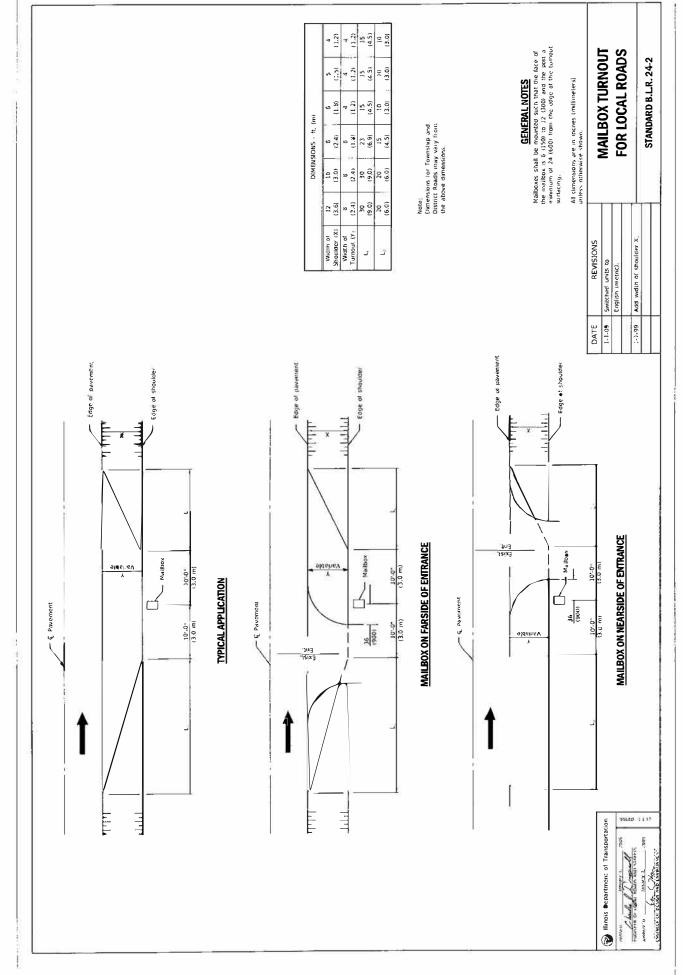


Contract # 99642



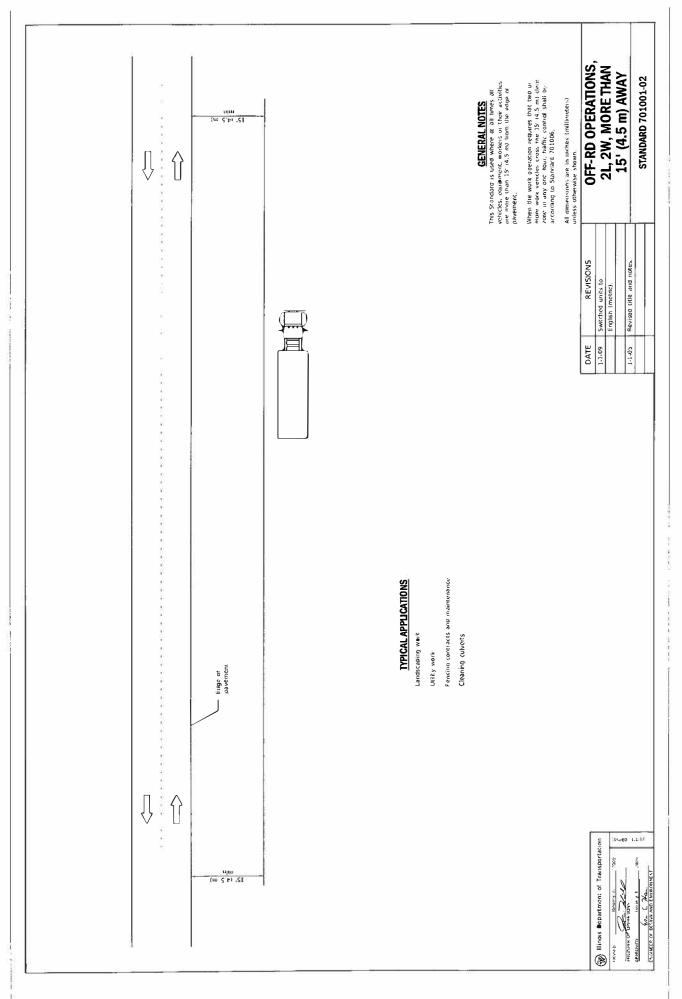


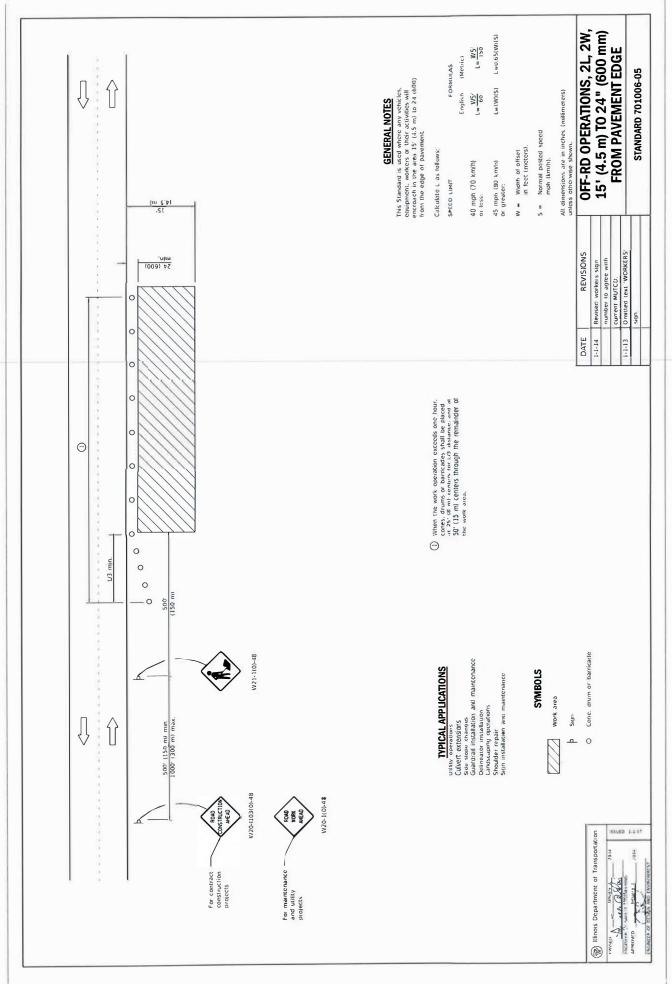

Contract # 99642

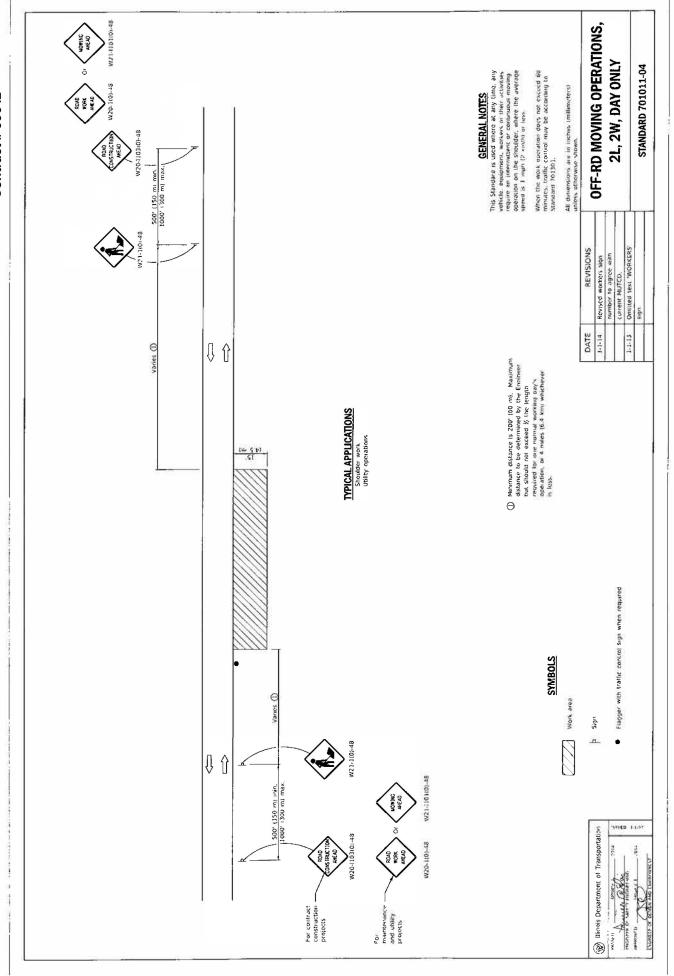



Contract # 99642

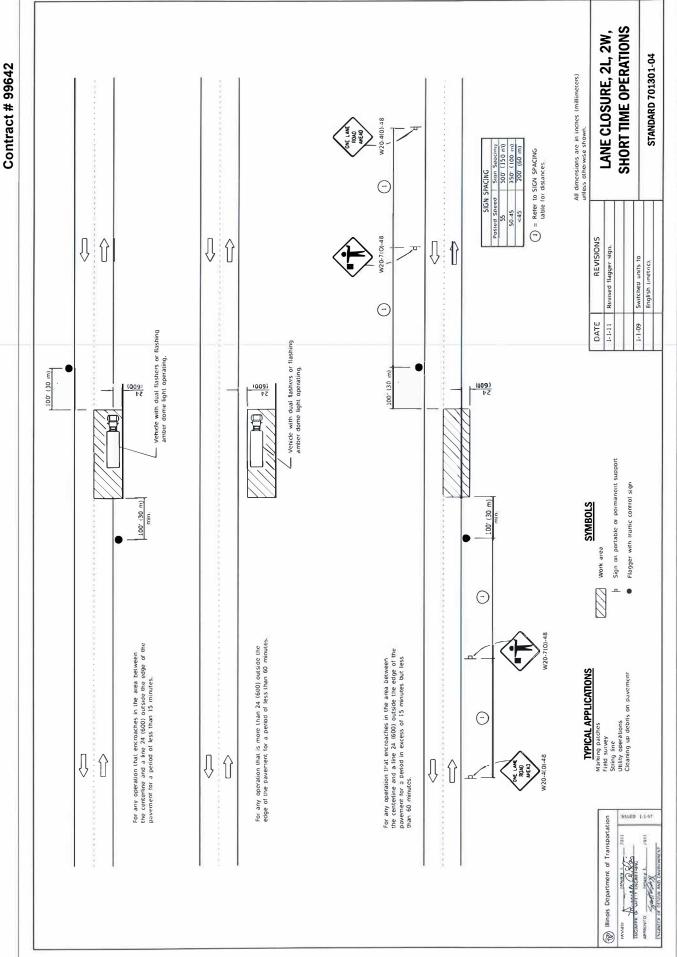






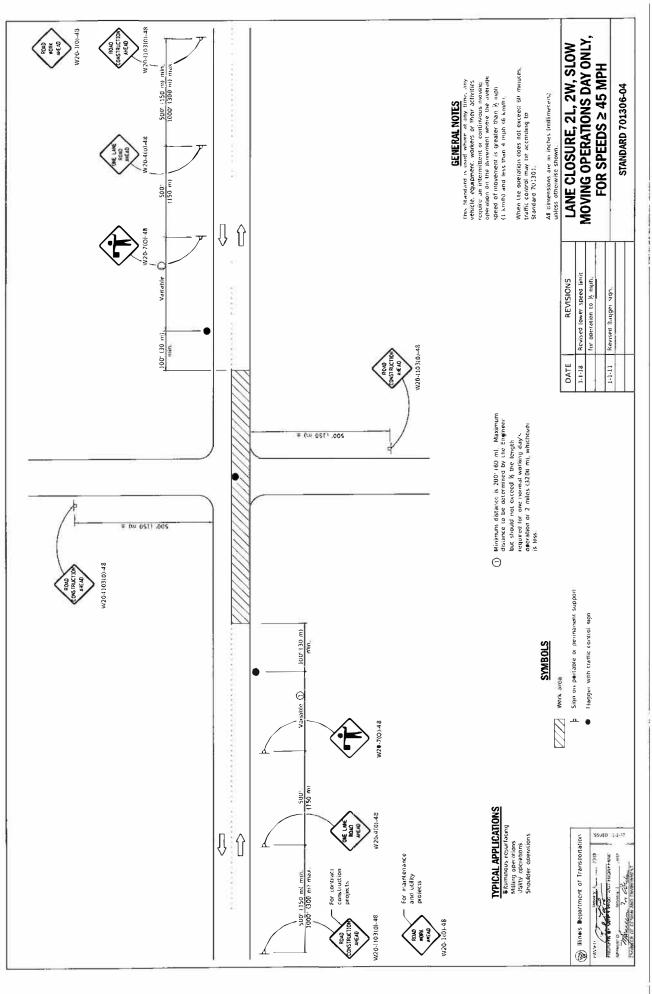


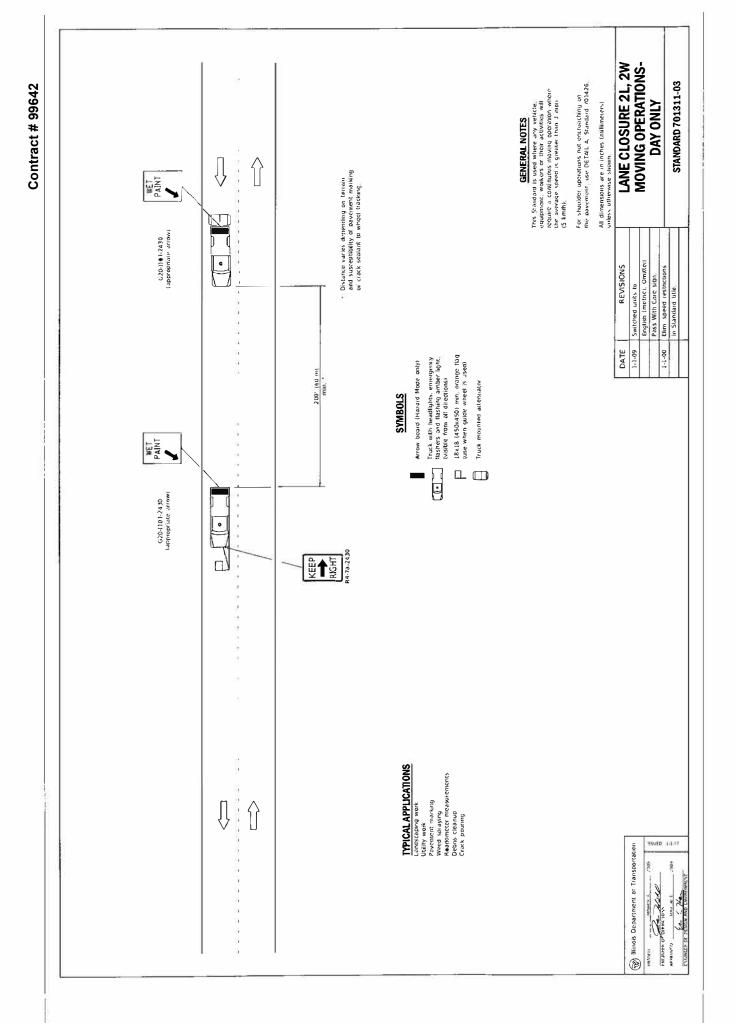




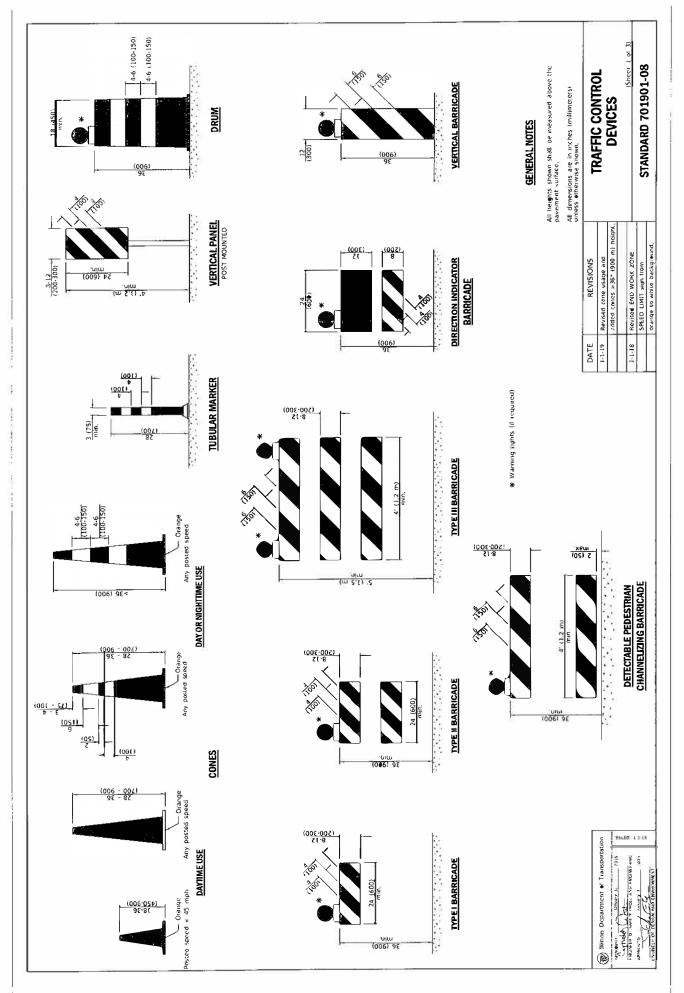




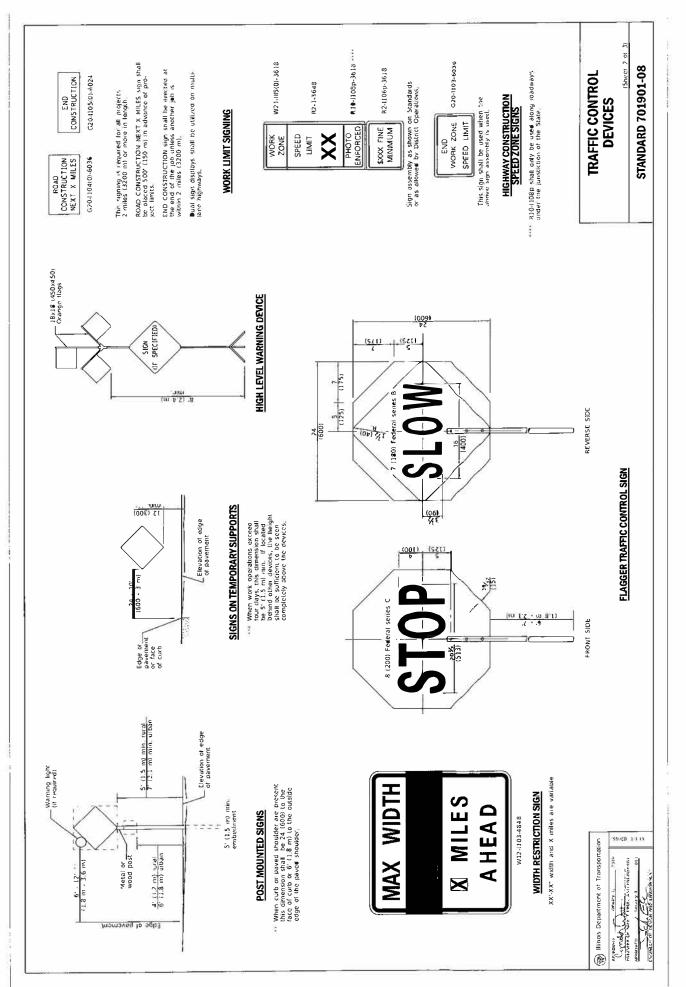

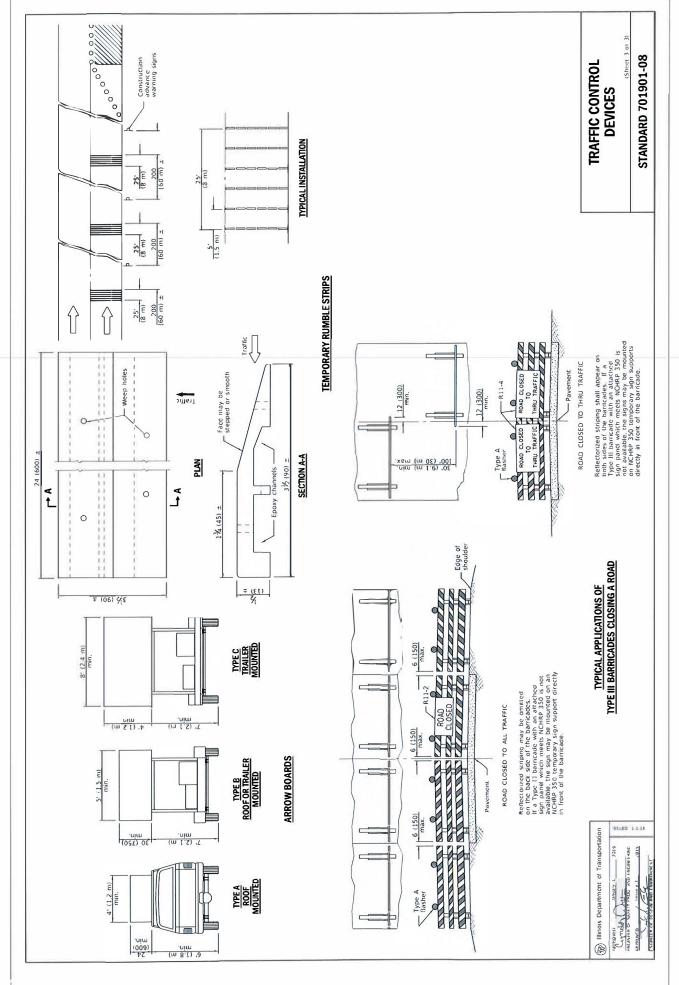


Contract # 99642




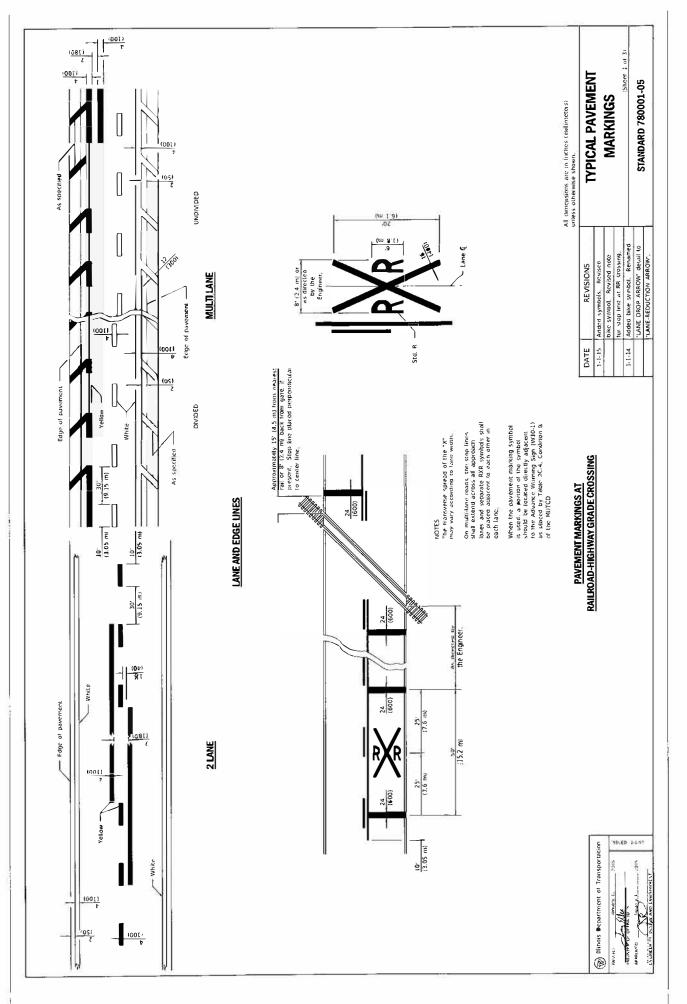




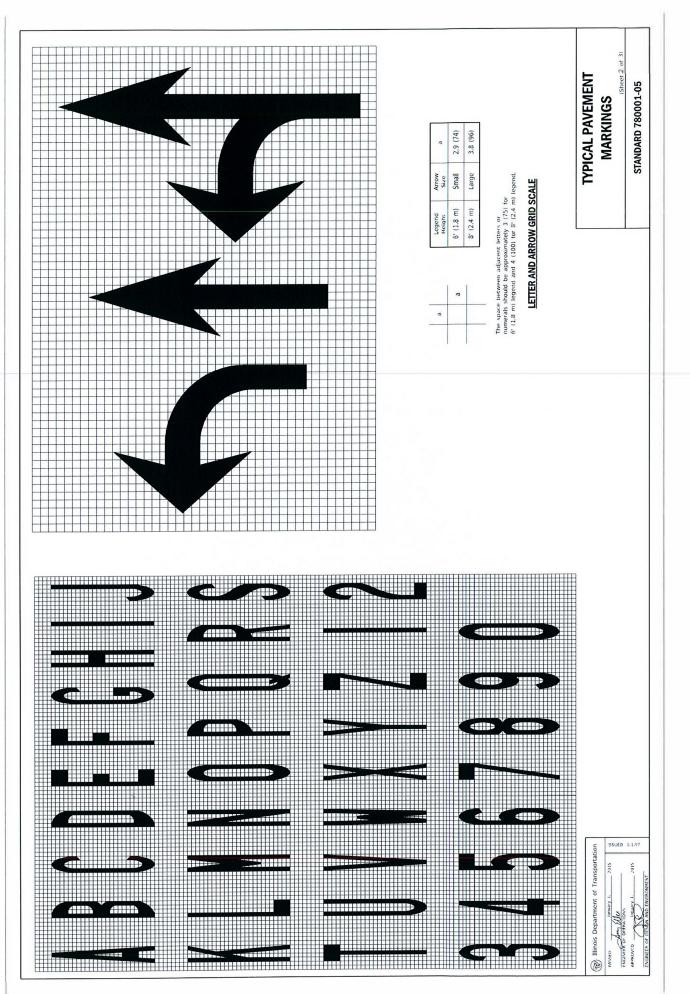



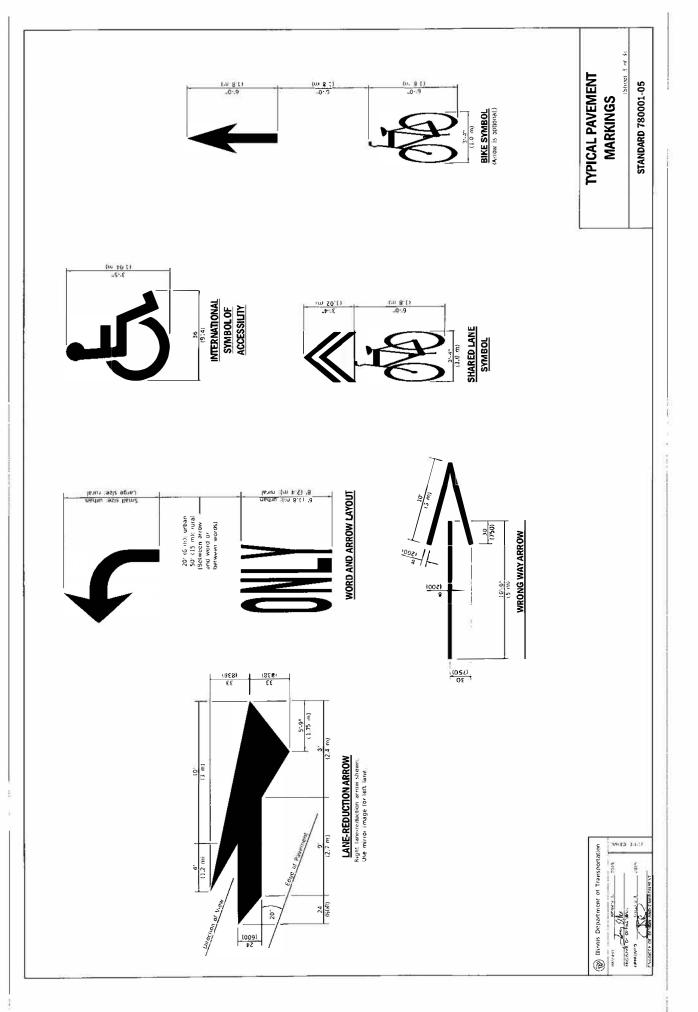

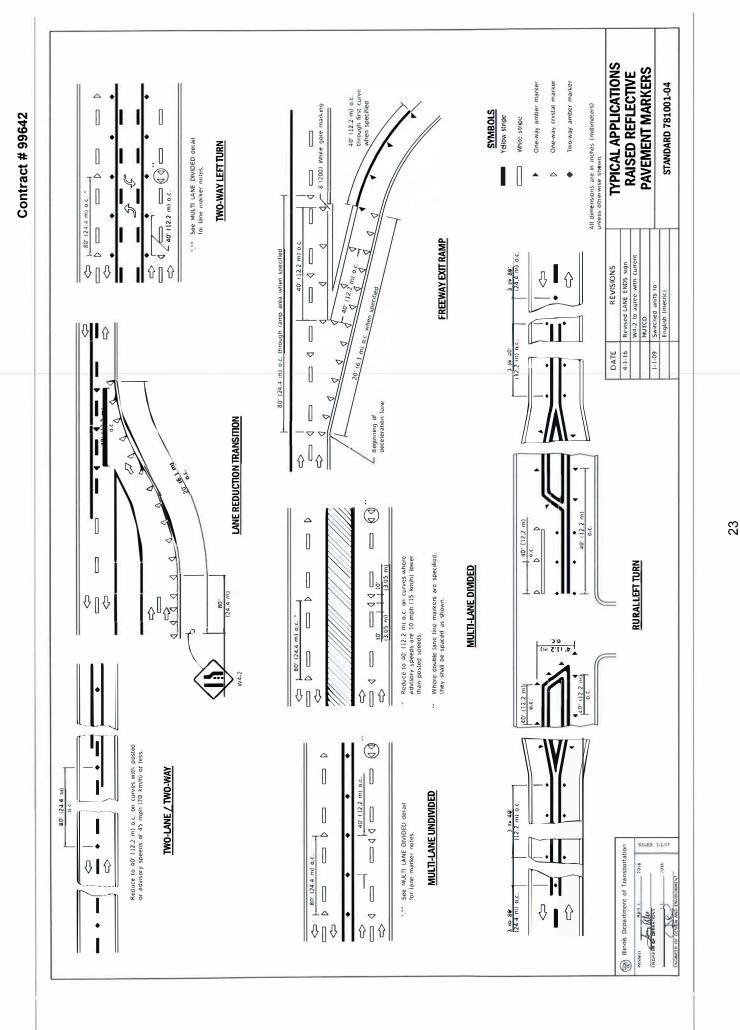

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor

performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

 b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information. d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

 The number and work hours of minority and nonminority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391.

The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-thejob training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federallyassisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under 5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice

performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act. 2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

Contract Provision - Cargo Preference Requirements

In accordance with Title 46 CFR § 381.7 (b), the contractor agrees-

"(1) To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

(2) To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b) (1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

(3) To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract."

Provisions (1) and (2) apply to materials or equipment that are acquired solely for the project. The two provisions do not apply to goods or materials that come into inventories independent of the project, such as shipments of Portland cement, asphalt cement, or aggregates, when industry suppliers and contractors use these materials to replenish existing inventories.

MINIMUM WAGES FOR FEDERAL AND FEDERALLY ASSISTED CONSTRUCTION CONTRACTS

This project is funded, in part, with Federal-aid funds and, as such, is subject to the provisions of the Davis-Bacon Act of March 3, 1931, as amended (46 Sta. 1494, as amended, 40 U.S.C. 276a) and of other Federal statutes referred to in a 29 CFR Part 1, Appendix A, as well as such additional statutes as may from time to time be enacted containing provisions for the payment of wages determined to be prevailing by the Secretary of Labor in accordance with the Davis-Bacon Act and pursuant to the provisions of 29 CFR Part 1. The prevailing rates and fringe benefits shown in the General Wage Determination Decisions issued by the U.S. Department of Labor shall, in accordance with the provisions of the foregoing statutes, constitute the minimum wages payable on Federal and federally assisted construction projects to laborers and mechanics of the specified classes engaged on contract work of the character and in the localities described therein.

General Wage Determination Decisions, modifications and supersedes decisions thereto are to be used in accordance with the provisions of 29 CFR Parts 1 and 5. Accordingly, the applicable decision, together with any modifications issued, must be made a part of every contract for performance of the described work within the geographic area indicated as required by an applicable DBRA Federal prevailing wage law and 29 CFR Part 5. The wage rates and fringe benefits contained in the General Wage Determination Decision shall be the minimum paid by contractors and subcontractors to laborers and mechanics.