


NOTE:
 IF THE ADJUSTMENT EXCEEDS A 24" HEIGHT THE CONE MUST BE REMOVED AND THE BARREL SECTION HAS TO BE ADJUSTED. THIS WORK SHALL BE PAID FOR UNDER ADDITIONAL MASONRY ITEM.

DETAIL OF TYPE I FRAME ADJUSTMENT

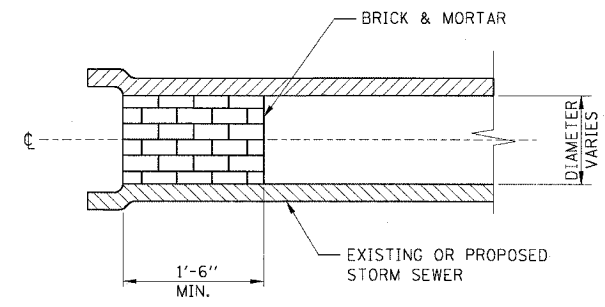

NOTES:

1. THIS WORK CONSISTS OF FURNISHING AND PLACING BRICKS AND MORTAR AS SHOWN AND AS DIRECTED BY THE ENGINEER AT LOCATIONS SHOWN IN THE PLANS TO PLUG STORM SEWERS.
2. THIS WORK SHALL BE CONSIDERED AS INCLUDED IN THE CONTRACT UNIT PRICE BID FOR THE STORM SEWER ITEMS.

STORM SEWER PLUG DETAIL

REVISIONS	
NAME	DATE