
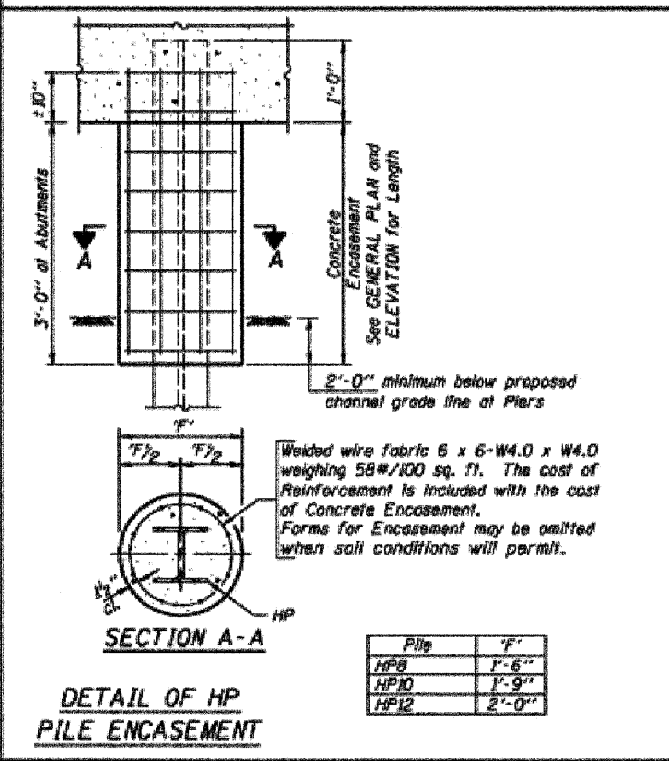


SHEET 12 OF 12
SECTION 04-14106-00-BR
CONTRACT NO. 95544
Reinforcement cage shall be omitted when Concrete Encasement is provided.

The cost of Reinforcement is included with the Cost of Furnishing Piles.

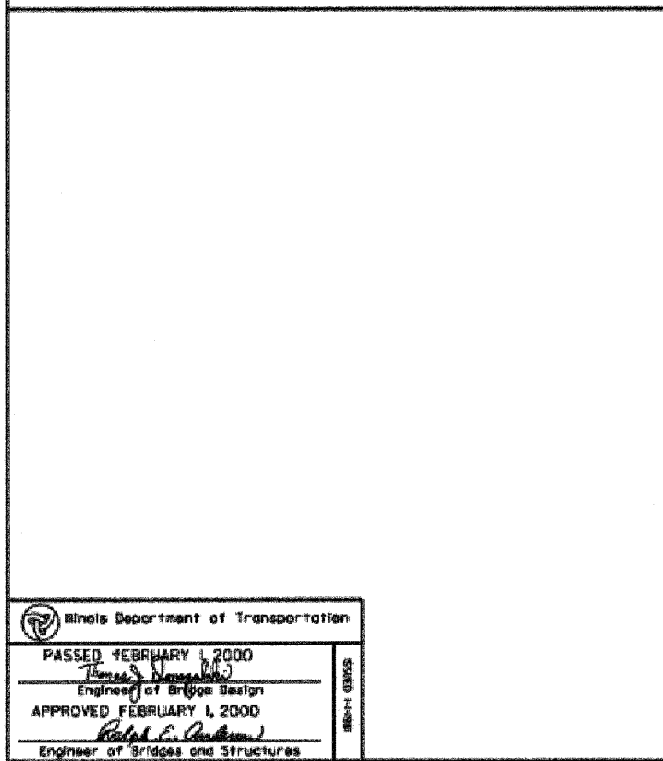

QUANTITIES/FT. OF ENCASEMENT (STEEL PILES)

Pile Size	Item	Quantity
HP8	Concrete Encasement	0.063 C.Y.
HP10	Concrete Encasement	0.086 C.Y.
HP12	Concrete Encasement	0.112 C.Y.

(METAL SHELL PILES)

Pile Size	Item	Quantity
12" Dia.	Concrete Encasement	0.087 C.Y.

FILE DETAILS

STANDARD CX-1

Illinois Department of Transportation
PASSED FEBRUARY 1, 2000
Engineer of Bridge Design
APPROVED FEBRUARY 1, 2000
Engineer of Bridges and Structures