
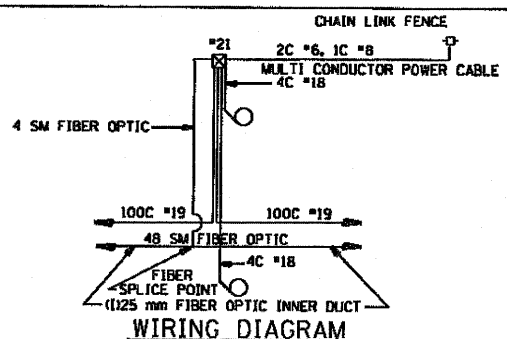


F.A.A. RYE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
35	606	JEFF.	104	104
STA. _____	TO STA. _____			
FED. ROAD DIST. NO. _____		ILLINOIS FED. AID PROJECT		

GPS 47 48.095 41.8016
87 47.503 87.7917

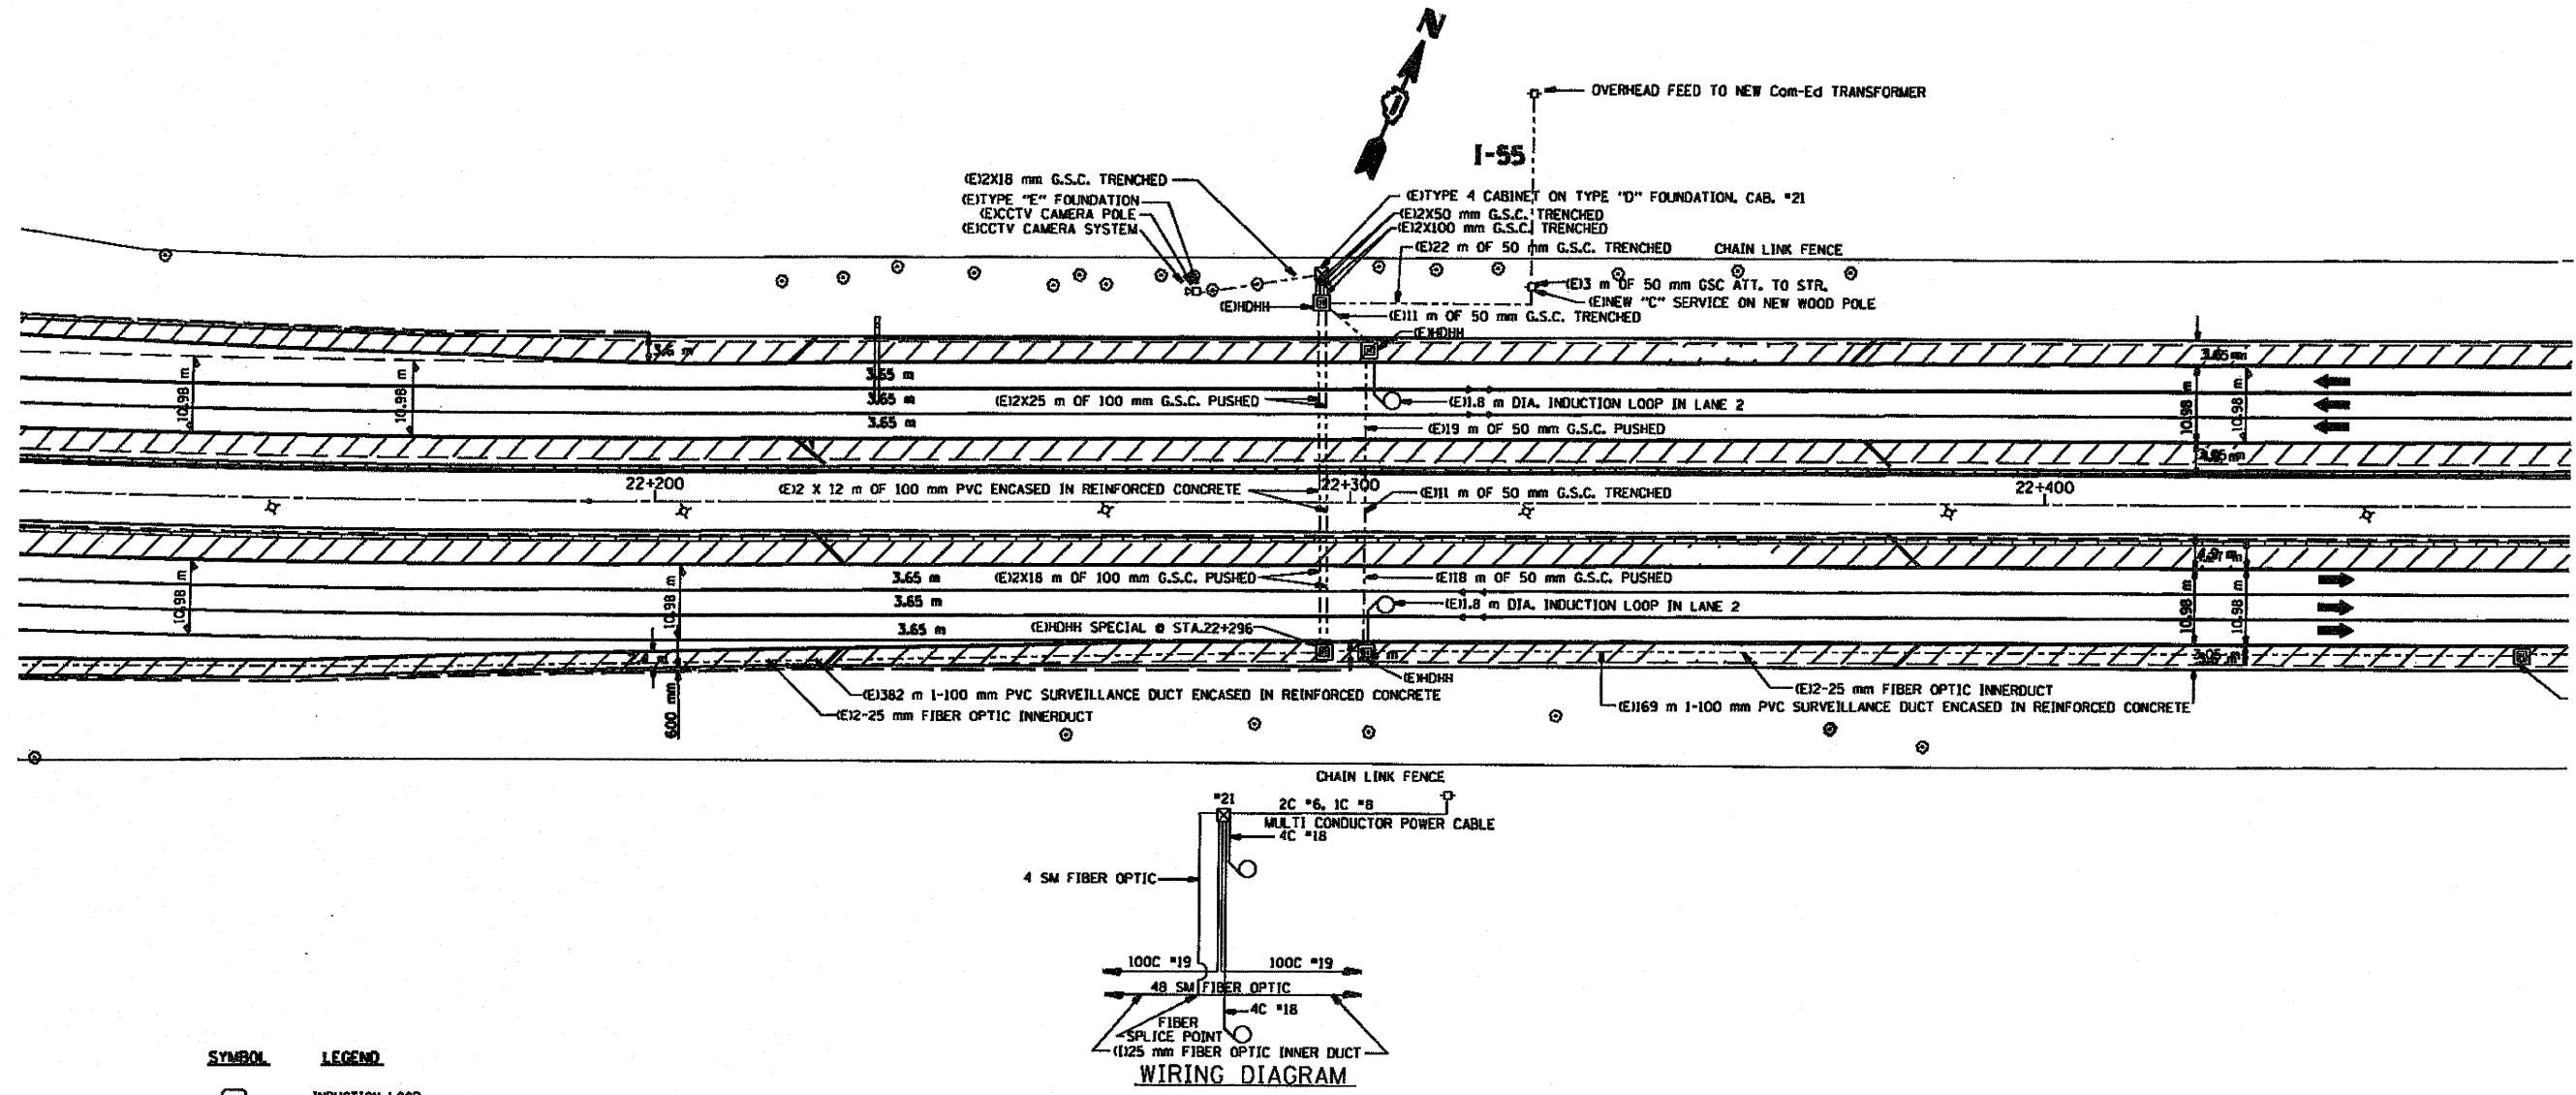

SYMBOL	LEGEND
[Square]	INDUCTION LOOP
[Circle]	ROUND INDUCTION LOOP
[Square with X]	TSC CABINET
[Circle with X]	TELEPHONE SERVICE
[Square with dot]	SERVICE INSTALLATION
[Square with diagonal line]	JUNCTION BOX
[Square with heavy line]	HEAVY DUTY HAND HOLE
[Dashed line]	POLYETHYLENE DUCT
[Line with dots]	GALVANIZED STEEL CONDUIT
(E)	EXISTING
(P)	PROPOSED
(I)	INSTALL
(R)	REMOVE

- NOTES:**
- CONTACT TSC ENGINEER PRIOR TO REMOVAL OF EXISTING CABINETS (708524-2145).
 - 100C #19 TELECOMMUNICATION CABLE SHALL ONLY BE SPLICED IN BARRIER WALL JUNCTION BOXES OR IN SURVEILLANCE CABINETS. IN AREAS WHERE CONDUITS RUN THROUGH EB RIGHT SHOULDER AND HEAVY DUTY HAND HOLE SPECIALS 100C #19 CABLES SHALL BE PULLED CONTINUOUS FROM CABINET TO CABINET, NO SPLICES WILL BE ALLOWED IN HAND HOLES.
 - 48 SM FIBER OPTIC CABLE SHALL BE ORDERED AND PULLED IN MAXIMUM CABLE LENGTHS, ONLY SELECTIVE MIDSPAN CABLE SPLICES SHALL BE ALLOWED BETWEEN 48 SM FIBER AND 4 SM FIBER CABLES.
 - FINAL CCTV LOCATIONS SHALL BE DETERMINED BY BUCKET SURVEY. LOCATIONS SHOWN ON PLANS ARE FOR INFORMATION ONLY. FINAL LOCATIONS MAY VARY FROM LOCATIONS SHOWN.
 - CABINET FOUNDATION/HDDH CABINET PAD SHALL BE A MONOLITHIC POUR.
 - CONTRACTOR SHALL CONTACT TSC ENGINEER PRIOR TO INDUCTION LOOP REPLACEMENT (708524-2145).
 - WHERE 100 mm PVC ENCASED IN REINFORCED CONCRETE CROSSES MEDIAN, CONDUIT ENCASEMENT SHALL BE 1m (36") DEPTH MINIMUM.
 - HEAVY DUTY HAND HOLE SPECIALS SHALL BE INSTALLED PER PLAN AND AT 365 m (1200') INTERVALS MINIMUM.

FOR INFORMATION ONLY

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION TRAFFIC SYSTEMS CENTER
NAME	DATE	
		<p style="font-size: 2em; font-weight: bold;">20</p> <p>SCALE: 1:500</p> <p>DATE 3-99</p> <p>DRAWN BY GJM CHECKED BY DL</p>

ROAD PROJECTS TSC 5808R-4E, METSHEE1.DGN
BY: P27680ADJ.DGN