

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
**PLANS FOR PROPOSED
FEDERAL AID HIGHWAY**

F. A. DIST.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	1
STA. 10+38		TO STA. 69+61.00		
FED. ROAD DIST. NO. 1		ILLINOIS	FED. AID PROJECT M-4003(426)	

CONTRACT #61C51


INDEX OF SHEETS

1. COVER SHEET, INDEX OF SHEETS & STATE STANDARDS
2. GENERAL NOTES
3. SUMMARY OF QUANTITIES
4. TYPICAL SECTIONS
- 5.-7. PAVEMENT PLAN
- 8.-10. PAVEMENT MARKING & SIGNAGE PLAN
- 11.-19. IDOT DISTRICT 1 STANDARD DETAILS
- 20.-21. REFERENCE SHEETS



HIGHWAY STANDARDS

- | | |
|-----------|---|
| 000001-06 | STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS |
| 424001-08 | PERPENDICULAR CURB RAMPS |
| 442201-03 | CLASS C AND D PATCHES |
| 606001-06 | CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER |
| 701301-04 | LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS |
| 701501-06 | URBAN LANE CLOSURE, 2L,2W, UNDIVIDED |
| 701801-06 | SIDEWALK, CORNER OR CROSSWALK CLOSURE |
| 701901-05 | TRAFFIC CONTROL DEVICES |
| 720006-04 | SIGN PANEL ERECTION DETAILS |
| 729001-01 | APPLICATIONS OF TYPES A&B METAL POSTS (FOR SIGNS & MARKERS) |
| 780001-05 | TYPICAL PAVEMENT MARKINGS |
| 886001-01 | DETECTOR LOOP INSTALLATIONS |
| 886006-01 | TYPICAL LAYOUTS FOR DETECTION LOOPS |

**FAU 2403 (KOSTNER AVENUE)
127TH STREET TO 119TH STREET
ROAD RESURFACING
SECTION NO.: 14-00097-00-RS
PROJECT NO.: M-4003(426)
VILLAGE of ALSIP
COOK COUNTY
JOB NO.: C-91-145-15**

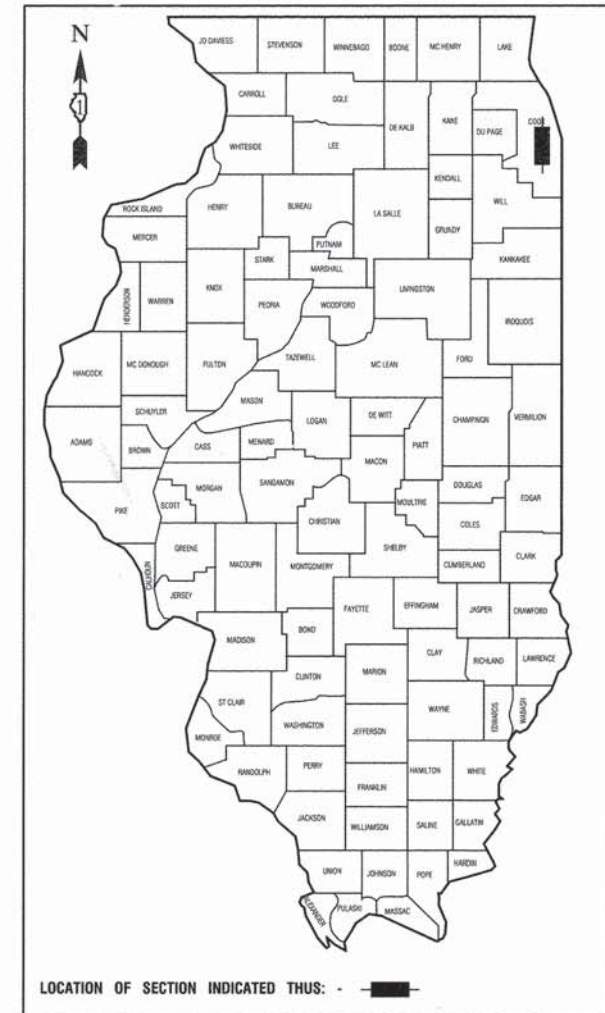

KOSTNER AVENUE	
2016 ADT -	3,150
2040 ADT -	4,000
POSTED SPEED LIMIT -	25 mph
DESIGN PERIOD -	20 YEARS
DESIGN SPEED LIMIT -	30 mph
STREET CLASSIFICATION -	LOCAL COLLECTOR

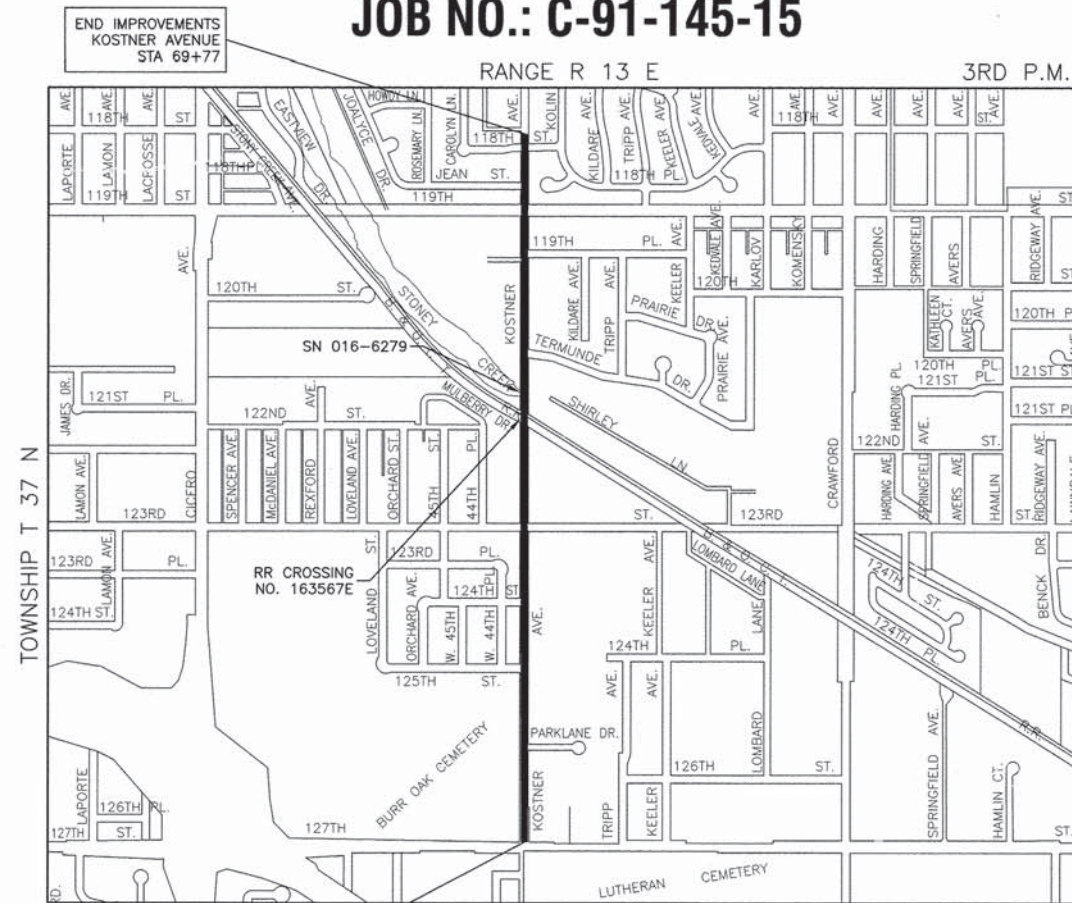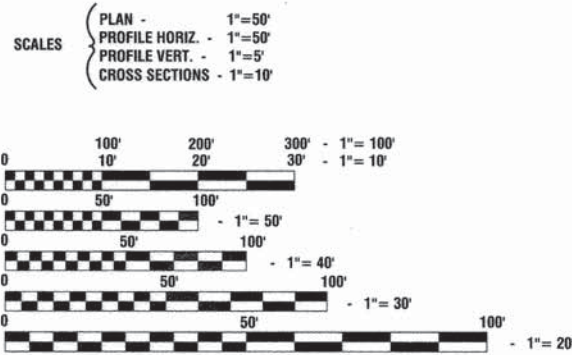


LOCATION MAP

GROSS LENGTH= 5,939 FEET= 1.12 MILES
NET LENGTH= 5,939 FEET= 1.12 MILES

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES, REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES, IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J. U. L. I. E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123 or 811

CONTRACT NO. 61C51



STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

Approved: JAN 18, 2016
Beth S. Kitching
Village of Alsip

Passed: FEBRUARY 9, 2016
Christopher Healt
District 1 Engineer of Local Roads & Streets

Released for Bid Based on Limited Review: February 16, 2016
John Fortman
Deputy Director of Highways, Region 1 Engineer

**PRINTED BY THE AUTHORITY OF
THE STATE OF ILLINOIS**

PREPARED BY OR UNDER THE
DIRECT SUPERVISION OF:



I.D.O.T. FEDERAL AID DESIGN ENGINEER: FAWAD AQUEEL, P.E. PTOE 847-705-4021, SCHAMBOURG, IL.
CONSULTANTS: ROBINSON ENGINEERING, LTD. 708-331-6700

GENERAL NOTES

1. THE ROBINSON ENGINEERING FIELD OFFICE (708-331-6700), AND THE STREET SUPERINTENDENT, MIKE FRAIDER, AT THE VILLAGE OF ALSIP SHALL BE NOTIFIED TWO (2) WORKING DAYS BEFORE THE CONSTRUCTION BEGINS.
2. BEFORE STARTING ANY EXCAVATION THE CONTRACTOR SHALL CALL "J.U.L.I.E." AT (800) 892-0123 OR 811 AND (312) 744-7000 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS UTILITIES. (48 HOUR NOTIFICATION REQUIRED)
3. UTILITIES INDICATED ON THE PLANS ARE PROVIDED FOR THE CONTRACTOR'S USE AND ARE BASED UPON INFORMATION AVAILABLE AT THE TIME OF THE ADVERTISEMENT FOR BIDS. THE OWNER AND ENGINEER DO NOT GUARANTEE THE ACCURACY OF UTILITY INFORMATION.
4. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DIMENSIONS AND CONDITIONS EXISTING IN THE FIELD PRIOR TO CONSTRUCTION AND ORDERING OF MATERIALS.
5. THE THICKNESS OF HMA MIXTURE STATED IN THE SPECIFICATIONS IS THE NOMINAL THICKNESS. DEVIATIONS FROM THE NOMINAL THICKNESS WILL BE PERMITTED WHEN SUCH DEVIATIONS OCCUR DUE TO IRREGULARITIES IN THE EXISTING SURFACE OR BASE ON WHICH THE HMA SURFACE IS PLACED.
6. ACCESS TO DRIVEWAYS SHALL BE MAINTAINED AT ALL TIMES BY LIMITING CURB AND GUTTER REPAIR TO ONE-HALF THE DRIVEWAY WIDTH AT ONE TIME AS WELL AS TEMPORARY AGGREGATE. ANY TEMPORARY AGGREGATE REQUIRED SHALL BE CONSIDERED INCLUDED IN THE COST OF THE RELATED PAY ITEM IT IS NEEDED FOR WHEN DIRECTED BY THE ENGINEER.
7. THE REMOVAL AND/OR REPLACEMENT OF ANY DRIVEWAYS, PAVEMENT, CURB, SIDEWALK, ETC. SHALL BE ACCOMPLISHED BY MEANS OF A SAW CUT JOINT, AT THE DIRECTION OF THE ENGINEER. SAW CUTTING WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE UNIT PRICE FOR THE VARIOUS REMOVAL ITEMS.
8. ANY LOOSE MATERIAL DEPOSITED IN THE FLOW LINE OF DITCHES, GUTTERS OR OTHER DRAINAGE STRUCTURES SHALL BE REMOVED BY THE END OF EACH DAY BY THE CONTRACTOR AT THEIR EXPENSE.
9. THE CONTRACTOR SHALL LEAVE ANY CLEAN EXCESS ORGANIC FILL EXCAVATED DURING THE CURB AND GUTTER AND SIDEWALK REMOVAL AND REPLACEMENT OPERATIONS ON SITE. ANY EXCESS MATERIAL SHALL BE SPREAD OR PLACED AT LOCATIONS DETERMINED BY THE ENGINEER. THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE UNIT PRICE FOR THE VARIOUS REMOVAL AND REPLACEMENT ITEMS. RESTORATION OF AREAS WHERE EXCESS MATERIALS IS PLACED SHALL BE PAID FOR AS SEEDING (COMPLETE).
10. CLASS D PATCHING QUANTITIES FOR THIS CONTRACT SHALL BE PERFORMED AT THE DIRECTION OF THE ENGINEER.
11. CONTRACTOR SHALL RESTORE DAMAGED TURF AREA DUE TO REMOVAL AND REPLACEMENT OF VARIOUS ITEMS ALONG THE PARKWAY WITH TOPSOIL FURNISH AND PLACE, 6" AND SEEDING, CLASS 2A AS DIRECTED BY THE ENGINEER (SEE SPECIAL PROVISIONS). INTERSEEDING, CLASS 2A SHALL BE USED TO REPAIR EXISTING BARREN TURF AREA IN THE PARKWAY AT LOCATIONS INDICATED ON THE PLANS.

FILE NAME = 14648_02-QUAN-01 - QUAN 02

USER NAME =	DESIGNED -- SDK	REVISED --
	CHECKED -- WPD	REVISED --
PLOT SCALE =	DRAWN -- NRD	REVISED --
PLOT DATE = 1-18-16	CHECKED -- APG	REVISED --

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

FAU 2403 (KOSTNER AVENUE)
ROAD RESURFACING
GENERAL NOTES

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	2
CONTRACT NO. 61C51				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)				

SCALE: NONE SHEET NO. 2 OF 21 SHEETS STA. TO STA.

SUMMARY OF QUANTITIES					CONSTRUCTION TYPE CODE	
S.I.	CODE NO.	PAY ITEM	UNIT	QUAN	ROADWAY 0005	SAFETY 0021
	20200100	EARTH EXCAVATION	CU YD	10	10	
	21101625	TOPSOIL FURNISH AND PLACE, 6"	SQ YD	968	968	
	25000210	SEEDING, CLASS 2A	ACRE	0.2	0.2	
	25000400	NITROGEN FERTILIZER NUTRIENT	POUND	27	27	
	25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	27	27	
	25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	27	27	
	25003210	INTERSEEDING, CLASS 2A	ACRE	0.1	0.1	
	35101600	AGGREGATE BASE COURSE, TYPE B 4"	SQ YD	22		22
	40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	9018	9018	
	40600825	POLYMERIZED LEVELING BINDER (MACHINE METHOD), N50	TON	562	562	
	40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	180	180	
	40603335	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50	TON	1229	1229	
	42300300	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 7 INCH	SQ YD	4	4	
	42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	4394		4394
	42400400	PORTLAND CEMENT CONCRETE SIDEWALK 7 INCH	SQ FT	105		105
	42400800	DETECTABLE WARNINGS	SQ FT	470		470
	44000157	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	SQ YD	18066	18066	
	44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	81	81	
	44000500	COMBINATION CURB AND GUTTER REMOVAL	FOOT	1885	1885	
	44000600	SIDEWALK REMOVAL	SQ FT	4373		4373
	44201747	CLASS D PATCHES, TYPE IV, 8 INCH	SQ YD	38	38	
	44201771	CLASS D PATCHES, TYPE IV, 10 INCH	SQ YD	34	34	
	60250200	CATCH BASINS TO BE ADJUSTED	EACH	20	20	
	60251500	CATCH BASINS TO BE ADJUSTED WITH NEW TYPE 11 FRAME AND GRATE	EACH	1	1	
	60255500	MANHOLES TO BE ADJUSTED	EACH	11	11	
	60260100	INLETS TO BE ADJUSTED	EACH	5	5	

* - INDICATES SPECIALTY ITEMS

SUMMARY OF QUANTITIES					CONSTRUCTION TYPE CODE	
S.I.	CODE NO.	PAY ITEM	UNIT	QUAN	ROADWAY 0005	SAFETY 0021
	60261300	INLETS TO BE ADJUSTED WITH NEW TYPE 11 FRAME AND GRATE	EACH	3	3	
	60603800	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12	FOOT	600	600	
	60605000	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24	FOOT	660	660	
	67100100	MOBILIZATION	LSUM	1	1	
	70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	LSUM	1	1	
	70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	LSUM	1	1	
	70300100	SHORT TERM PAVEMENT MARKING	FOOT	1345		1345
	70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	449		449
	72000100	SIGN PANEL - TYPE 1	SQ FT	78		78
	72900100	METAL POST - TYPE A	FOOT	195		195
	72900200	METAL POST - TYPE B	FOOT	60		60
*	78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	608		608
*	78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	7670		7670
*	78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	4555		4555
*	78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	1743		1743
*	78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	335		335
*	78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	158		158
*	78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	158		158
*	85000200	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION	EACH	1		1
*	88600100	DETECTOR LOOP, TYPE I	FOOT	179		179
	Z0004530	HOT-MIX ASPHALT DRIVEWAY PAVEMENT, 8"	SQ YD	39	39	
	Z0030850	TEMPORARY INFORMATION SIGNING	SQ FT	52		52
	Z0048665	RAILROAD PROTECTIVE LIABILITY INSURANCE	LSUM	1	1	
	X6026624	VALVE BOXES TO BE ADJUSTED (SPECIAL)	EACH	1	1	
	X6061815	COMBINATION CONCRETE CURB AND GUTTER, TYPE M (SPECIAL)	FOOT	625	625	

* - INDICATES SPECIALTY ITEMS

FILE NAME = 14648_02-QUAN-01 - QUAN 01


USER NAME =	DESIGNED -- SDK	REVISED --
PLOT SCALE =	CHECKED -- WPD	REVISED --
PLOT DATE = 1-18-16	DRAWN -- NRD	REVISED --
	CHECKED -- APG	REVISED --

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FAU 2403 (KOSTNER AVENUE)
ROAD RESURFACING
SUMMARY OF QUANTITIES


SCALE: NONE SHEET NO. 3 OF 21 SHEETS STA. TO STA.

F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 3
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61C51	
FED. AID PROJECT M-4003(426)				

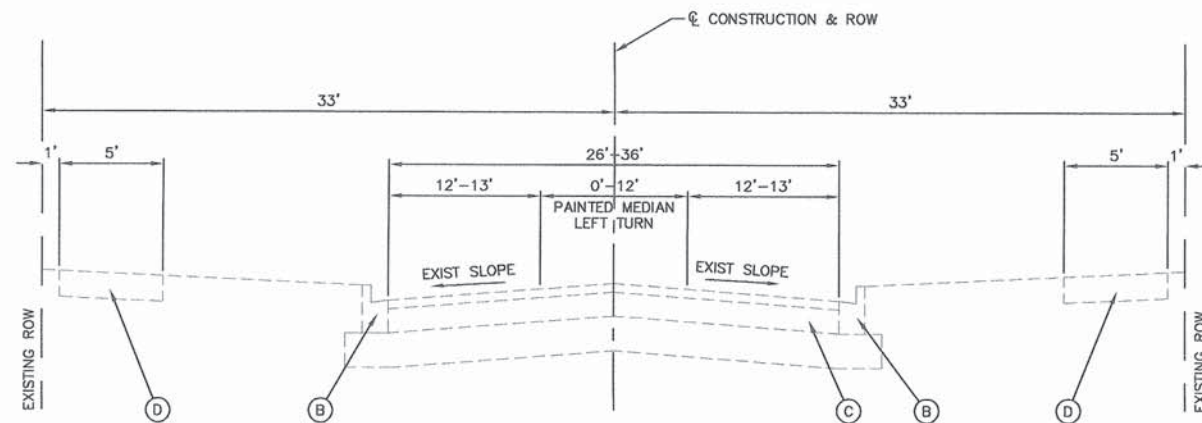


EXISTING TYPICAL SECTION

KOSTNER AVENUE
127TH STREET TO 123RD STREET
STA 10+38 TO STA 37+05

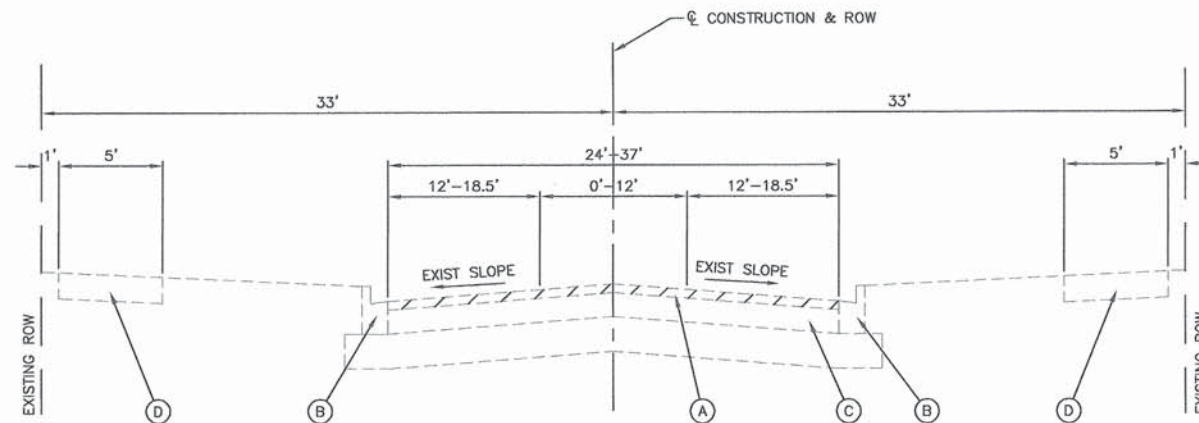

EXISTING TYPICAL SECTION


KOSTNER AVENUE
123RD STREET TO 118TH STREET
STA 37+05 TO STA 69+61

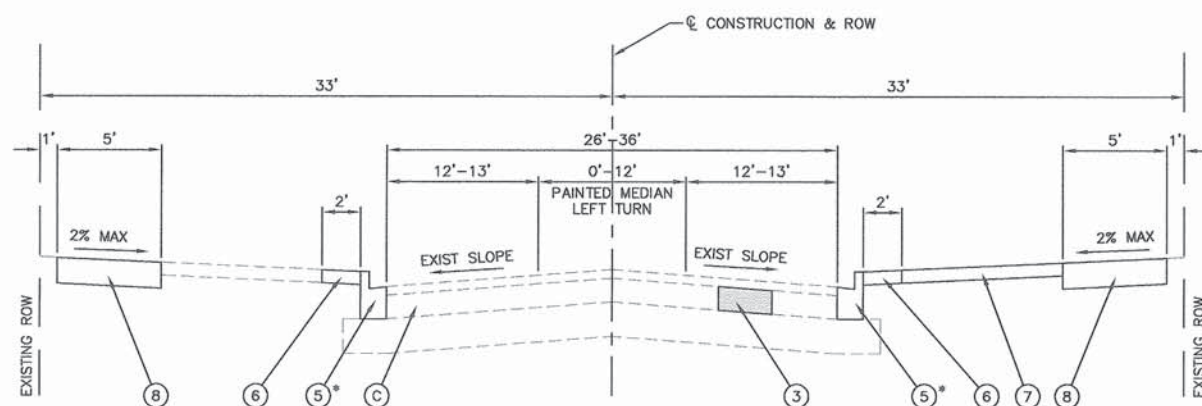

PROPOSED TYPICAL SECTION

KOSTNER AVENUE
127TH STREET TO 123RD STREET
STA 10+38 TO STA 37+05

* TYPE B-6.24

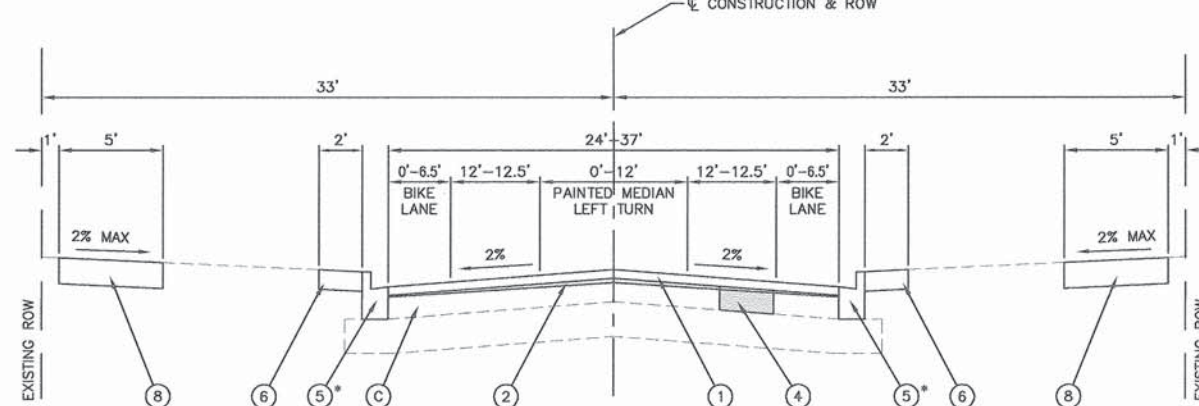

PROPOSED TYPICAL SECTION

KOSTNER AVENUE
123RD STREET TO 118TH STREET
STA 37+05 TO STA 69+61

EXISTING LEGEND

- (A) HOT MIX ASPHALT SURFACE REMOVAL, 2"
- (B) EXISTING CURB & GUTTER TO BE REMOVED AT LOCATIONS SHOWN ON PLANS OR DIRECTED BY ENGINEER
- (C) EXISTING HOT-MIX ASPHALT PAVEMENT
- (D) EXISTING PCC SIDEWALK TO BE REMOVED AT LOCATIONS SHOWN ON PLANS OR DIRECTED BY ENGINEER

PROPOSED LEGEND

- (1) HOT MIX ASPHALT SURFACE COURSE, MIX "D", N50, 1 1/2"
- (2) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- (3) CLASS D PATCH, 10", AT LOCATIONS SHOWN ON PLANS OR DIRECTED BY ENGINEER
- (4) CLASS D PATCH, 8", AT LOCATIONS SHOWN ON PLANS OR DIRECTED BY ENGINEER
- (5) PROPOSED CURB AND GUTTER TO BE INSTALLED AT LOCATIONS SHOWN ON PLAN OR DIRECTED BY ENGINEER (IN KIND)
- (6) TOPSOIL FURNISH AND PLACE, 6" AND SEEDING, CLASS 2A AS INDICATED ON THE PLANS OR AS DIRECTED BY THE ENGINEER
- (7) INTERSEEDING, CLASS 2A AS INDICATED ON THE PLANS OR AS DIRECTED BY THE ENGINEER
- (8) PROPOSED PORTLAND CEMENT CONCRETE SIDEWALK 5" (REPLACEMENT AT LOCATIONS DIRECTED BY THE ENGINEER)


HOT-MIX ASPHALT MIXTURE REQUIREMENTS

(CONTRACTOR SHALL MILL BEFORE PATCHING)

MIXTURE TYPE	AIR VOIDS @ Ndes
RESURFACING	
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50, 1-1/2" (IL-9.5MM)	4% @ 50 Gyr.
POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"	3.5% @ 50 Gyr.
CLASS D PATCHES, 8"	
HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70, 8" (IN 2 LIFTS)	4% @ 70 Gyr.
CLASS D PATCHES, 10"	
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50, 2" (IL-9.5MM)	4% @ 50 Gyr.
HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70, 8" (IN 2 LIFTS)	4% @ 70 Gyr.
DRIVEWAYS	
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50, 2" (IL-9.5MM)	4% @ 50 Gyr.
HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50, 6" (IN 2 LIFTS)	4% @ 50 Gyr.

NOTES:

- THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN. FOR "AC TYPE" AND "PERCENT RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.
- THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.
- CLASS D PATCHES, AT APPROXIMATE STATIONS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.

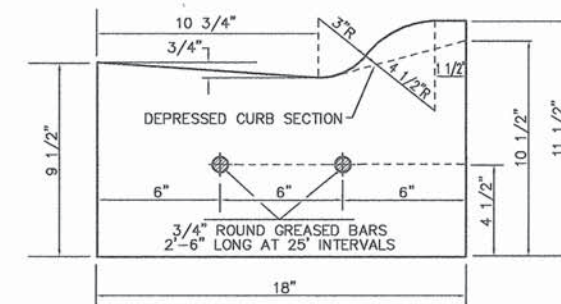

NOTE :
FORM SIZES TO BE USED 2"x10" IN FRONT AND 2"x12" IN BACK. ANY UNDERCUT BENEATH THE CURB SHALL BE BROUGHT UP TO GRADE WITH SAND OR STONE SCREENINGS, THE COST OF WHICH SHALL BE BORNE BY THE CONTRACTOR.

TYPE M CURB AND GUTTER DETAIL

FILE NAME = 14648_02-XSEC-01 - XSEC 01

USER NAME =	DESIGNED -- SDK	REVISED --
PLOT SCALE =	CHECKED -- WPD	REVISED --
PLOT DATE = 1-18-16	DRAWN -- NRD	REVISED --
	CHECKED -- APG	REVISED --




STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FAU 2403 (KOSTNER AVENUE)
ROAD RESURFACING
TYPICAL SECTIONS

SCALE: NONE SHEET NO. 4 OF 21 SHEETS STA. TO STA.

F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 4
CONTRACT NO. 61C51				

FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)

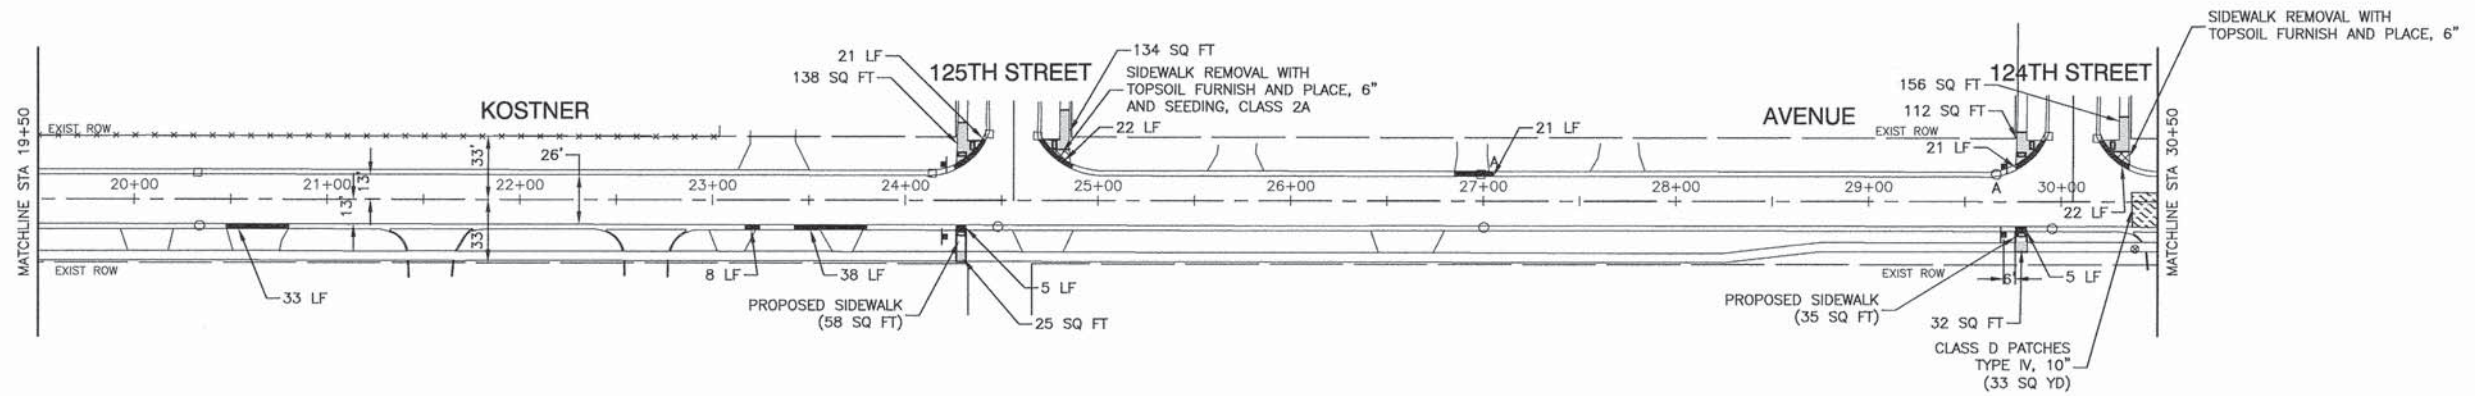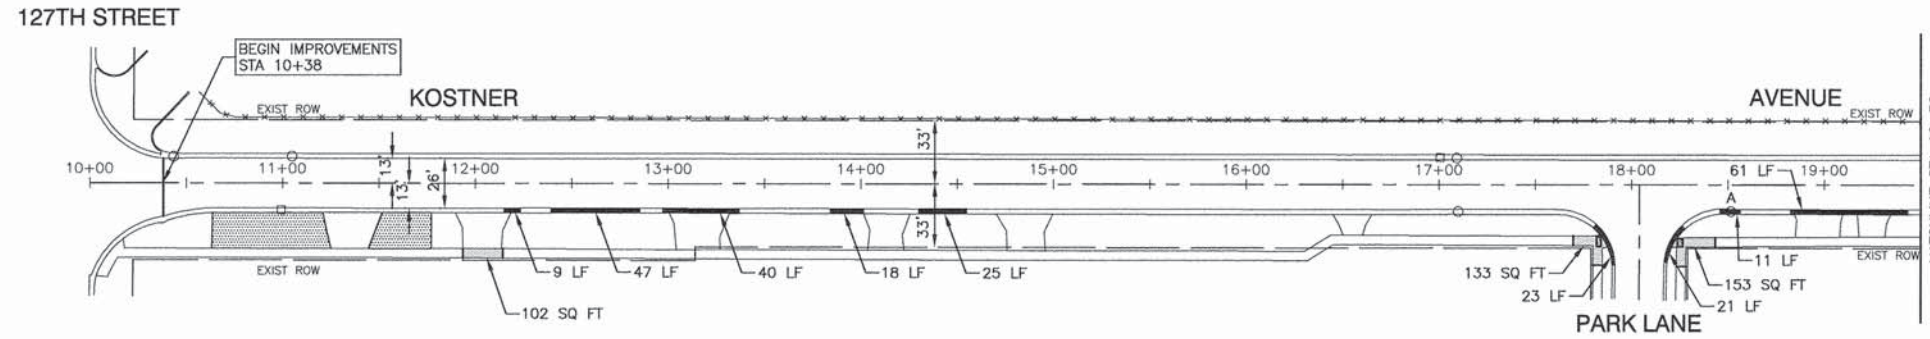

LEGEND

- CLASS D PATCH, TYPE IV (8" OR 10")
- HMA DRIVEWAY REMOVAL AND REPLACEMENT
- SIDEWALK REMOVAL
- CONCRETE SIDEWALK REMOVAL AND REPLACEMENT
- INTERSEEDING, CLASS 2A
- DETECTABLE WARNINGS
- BUTT JOINTS
- COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT (TYPE B-6.12, B-6.24, OR TYPE M (SPECIAL))
- "A" STRUCTURE TO BE ADJUSTED

NOTES:

1. PROPOSED SIDEWALK THROUGH DRIVEWAYS SHALL BE PORTLAND CEMENT CONCRETE SIDEWALK, 7 INCH, AND PAID AS SUCH. EXISTING DRIVEWAY WILL BE REMOVED AND BE INCLUDED IN THE DRIVEWAY REMOVAL PAY ITEM.
2. ANY SIDEWALK OR DRIVEWAY REMOVAL AND REPLACEMENT UP TO 2' BEHIND CURB AND GUTTER REMOVAL AND REPLACEMENT, SHALL BE INCLUDED IN THE VARIOUS REMOVAL AND REPLACEMENT ITEMS.
3. TOPSOIL FURNISH AND PLACE, 6" AND SEEDING, CLASS 2A SHALL BE USED FOR RESTORATION UP TO 2' WIDTH BEHIND CURB AND GUTTER, SIDEWALK, AND DRIVEWAY REMOVAL AND REPLACEMENT AS DIRECTED BY THE ENGINEER OR AS INDICATED ON THE PLANS (SEE SPECIAL PROVISIONS).

FILE NAME = 14648_02-PLAN-01 - P/MT 01



USER NAME =	DESIGNED -- SDK	REVISED --
	CHECKED -- WPD	REVISED --
PLOT SCALE =	DRAWN -- NRD	REVISED --
PLOT DATE = 1-18-16	CHECKED -- APG	REVISED --

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**FAU 2403 (KOSTNER AVENUE)
ROAD RESURFACING
PAVEMENT PLAN**

SCALE: SHEET NO. 5 OF 21 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	5
CONTRACT NO. 61C51				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)				

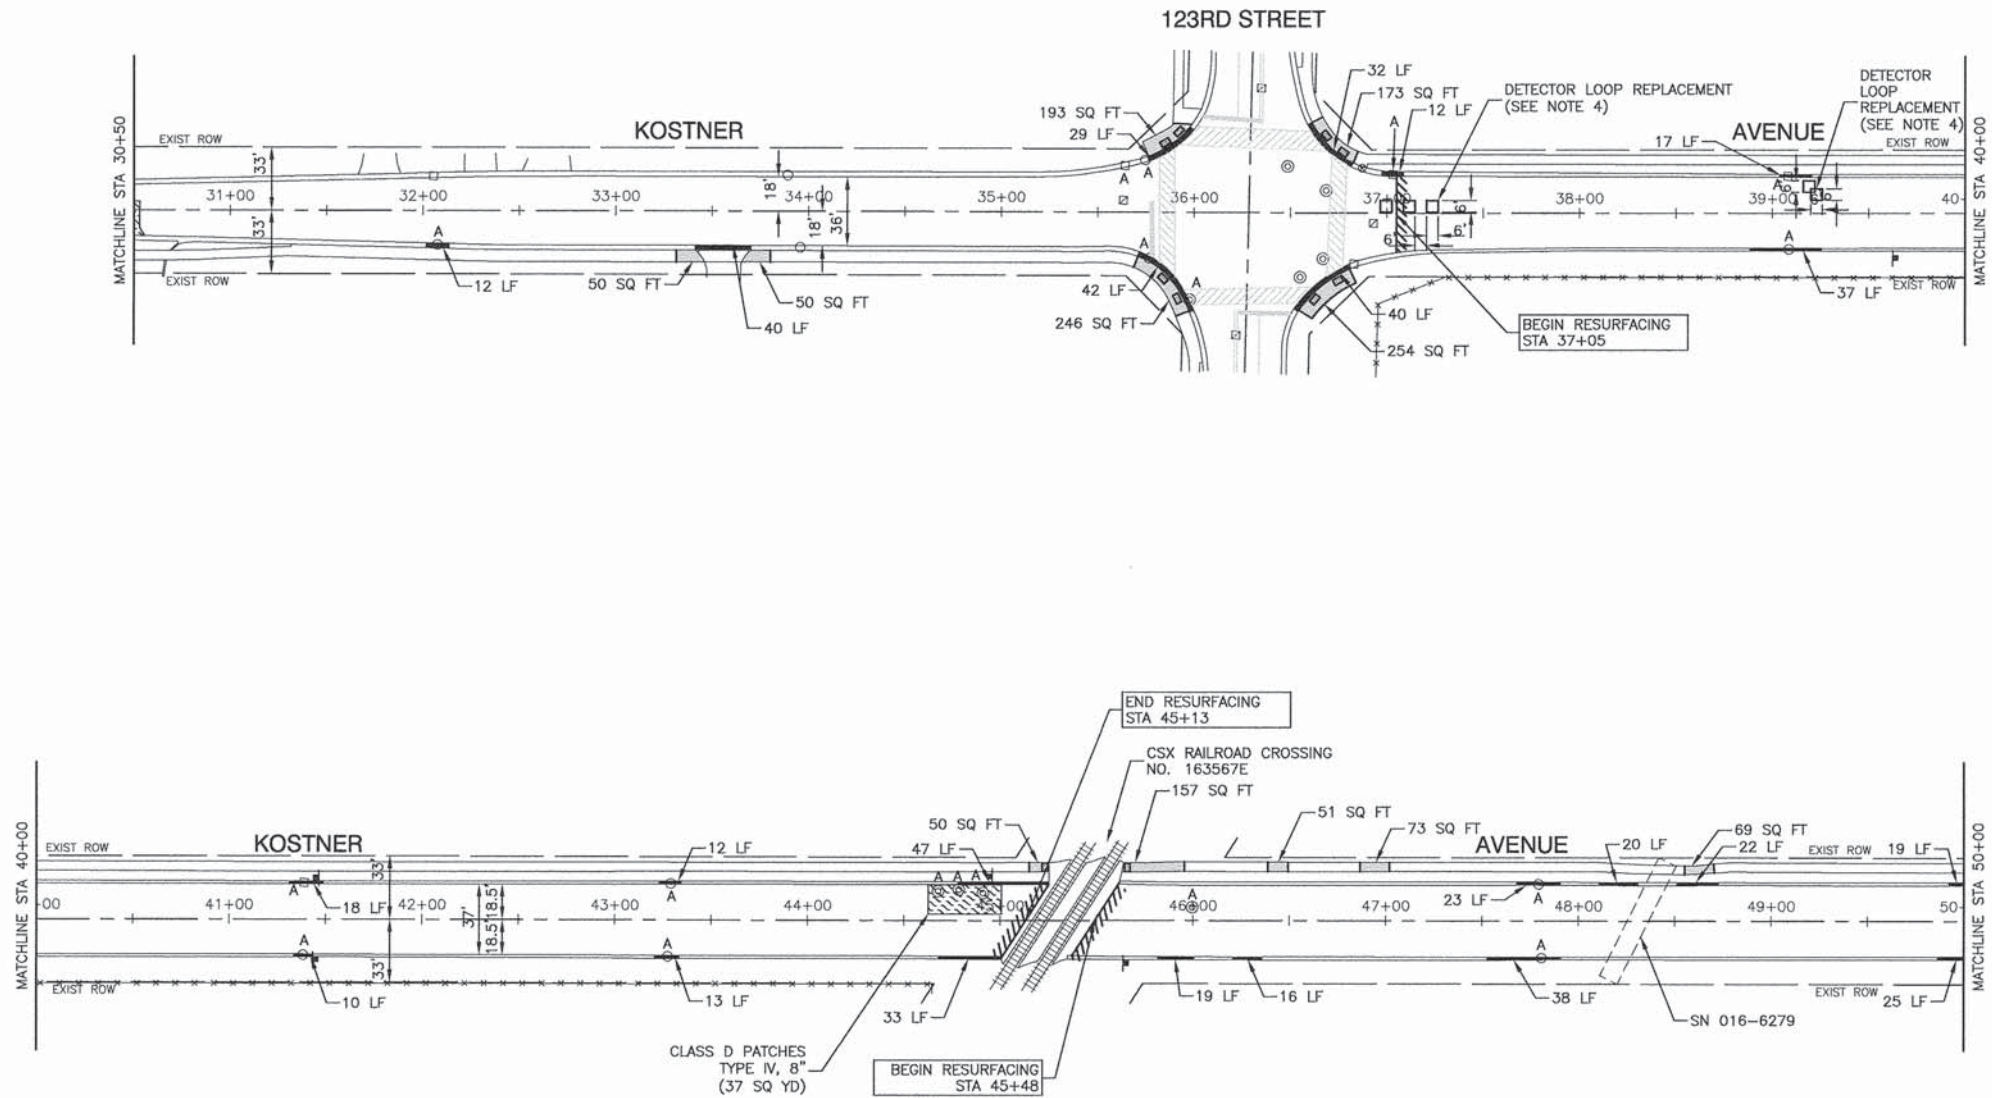

NOTES:

1. PROPOSED SIDEWALK THROUGH DRIVEWAYS SHALL BE PORTLAND CEMENT CONCRETE SIDEWALK, 7 INCH, AND PAID AS SUCH. EXISTING DRIVEWAY WILL BE REMOVED AND BE INCLUDED IN THE DRIVEWAY REMOVAL PAY ITEM.
2. ANY SIDEWALK OR DRIVEWAY REMOVAL AND REPLACEMENT UP TO 2' BEHIND CURB AND GUTTER REMOVAL AND REPLACEMENT, SHALL BE INCLUDED IN THE VARIOUS REMOVAL AND REPLACEMENT ITEMS.
3. TOPSOIL FURNISH AND PLACE, 6" AND SEEDING, CLASS 2A SHALL BE USED FOR RESTORATION UP TO 2' WIDTH BEHIND CURB AND GUTTER, SIDEWALK, AND DRIVEWAY REMOVAL AND REPLACEMENT AS DIRECTED BY THE ENGINEER OR AS INDICATED ON THE PLANS (SEE SPECIAL PROVISIONS).
4. BEFORE CONTRACTOR BEGINS DETECTOR LOOP WORK AT THE INTERSECTION OF 123RD STREET AND KOSTNER AVENUE, THE COOK COUNTY DEPARTMENT OF HIGHWAYS DESIGN ENGINEER SHALL BE CONTACTED AT (312)603-1730.



LEGEND

- CLASS D PATCH, TYPE IV (8" OR 10")
- HMA DRIVEWAY REMOVAL AND REPLACEMENT
- SIDEWALK REMOVAL
- CONCRETE SIDEWALK REMOVAL AND REPLACEMENT
- INTERSEEDING, CLASS 2A
- DETECTABLE WARNINGS
- BUTT JOINTS
- COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT (TYPE B-6.12, B-6.24, OR TYPE M (SPECIAL))
- "A" STRUCTURE TO BE ADJUSTED

FILE NAME = 14648_02-PLAN-01 - PVMT 02	USER NAME =	DESIGNED -- SDK	REVISED --	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	FAU 2403 (KOSTNER AVENUE) ROAD RESURFACING PAVEMENT PLAN	F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 6		
PLOT SCALE =	DRAWN -- NRD	REVISED --	REVISED --			SCALE:	SHEET NO. 6 OF 21 SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)		
PLOT DATE = 1-18-16	CHECKED -- APG	REVISED --	REVISED --			CONTRACT NO. 61C51						
CONTRACT NO. 61C51												



SCALE: 1" = 50'

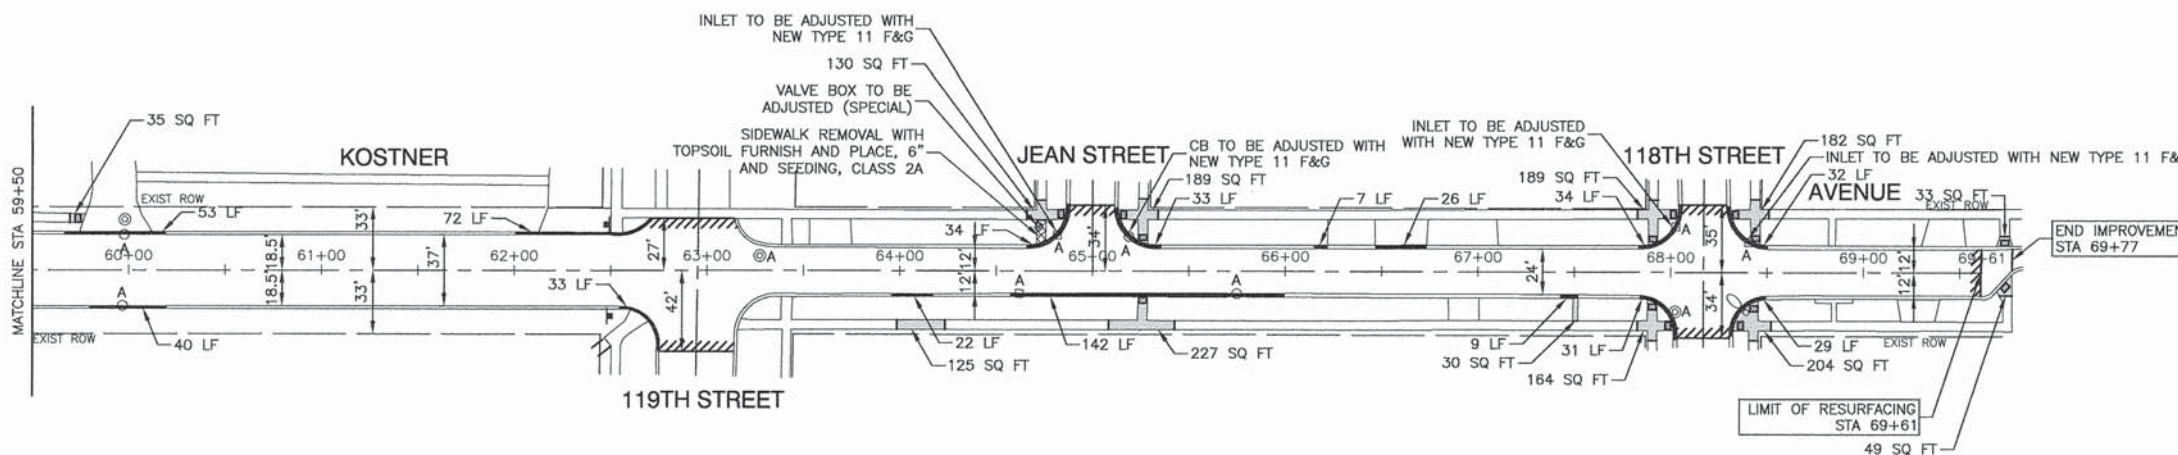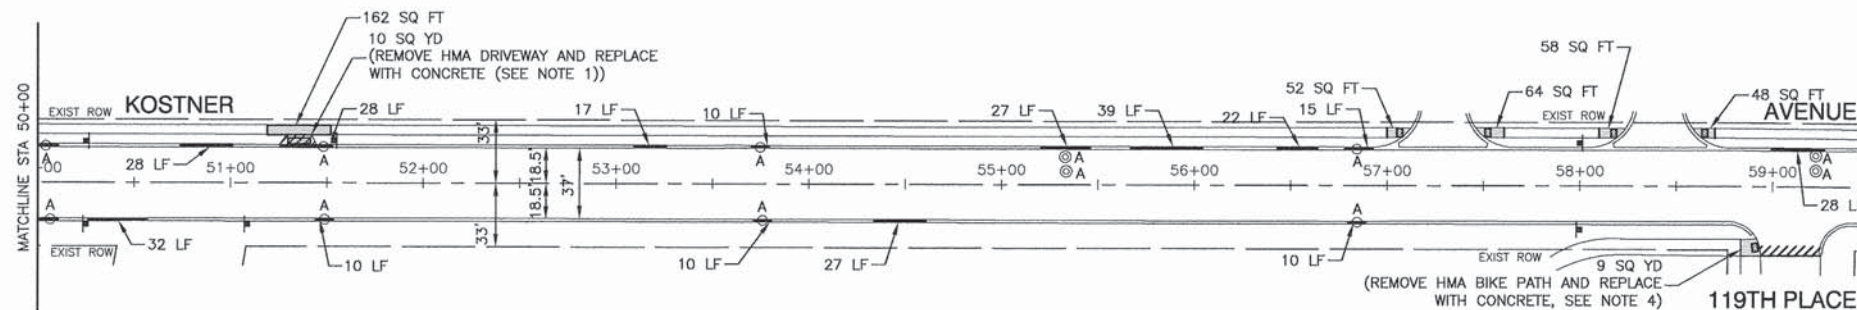

NOTES:

1. PROPOSED SIDEWALK THROUGH DRIVEWAYS SHALL BE PORTLAND CEMENT CONCRETE SIDEWALK, 7 INCH, AND PAID AS SUCH. EXISTING DRIVEWAY WILL BE REMOVED AND BE INCLUDED IN THE DRIVEWAY REMOVAL PAY ITEM.
2. ANY SIDEWALK OR DRIVEWAY REMOVAL AND REPLACEMENT UP TO 2' BEHIND CURB AND GUTTER REMOVAL AND REPLACEMENT, SHALL BE INCLUDED IN THE VARIOUS REMOVAL AND REPLACEMENT ITEMS.
3. TOPSOIL FURNISH AND PLACE, 6" AND SEEDING, CLASS 2A SHALL BE USED FOR RESTORATION UP TO 2' WIDTH BEHIND CURB AND GUTTER, SIDEWALK, AND DRIVEWAY REMOVAL AND REPLACEMENT AS DIRECTED BY THE ENGINEER OR AS INDICATED ON THE PLANS (SEE SPECIAL PROVISIONS).
4. REMOVING THE HMA BIKE PATH SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR DRIVEWAY PAVEMENT REMOVAL AND REPLACING WITH CONCRETE. SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR PORTLAND CEMENT CONCRETE SIDEWALK, 5 INCH.

LEGEND

- CLASS D PATCH, TYPE IV (8" OR 10")
- HMA DRIVEWAY REMOVAL AND REPLACEMENT
- SIDEWALK REMOVAL
- CONCRETE SIDEWALK REMOVAL AND REPLACEMENT
- INTERSEEDING, CLASS 2A
- DETECTABLE WARNINGS
- BUTT JOINTS
- COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT (TYPE B-6.12, B-6.24, OR TYPE M (SPECIAL))
- "A" STRUCTURE TO BE ADJUSTED

FILE NAME = 14648_02-PLAN-01 - PVMT 03

USER NAME =	DESIGNED -- SDK	REVISED --
	CHECKED -- WPD	REVISED --
PLOT SCALE =	DRAWN -- NRD	REVISED --
PLOT DATE = 1-18-16	CHECKED -- APG	REVISED --

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION



FAU 2403 (KOSTNER AVENUE)
ROAD RESURFACING
PAVEMENT PLAN

SCALE: SHEET NO. 7 OF 21 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	7
CONTRACT NO. 61C51				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)				



SCALE: 1" = 50'

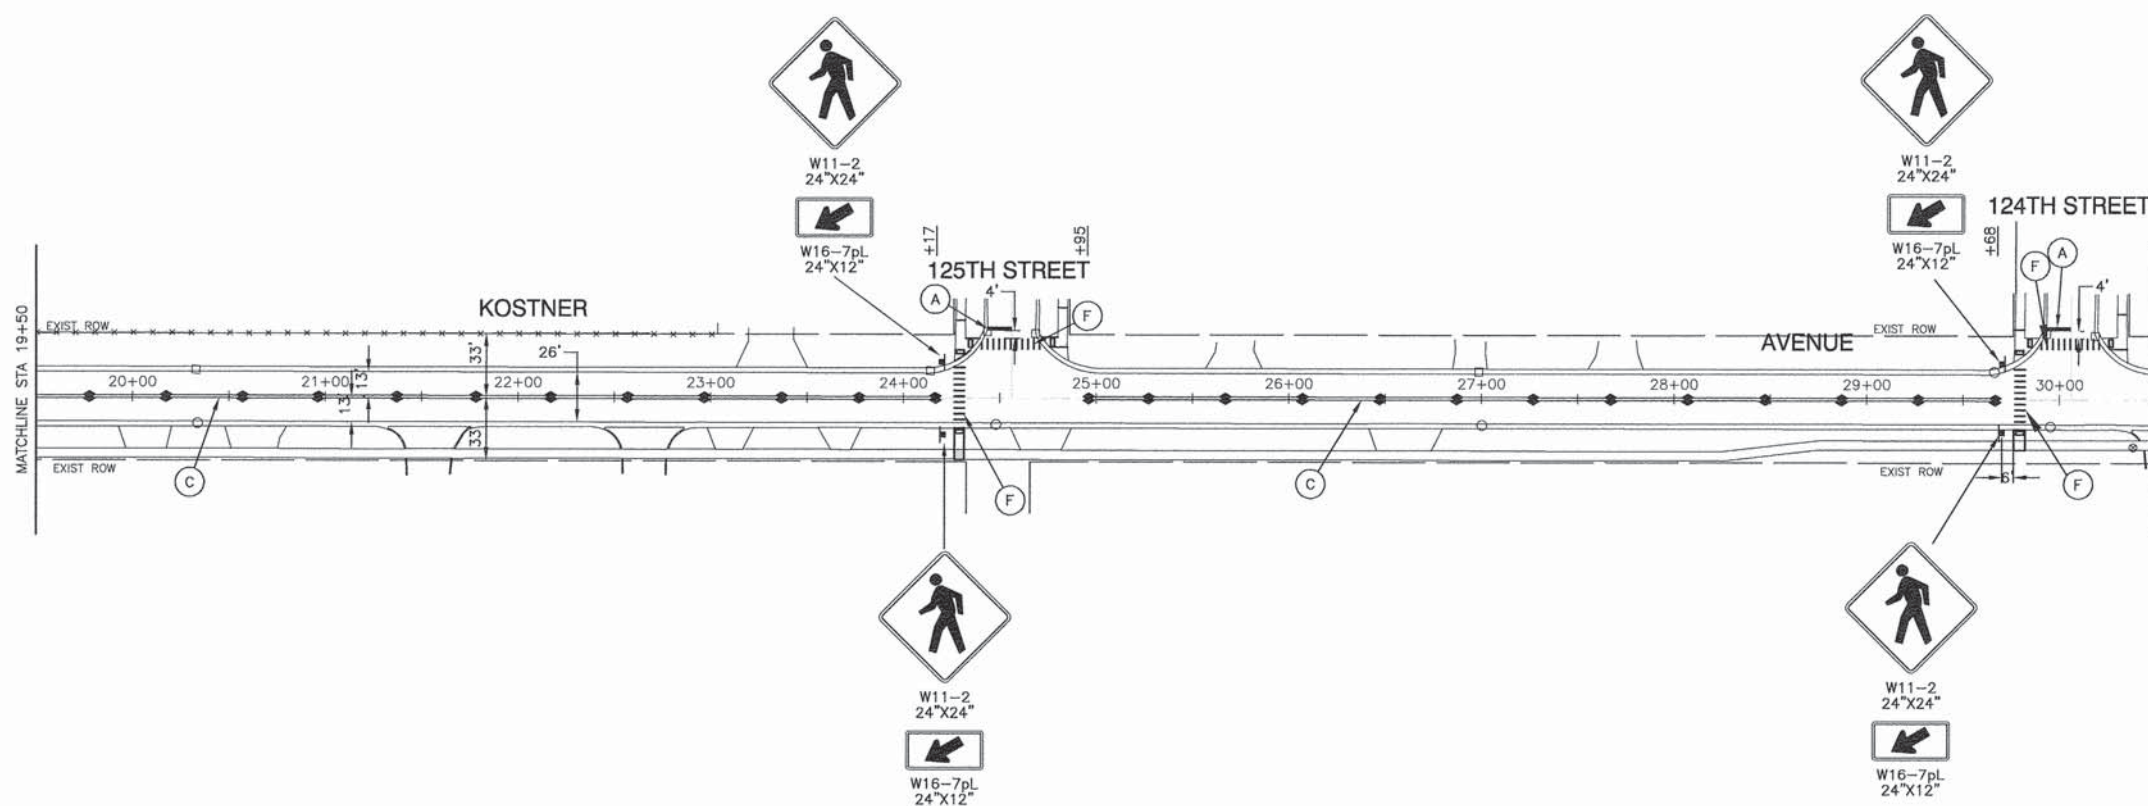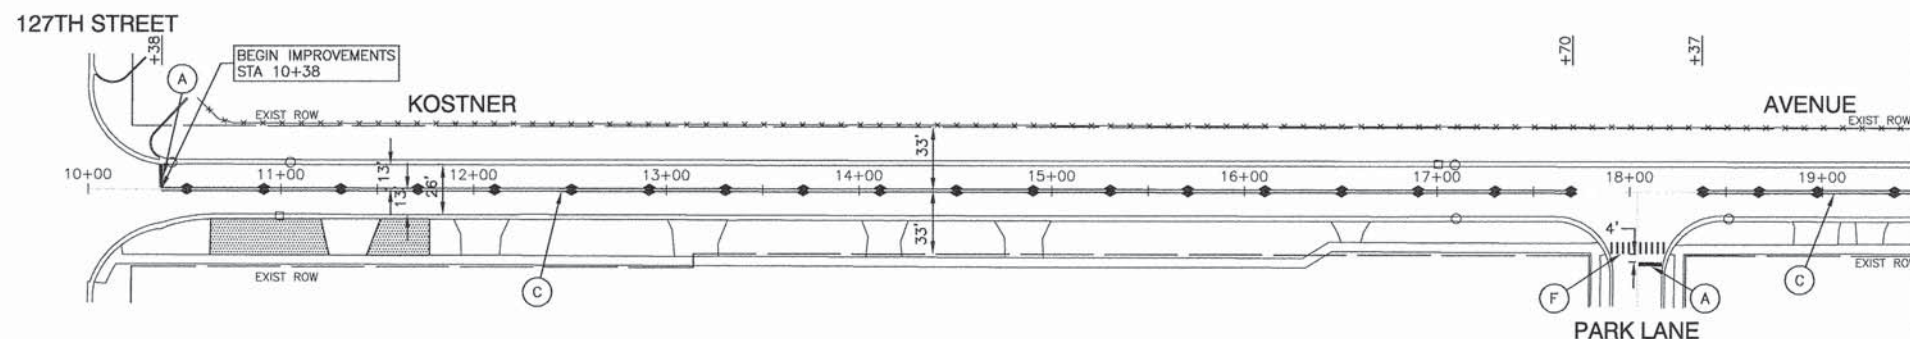

LEGEND

- (A) THERMOPLASTIC PAVEMENT MARKING - WHITE, 24"
- (B) THERMOPLASTIC PAVEMENT MARKING - YELLOW, LINE 4", SKIP DASH (10' LINE-30' SPACE)
- (C) THERMOPLASTIC PAVEMENT MARKING - YELLOW, DOUBLE LINE 4" (11" C-C)
- (D) THERMOPLASTIC PAVEMENT MARKING - WHITE, 6"
- (E) THERMOPLASTIC PAVEMENT MARKING - YELLOW, 12" (EQUALLY SPACED, 5 MIN.)
- (F) THERMOPLASTIC PAVEMENT MARKING - WHITE, 12" (24" SPACE)
- (G) THERMOPLASTIC PAVEMENT MARKING - WHITE, LETTERS AND SYMBOLS
- (H) THERMOPLASTIC PAVEMENT MARKING - YELLOW, DOUBLE LINE, 6" SOLID LINE & 4" SKIP DASH (10' LINE-30' SPACE)
- ◆ TWO-WAY AMBER MARKER
- ◀ ONE-WAY AMBER MARKER
- ◀ ONE-WAY CRYSTAL MARKER (W/O)

FILE NAME = 14648_02-PLAN-01 - PVMK 01



USER NAME =	DESIGNED -- SDK	REVISED --
CHECKED -- WPD	REVISED --	
PLOT SCALE =	DRAWN -- NRD	REVISED --
PLOT DATE = 1-18-16	CHECKED -- APG	REVISED --

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FAU 2403 (KOSTNER AVENUE)
ROAD RESURFACING
PAVEMENT MARKING & SIGNAGE PLAN

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	8
CONTRACT NO. 61C51				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)				

SCALE: SHEET NO. 8 OF 21 SHEETS STA. TO STA.

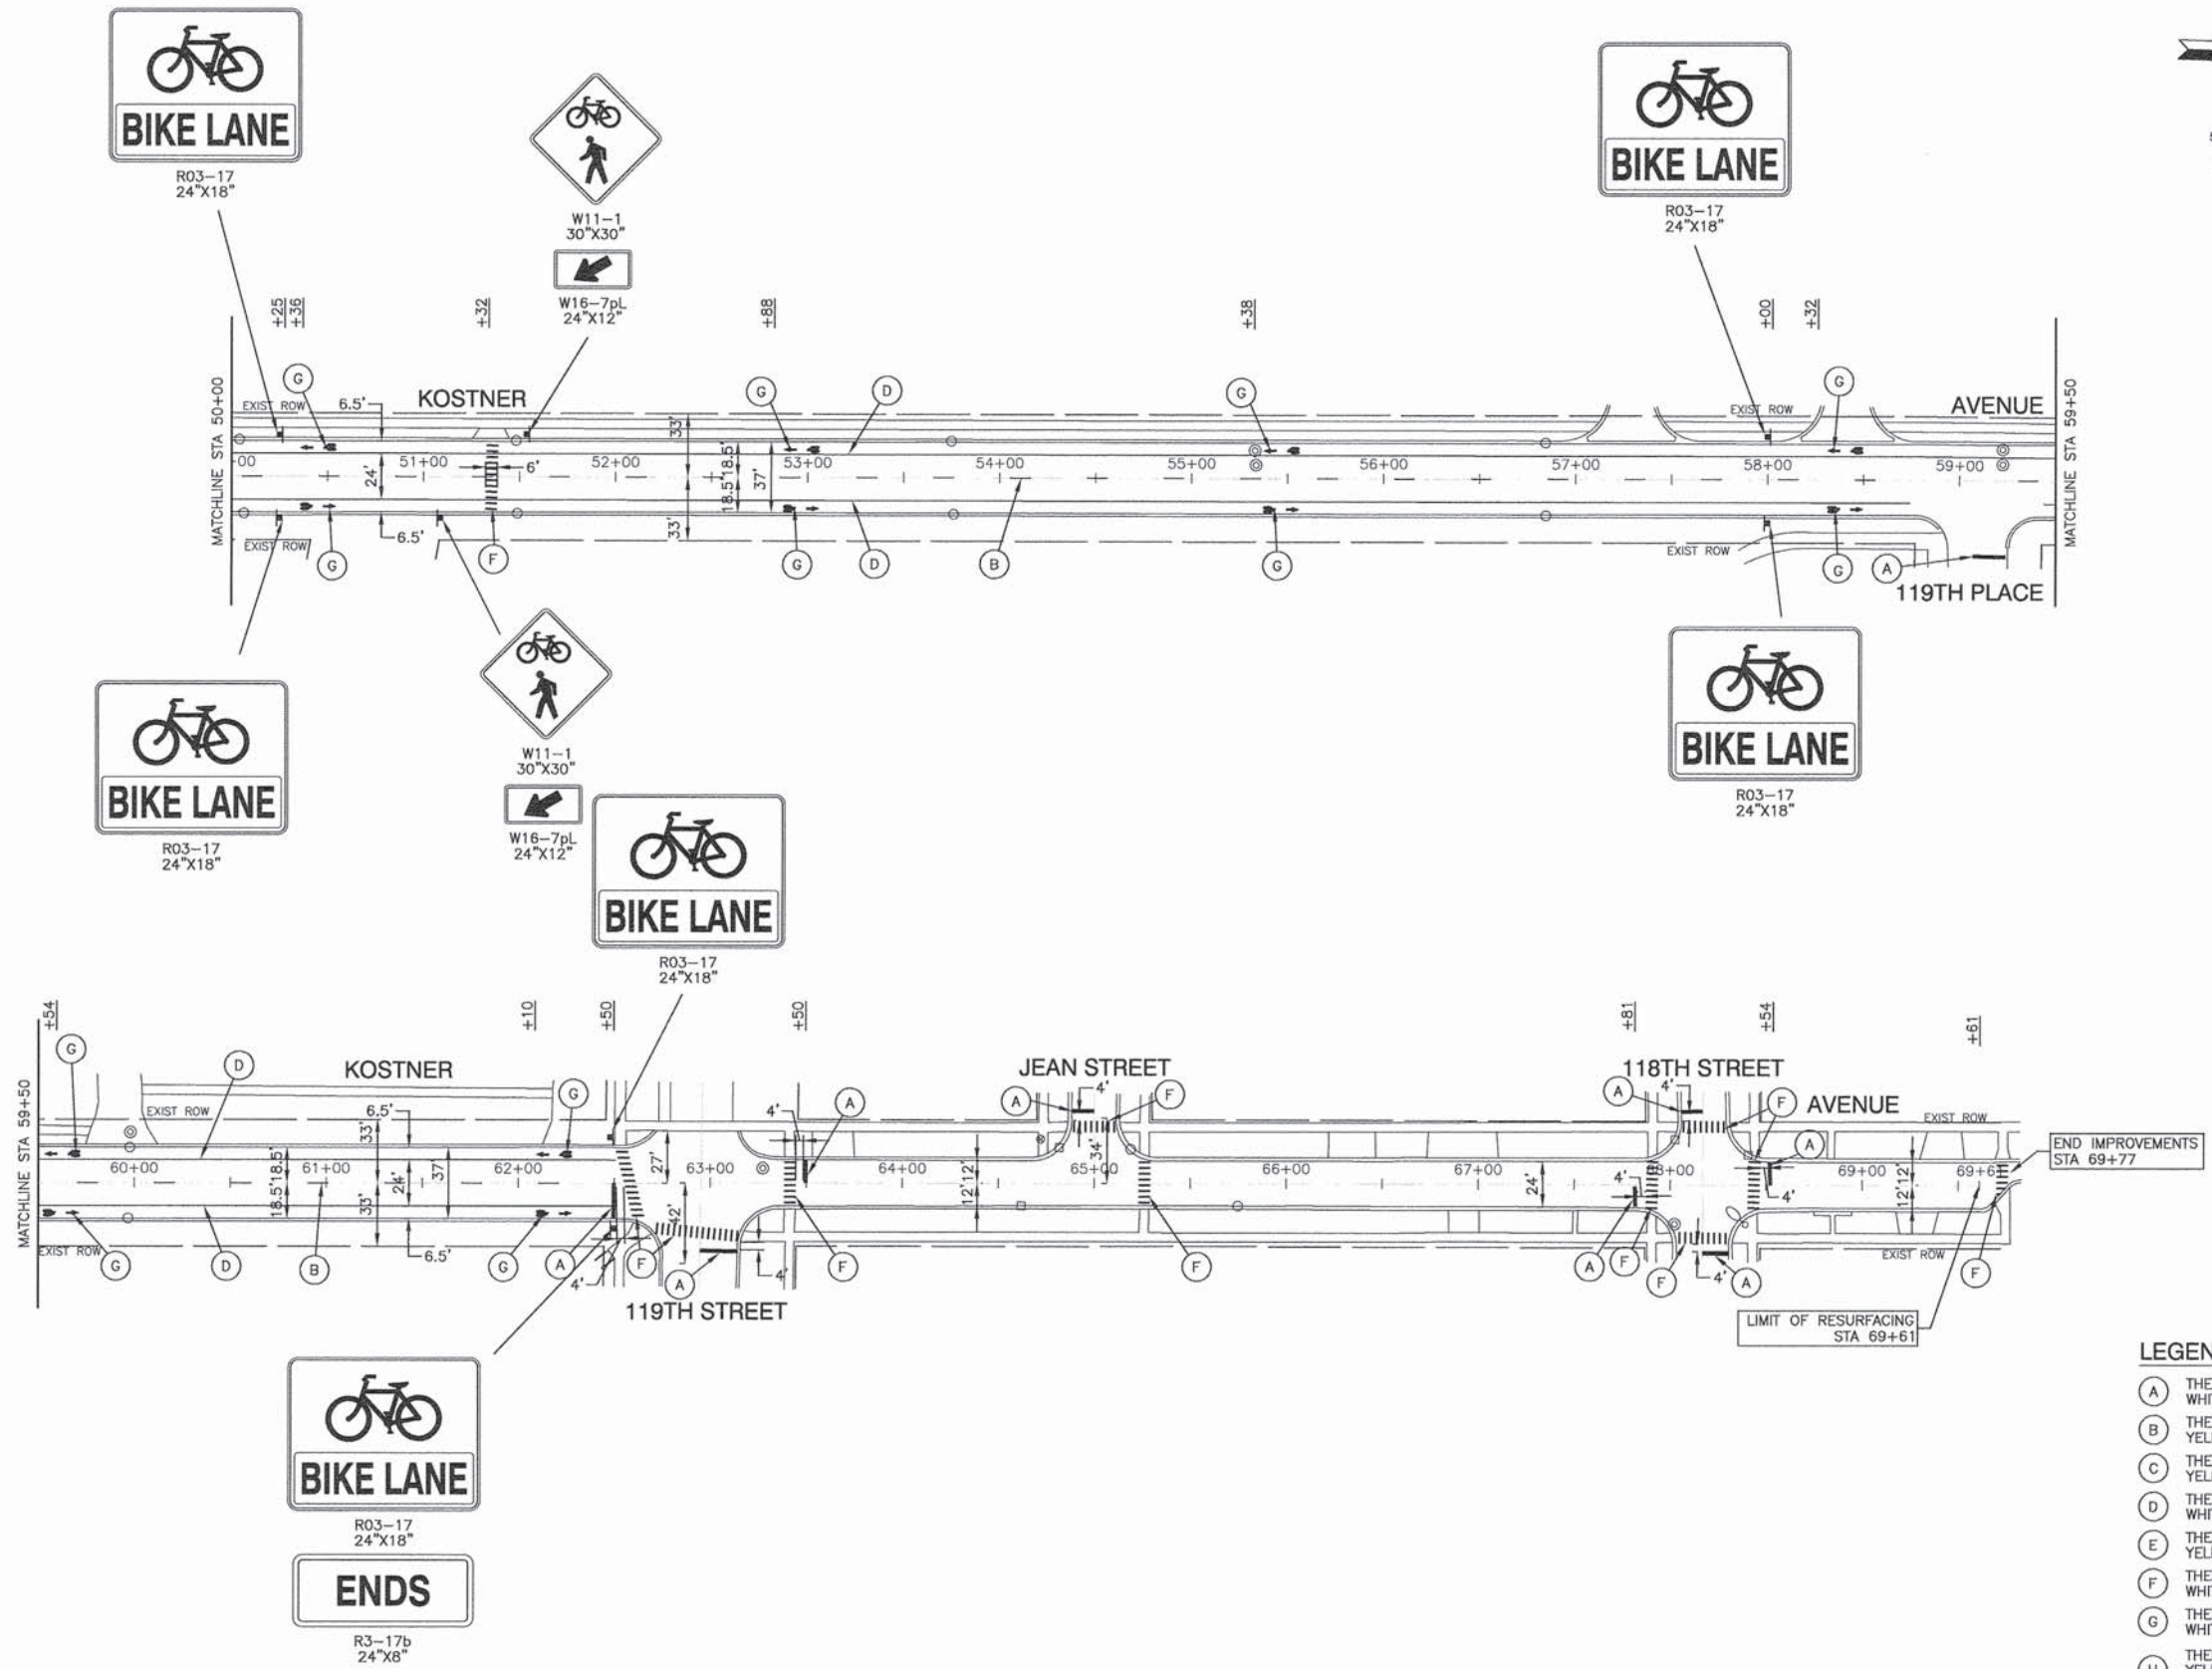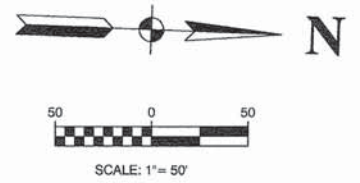

FILE NAME = 14648_02-PLAN-01 - PVMK 03


USER NAME =	DESIGNED - SDK	REVISED -
PLOT SCALE =	CHECKED - WPD	REVISED -
PLOT DATE = 1-18-16	DRAWN - NRD	REVISED -
	CHECKED - APG	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FAU 2403 (KOSTNER AVENUE) ROAD RESURFACING PAVEMENT MARKING & SIGNAGE PLAN		
SCALE:	SHEET NO. 10 OF 21 SHEETS	STA. TO STA.

F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 10
FED. ROAD DIST. NO. 1 ILLINOIS		FED. AID PROJECT M-4003(426)		

CONTRACT NO. 61C51

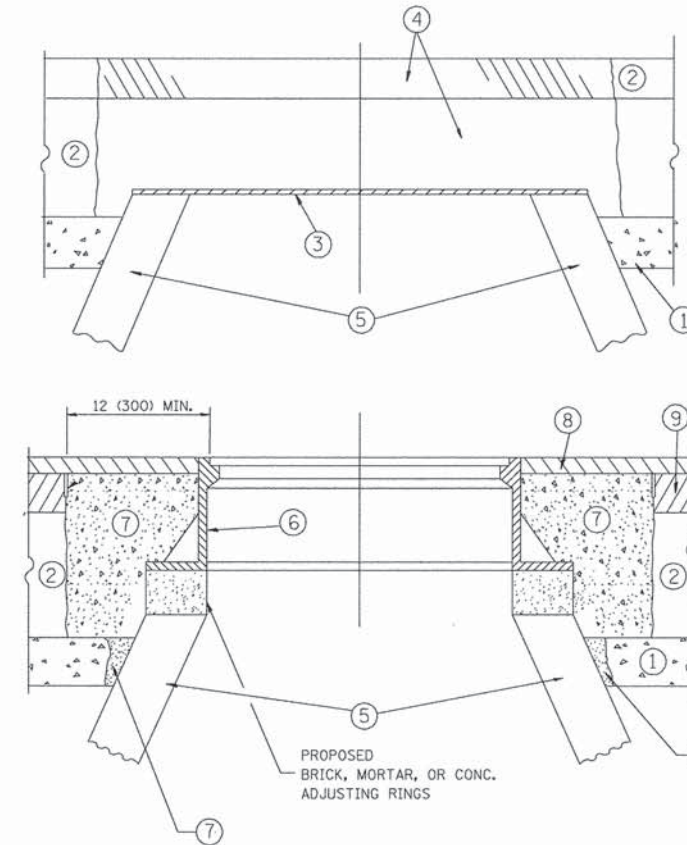

CONSTRUCTION PROCEDURES

STAGE 1 (BEFORE PAVEMENT MILLING)

- A) REMOVE A MINIMUM OF 12 (300) OF THE PAVEMENT FROM AROUND THE STRUCTURE.
- B) REMOVE THE EXISTING FRAME AND LID FROM THE STRUCTURE.
- C) COVER THE STRUCTURE OPENING WITH A 36 (900) DIAMETER METAL PLATE.
- D) BACKFILL WITH CRUSHED STONE AND A MINIMUM 1/2 (40) THICK HMA SURFACE MIX APPROVED BY THE ENGINEER.

STAGE 2 (AFTER PAVEMENT MILLING)

- A) REMOVE THE HMA SURFACE MIX AND CRUSHED STONE.
- B) INSTALL THE FRAME AND LID; ADJUST THE FRAME TO ITS FINAL SURFACE ELEVATION.
- C) THE SURROUNDING SPACE SHALL BE FILLED WITH CLASS PP-1* CONCRETE TO THE ELEVATION OF THE SURFACE OF THE EXISTING BASE COURSE OR THE BINDER COURSE.

*UNLESS OTHERWISE SPECIFIED IN THE PLANS.

THE PROCEDURE EXPLAINED ABOVE SHALL CONFORM TO THE APPLICABLE PORTIONS OF SECTIONS 353, 406, 602, AND 603 OF THE STANDARD SPECIFICATIONS EXCEPT THAT "THE CONTRACTOR SHALL ADJUST THE STRUCTURES TO THE FINISHED PAVEMENT ELEVATION NO MORE THAN 5 CALENDAR DAYS PRIOR TO PLACEMENT OF THE FINAL LIFT OF SURFACE UNLESS APPROVED BY THE ENGINEER."

LEGEND

- ① SUB-BASE GRANULAR MATERIAL
- ② EXISTING PAVEMENT
- ③ 36 (900) DIAMETER METAL PLATE
- ④ PROPOSED CRUSHED STONE AND HMA SURFACE MIX
- ⑤ EXISTING STRUCTURE
- ⑥ FRAME AND LID (SEE NOTES)
- ⑦ CLASS PP-1* CONCRETE
- ⑧ PROPOSED HMA SURFACE COURSE
- ⑨ PROPOSED HMA BINDER COURSE

LOCATION OF STRUCTURES:

THE CONTRACTOR WILL BE REQUIRED TO KEEP A RECORD OF THE LOCATIONS OF THE BURIED STRUCTURES ACCORDING TO THE STATION AND DISTANCE LEFT OR RIGHT OF THE CENTERLINE OF PAVEMENT. UPON COMPLETION OF THE WORK, THE CONTRACTOR WILL DELIVER THE RECORD TO THE ENGINEER.

BASIS OF PAYMENT:

REMOVING FRAMES AND LIDS ON DRAINAGE AND UTILITY STRUCTURES IN THE PAVEMENT PRIOR TO MILLING, AND ADJUSTING TO FINAL GRADE PRIOR TO PLACING THE SURFACE COURSE, WILL BE PAID FOR AT THE CONTRACT UNIT PRICE EACH FOR "FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)."

THIS WORK WILL NOT BE PAID FOR WHEN DRAINAGE AND UTILITY STRUCTURES ARE SPECIFIED FOR PAYMENT AS STRUCTURE RECONSTRUCTION.

NEW FRAMES AND LIDS, WHEN SPECIFIED, WILL BE PAID FOR SEPARATELY.

NOTES:

EXISTING BROKEN FRAMES AND LIDS SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR AND SHALL BE REPLACED AS DIRECTED BY THE ENGINEER. REPLACEMENT FRAMES AND LIDS WILL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS UNLESS A SEPARATE PAY ITEM HAS BEEN PROVIDED.

IF THE EXISTING LIDS ARE OPEN, THE FRAME WILL BE ADJUSTED TO THE ELEVATION OF THE MILLED PAVEMENT SURFACE PRIOR TO THE MILLING OPERATION. THE FRAME WILL NOT BE REMOVED AND COVERED BY THE METAL PLATE.

CITY OF CHICAGO CASTINGS ARE THE PROPERTY OF THE CITY AND THE CONTRACTOR SHALL NOTIFY THE CITY FOR REMOVAL AND DISPOSITION OF THE CASTINGS.

THE METAL PLATE USED TO COVER THE STRUCTURE SHALL REMAIN THE PROPERTY OF THE CONTRACTOR.

WHEN STRUCTURES ARE TO BE ADJUSTED OR RECONSTRUCTED, THE LOWERING AND RAISING OF THE FRAMES AND LIDS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE CORRESPONDING PAY ITEM.

DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN


FILE NAME =	USER NAME = bauerdl	DESIGNED - R. SHAH	REVISED - R. WIEDEMAN 05-14-04
ct:\pw_work\pwidot\bauerdl\d0108315\bd08.dgn		DRAWN -	REVISED - R. BORO 01-01-07
	PLOT SCALE = 1/648,5000 ' / m	CHECKED -	REVISED - R. BORO 03-09-11
	PLOT DATE = 12/6/2011	DATE - 10-25-94	REVISED - R. BORO 12-06-11

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE
DETAILS FOR
FRAMES AND LIDS ADJUSTMENT WITH MILLING

SCALE: NONE SHEET NO. 11 OF 21 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00087-00-RS	COOK	21	11
BD600-03 (BD-8)		CONTRACT NO. 61C51		
FED. ROAD DIST. NO. 1		ILLINOIS FED. AID PROJECT M-4003(426)		

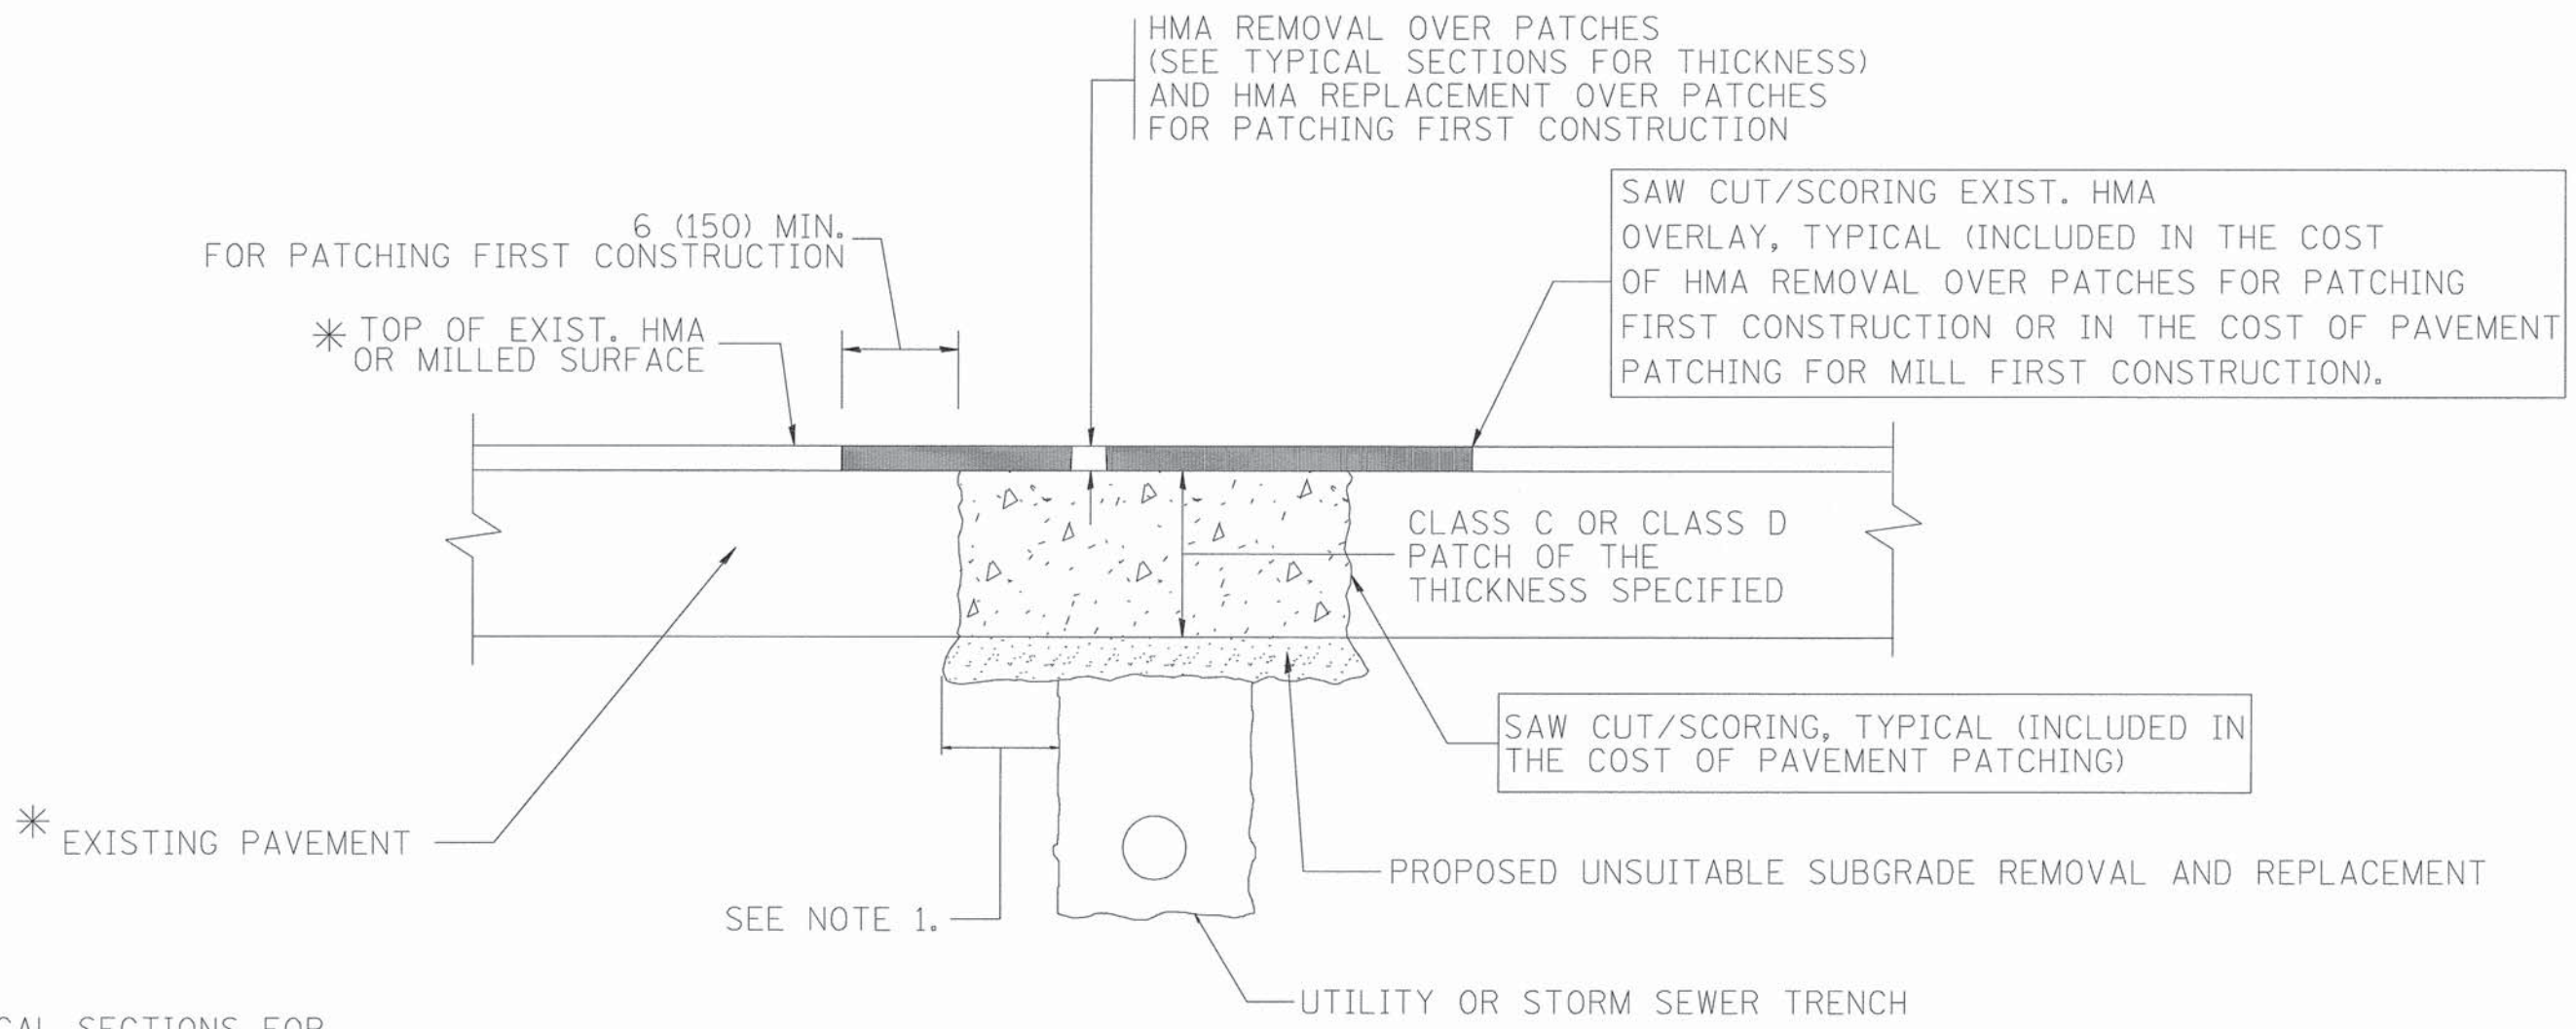

* SEE TYPICAL SECTIONS FOR THICKNESS AND MATERIALS

NOTES:

1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12 (300) WIDER ON EACH SIDE OF THE TRENCH.
2. FOR METHOD OF MEASUREMENT AND BASIS OF PAYMENT, SEE RECURRING SPECIAL PROVISION "PATCHING WITH HOT-MIX ASPHALT OVERLAY REMOVAL".

SEQUENCE OF CONSTRUCTION (PATCHING FIRST)


1. REMOVE THE EXISTING HMA MATERIAL OVER THE AREA TO BE PATCHED.
2. REMOVE AND REPLACE WITH CLASS C OR D PATCH.
3. REPLACE HMA MATERIAL OVER THE AREA TO BE PATCHED.

SEQUENCE OF CONSTRUCTION (MILLING FIRST)


1. MILL HMA FIRST IF THERE IS AT LEAST 4 1/2 INCHES OR MORE OF HMA MATERIAL ON TOP OF THE EXISTING PAVEMENT OR IF THE PAVEMENT IS FULL DEPTH HMA. A MINIMUM OF 2 INCHES OF HMA MATERIAL SHALL BE IN PLACE AFTER MILLING.
2. REMOVE AND REPLACE WITH FULL DEPTH CLASS D PATCHES TO TOP OF MILLED SURFACE.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.


FILE NAME = c:\projects\distatd22x34\bd22.dgn	USER NAME = bouerd1	DESIGNED - R. SHAH	REVISED - A. ABBAS 04-27-98	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DISTRICT ONE PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT			F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 12
	PLOT SCALE = 50.000' / IN.	CHECKED -	REVISED - R. BORO 01-01-07		SCALE: NONE	SHEET NO. 12 OF 21 SHEETS	STA. TO STA.	BD400-04 (BD-22)		CONTRACT NO. 61C51		
	PLOT DATE = 10/27/2008	DATE - 10-25-94	REVISED - K. ENG 10-27-08		FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)							

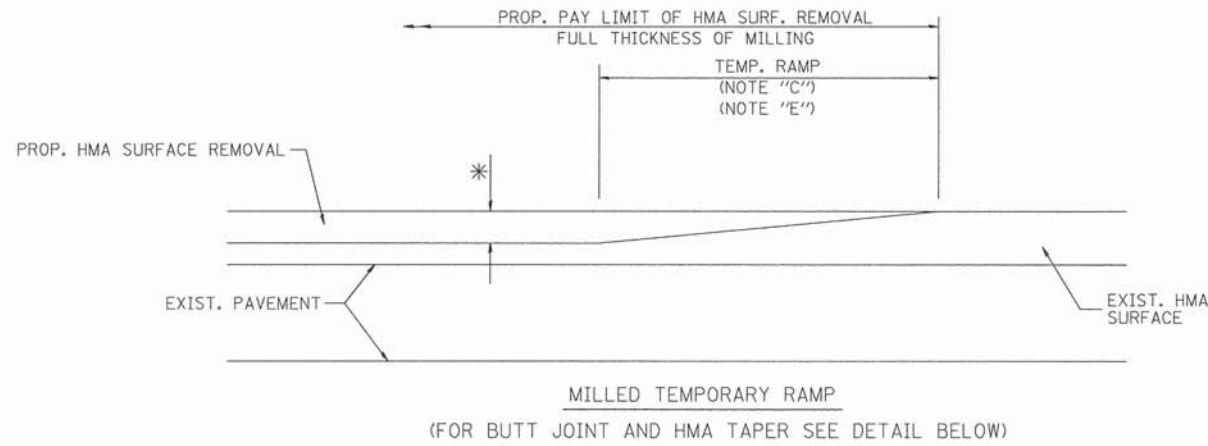


OPTION 1

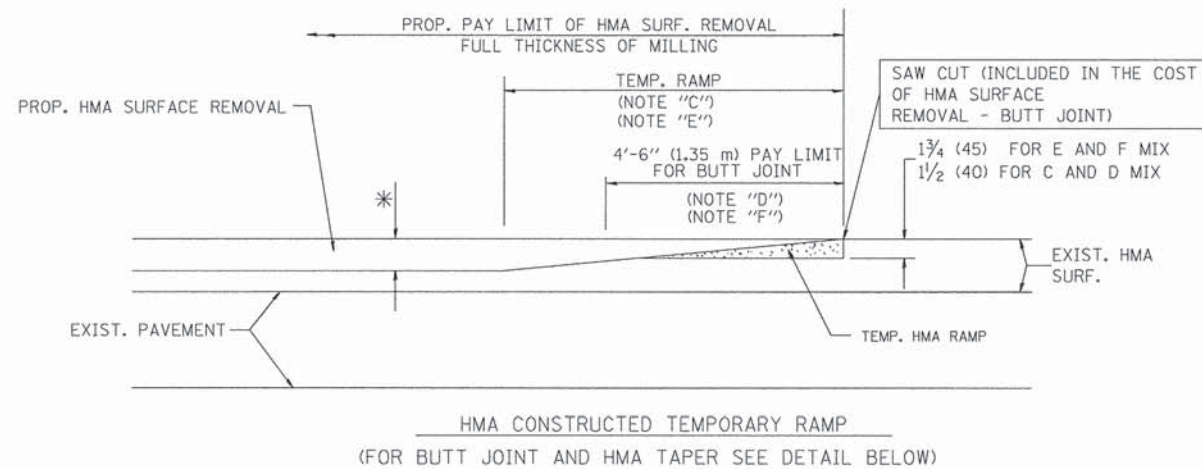


OPTION 2
TYPICAL TEMPORARY RAMP

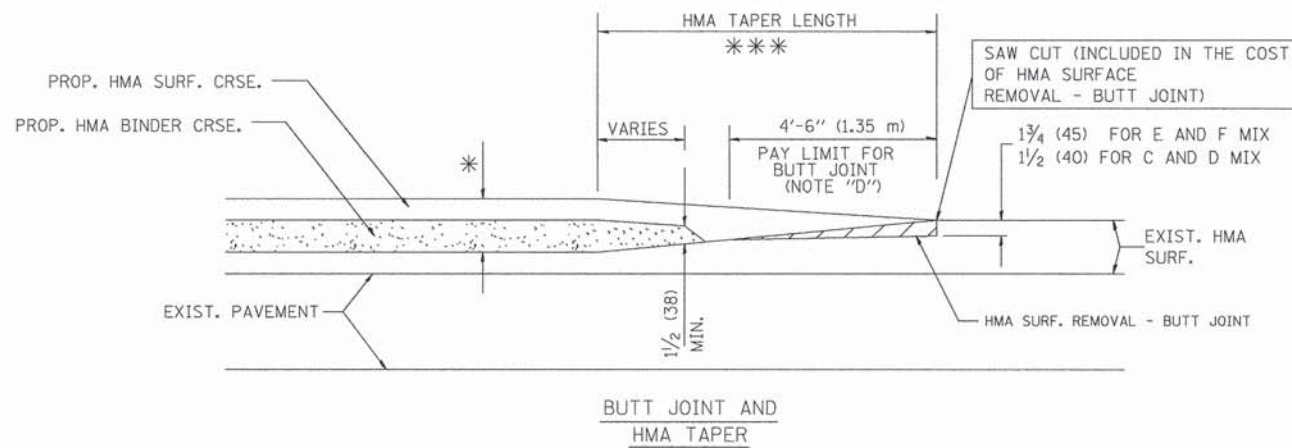

TYPICAL BUTT JOINT AND HMA TAPER
FOR MILLING AND RESURFACING

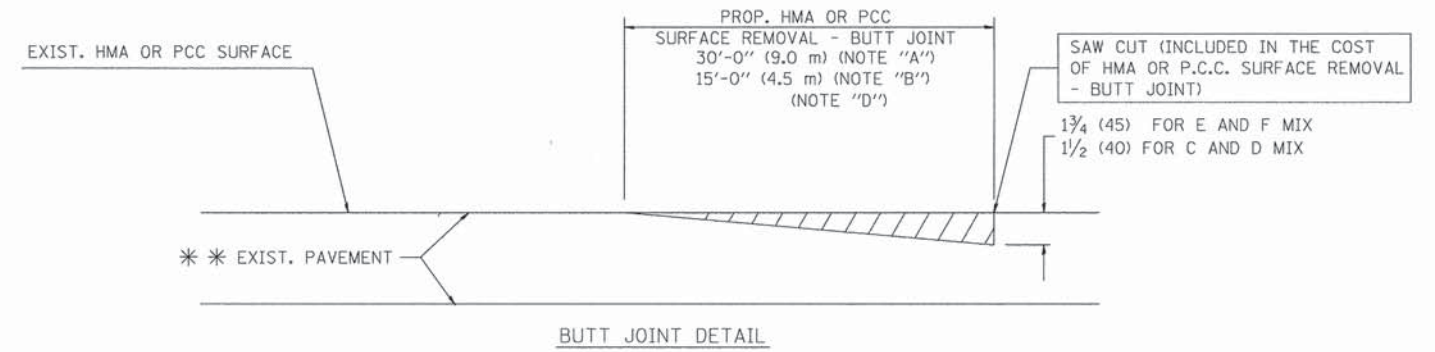

BUTT JOINT DETAIL

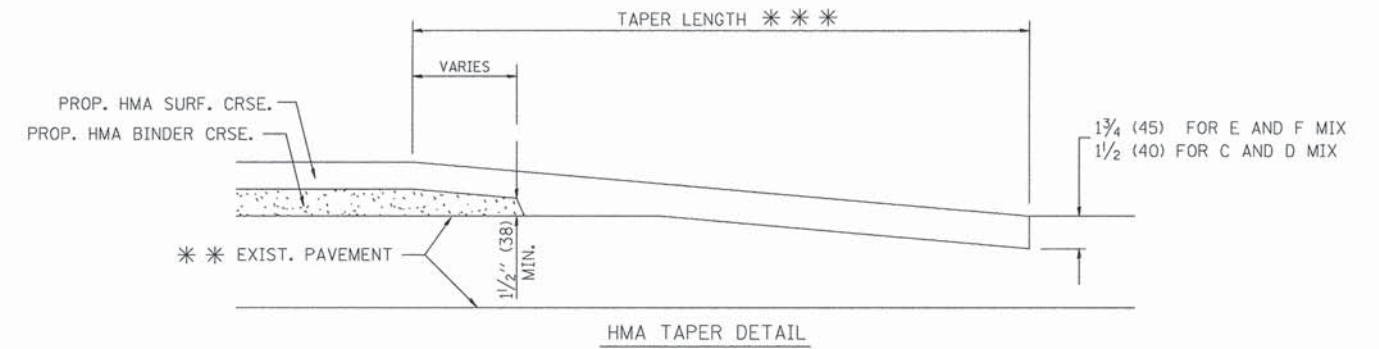

HMA TAPER DETAIL

TYPICAL BUTT JOINT AND HMA TAPER
FOR RESURFACING ONLY

*** PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".

* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

*** 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A")
10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME = W:\diststd\22x34\bd32.dgn


USER NAME = gaglianobt	DESIGNED - M. DE YONG	REVISED - R. SHAH 10-25-94
PLOT SCALE = 50.0000' / IN.	CHECKED -	REVISED - A. ABBAS 03-21-97
PLOT DATE = 1/4/2000	DATE - 06-13-90	REVISED - M. GOMEZ 04-06-01
		REVISED - R. BORO 01-01-07

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE
BUTT JOINT AND
HMA TAPER DETAILS

SCALE: NONE SHEET NO. 13 OF 21 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	13
BD400-05 BD32			CONTRACT NO. 61C51	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)				

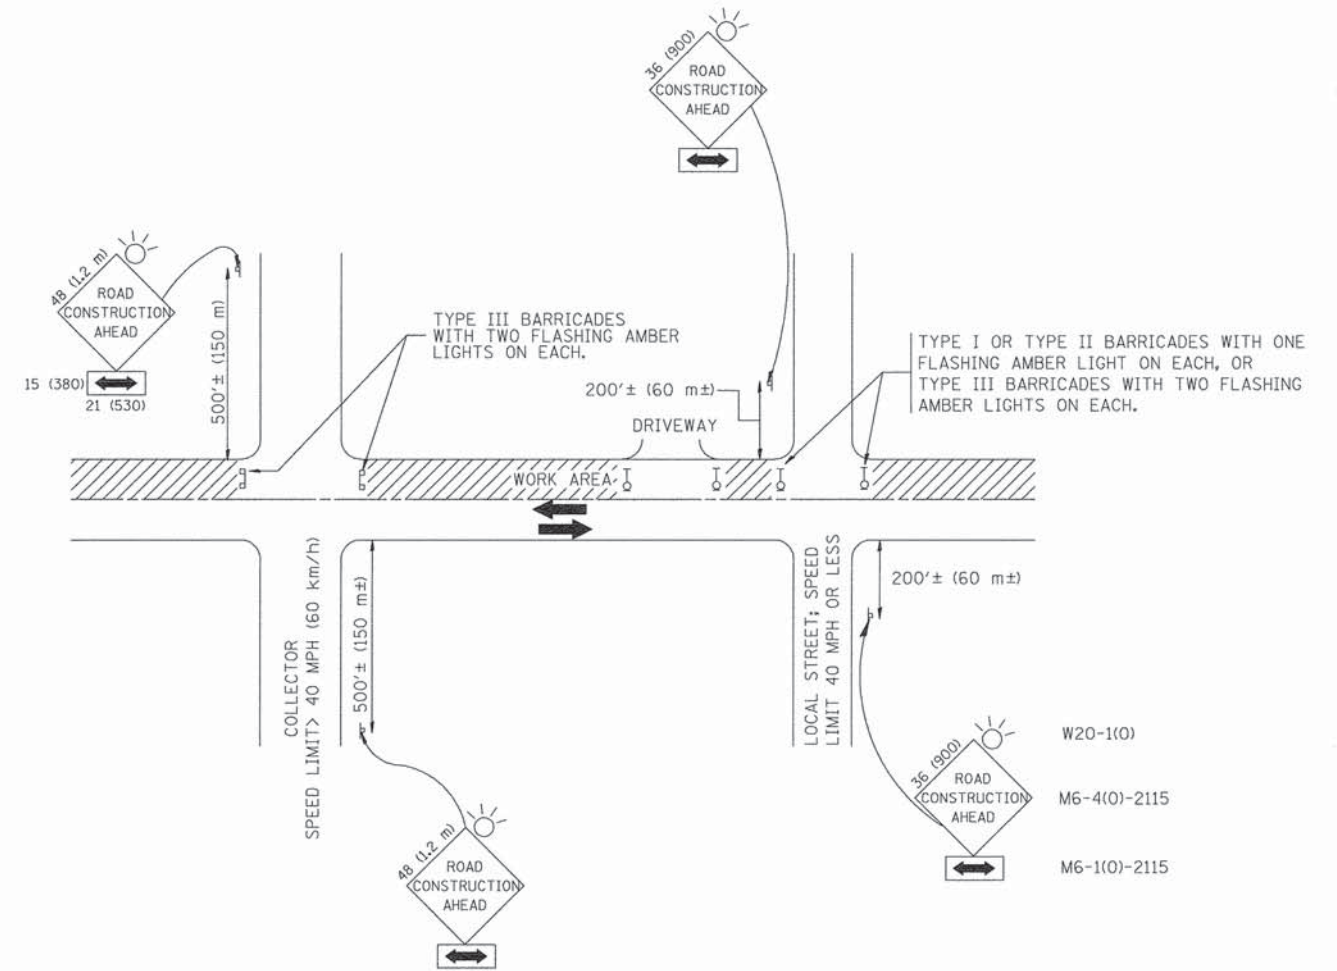

TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

NOTES:

A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS

1. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:

a) ONE **ROAD CONSTRUCTION AHEAD** SIGN 36 x 36 (900x900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE.

b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION.

2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:

a) ONE **ROAD CONSTRUCTION AHEAD** SIGN 48 x 48 (1.2 m x 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE.

b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION.

3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (M6-4).

B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:

USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES (STD. 701501, STD. 701606 OR THE APPROPRIATE STANDARD). THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE SIDE ROAD LANE CLOSURE.

C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.

D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in millimeters (inches) unless otherwise shown.


FILE NAME = W:\diststd\22x34\to10.dgn	USER NAME = gaglianobt	DESIGNED - LHA	REVISED - J. OBERLE 10-18-95
		DRAWN -	REVISED - A. HOUSEH 03-06-96
	PLDT SCALE = 50.000 "/ IN.	CHECKED -	REVISED - A. HOUSEH 10-15-96
	PLDT DATE = 1/4/2000	DATE - 06-89	REVISED - T. RAMMACHER 01-06-00

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


DISTRICT ONE
TRAFFIC CONTROL AND PROTECTION FOR
SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

SCALE: NONE SHEET NO. 14 OF 21 SHEETS STA. TO STA.


F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 14
TC-10		CONTRACT NO. 61C51		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)				

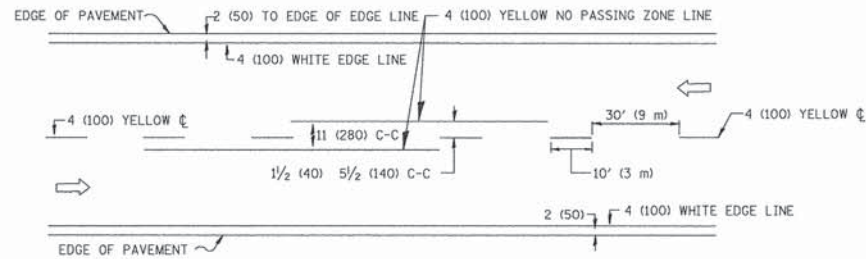

2-LANE ROADWAY

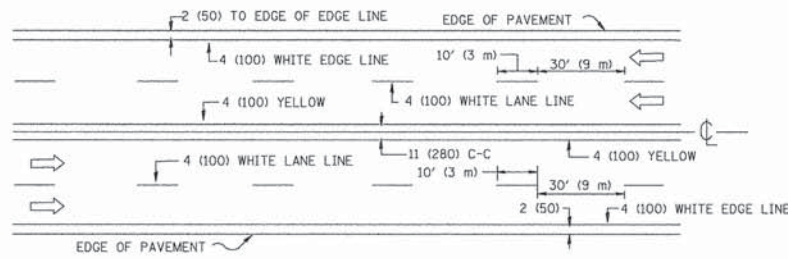


MULTI-LANE UNDIVIDED

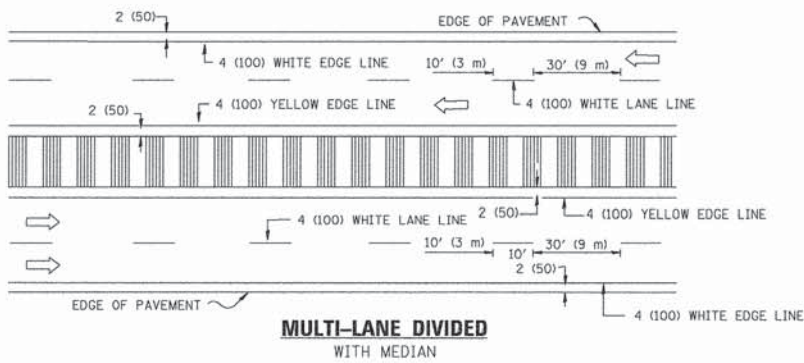

MULTI-LANE DIVIDED WITH MEDIAN

TYPICAL LANE AND EDGE LINE MARKING


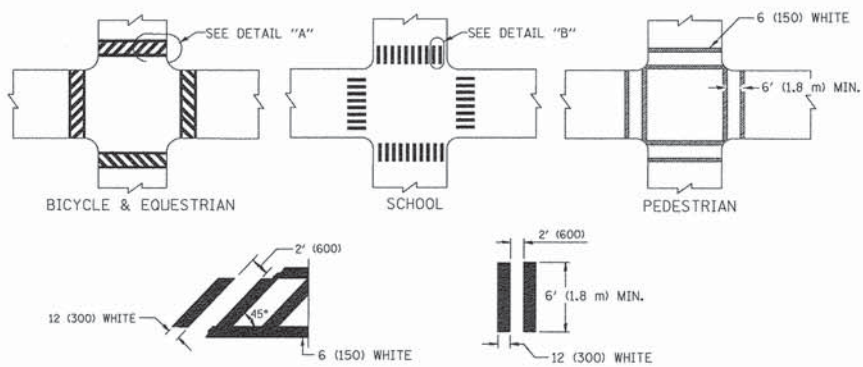


DETAIL "A"

DETAIL "B"


TYPICAL CROSSWALK MARKING

* MARKINGS SHALL BE INSTALLED PARALLEL TO THE CENTERLINE OF THE ROAD WHICH IT CROSSES

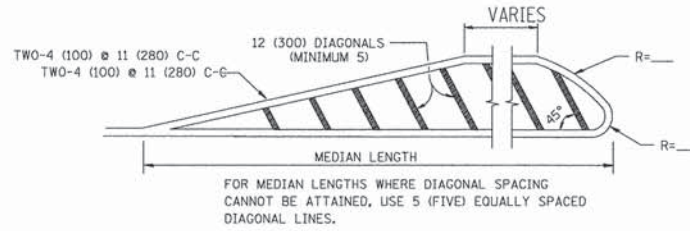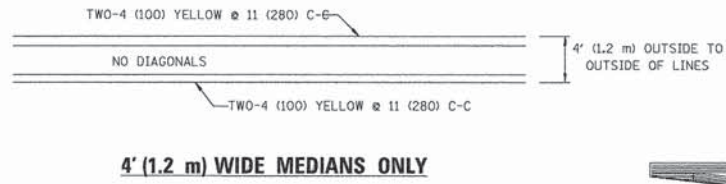

DIAGONAL LINE SPACING: 50' (15 m) C-C (LESS THAN 30MPH (50 km/h))
75' (25 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h)
150' (45 m) C-C (MORE THAN 45MPH (70 km/h))


MEDIANS OVER 4' (1.2 m) WIDE

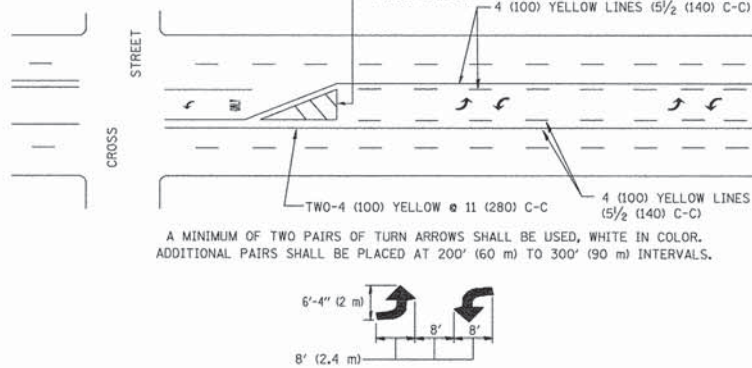

A MINIMUM OF TWO PAIRS OF TURN ARROWS SHALL BE USED, WHITE IN COLOR. ADDITIONAL PAIRS SHALL BE PLACED AT 200' (60 m) TO 300' (90 m) INTERVALS.

MEDIAN WITH TWO-WAY LEFT TURN LANE



TYPICAL PAINTED MEDIAN MARKING

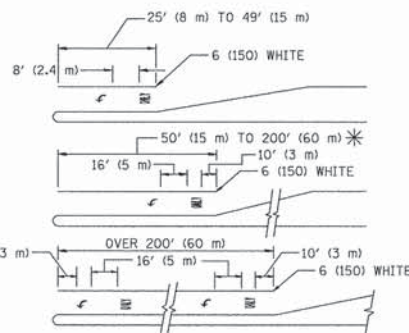


FULL SIZE LETTERS 8' (2.4 m) AND ARROWS SHALL BE USED.
AREA = 15.6 SQ. FT. (1.5 m²) ONLY AREA = 20.8 SQ. FT. (1.9 m²)
* TURN LANES IN EXCESS OF 400' (120 m) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW - "ONLY".

TYPICAL LEFT (OR RIGHT) TURN LANE


TYPICAL TURN LANE MARKING

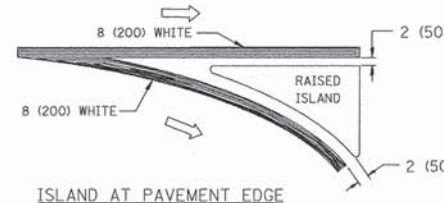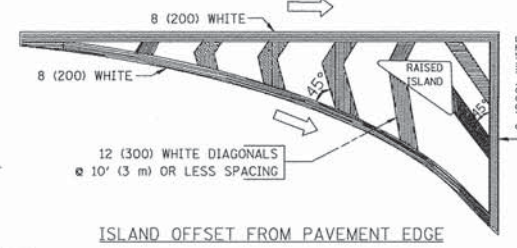

TYPICAL ISLAND MARKING

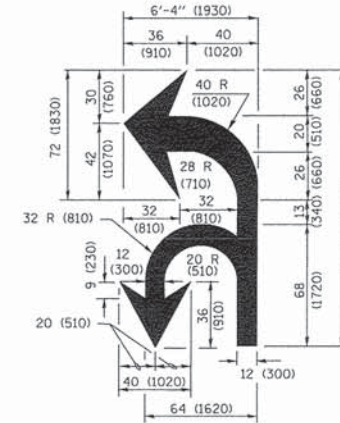

COMBINATION LEFT AND U-TURN



LANE REDUCTION TRANSITION

* LANE REDUCTION ARROWS REQUIRED AT SPEEDS OF 45 MPH OR GREATER OR WHEN SPECIFIED IN PLANS.

D(FT)	SPEED LIMIT
345	30
425	35
500	40
580	45
665	50
750	55

TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING /REMARKS
CENTERLINE ON 2 LANE PAVEMENT	4 (100)	SKIP-DASH	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE
CENTERLINE ON MULTI-LANE UNDIVIDED PAVEMENT	2 @ 4 (100)	SOLID	YELLOW	11 (280) C-C
NO PASSING ZONE LINES: FOR ONE DIRECTION FOR BOTH DIRECTIONS	4 (100) 2 @ 4 (100)	SOLID SOLID	YELLOW YELLOW	5/2 (140) C-C FROM SKIP-DASH CENTERLINE 11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN
LANE LINES	4 (100) 5 (125) ON FREEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE
DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS)	SAME AS LINE BEING EXTENDED	SKIP-DASH	SAME AS LINE BEING EXTENDED	2' (600) LINE WITH 6' (1.8 m) SPACE
EDGE LINES	4 (100)	SOLID	YELLOW-LEFT WHITE-RIGHT	OUTLINE MEDIANS IN YELLOW
TURN LANE MARKINGS	6 (150) LINE; FULL SIZE LETTERS & SYMBOLS (8' (2.4m))	SOLID	WHITE	SEE TYPICAL TURN LANE MARKING DETAIL
TWO WAY LEFT TURN MARKING	2 @ 4 (100) EACH DIRECTION 8' (2.4m) LEFT ARROW	SKIP-DASH AND SOLID IN PAIRS	YELLOW WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH; 5/2 (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL
CROSSWALK LINES (PEDESTRIAN) A. DIAGONALS (BIKE & EQUESTRIAN) B. LONGITUDINAL BARS (SCHOOL)	2 @ 6 (150) 12 (300) @ 45° 12 (300) @ 90°	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (600) APART 2' (600) APART SEE TYPICAL CROSSWALK MARKING DETAILS.
STOP LINES	24 (600)	SOLID	WHITE	PLACE 4' (1.2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT; OTHERWISE, PLACE AT DESIRED STOPPING POINT. PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE
PAINTED MEDIANS	2 @ 4 (100) WITH 12 (300) DIAGONALS @ 45° NO DIAGONALS USED FOR 4' (1.2 m) WIDE MEDIANS	SOLID	YELLOW; TWO WAY TRAFFIC WHITE; ONE WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE SEE TYPICAL PAINTED MEDIAN MARKING.
GORE MARKING AND CHANNELIZING LINES	8 (200) WITH 12 (300) DIAGONALS @ 45°	SOLID	WHITE	DIAGONALS: 15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h) 30' (9 m) C-C (OVER 45MPH (70 km/h))
RAILROAD CROSSING	24 (600) TRANSVERSE LINES; "RR" IS 6' (1.8 m) LETTERS; 16 (400) LINE FOR "X"	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R"=3.6 SQ. FT. (0.33 m ²) EACH "X"=54.0 SQ. FT. (5.0 m ²)
SHOULDER DIAGONALS (REQUIRED FOR SHOULDERS ≥ 8')	12 (300) @ 45°	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h)) 150' (45 m) C-C (OVER 45MPH (70 km/h))
U TURN ARROW	SEE DETAIL	SOLID	WHITE	16.3 SF
2 ARROW COMBINATION LEFT AND U TURN	SEE DETAIL	SOLID	WHITE	30.4 SF


FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = l1szkrf	DESIGNED - EVERS	REVISED - T. RAMMACHER 10-27-94
pw\l\084EBID\INTEG\illinois.gov\FWIDOT\Documents\DOT Offices\District 1\Projects\Dist 1\BIRM\CADData\CADsheet\td13.dgn			REVISED - C. JUCIUS 09-09-09
	PLOT SCALE = 50.000' / in.	CHECKED -	REVISED - C. JUCIUS 07-01-13
Default	PLOT DATE = 12/21/2015	DATE - 03-19-90	REVISED - C. JUCIUS 12-21-15

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DISTRICT ONE TYPICAL PAVEMENT MARKINGS		FAU. RITE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
SCALE: NONE		2403	14-0097-00-RS	COOK	21	15
SHEET NO. 15 OF 21 SHEETS		TC-13		CONTRACT NO. 61C51		
STA. TO STA.		FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT M-4003(426)		

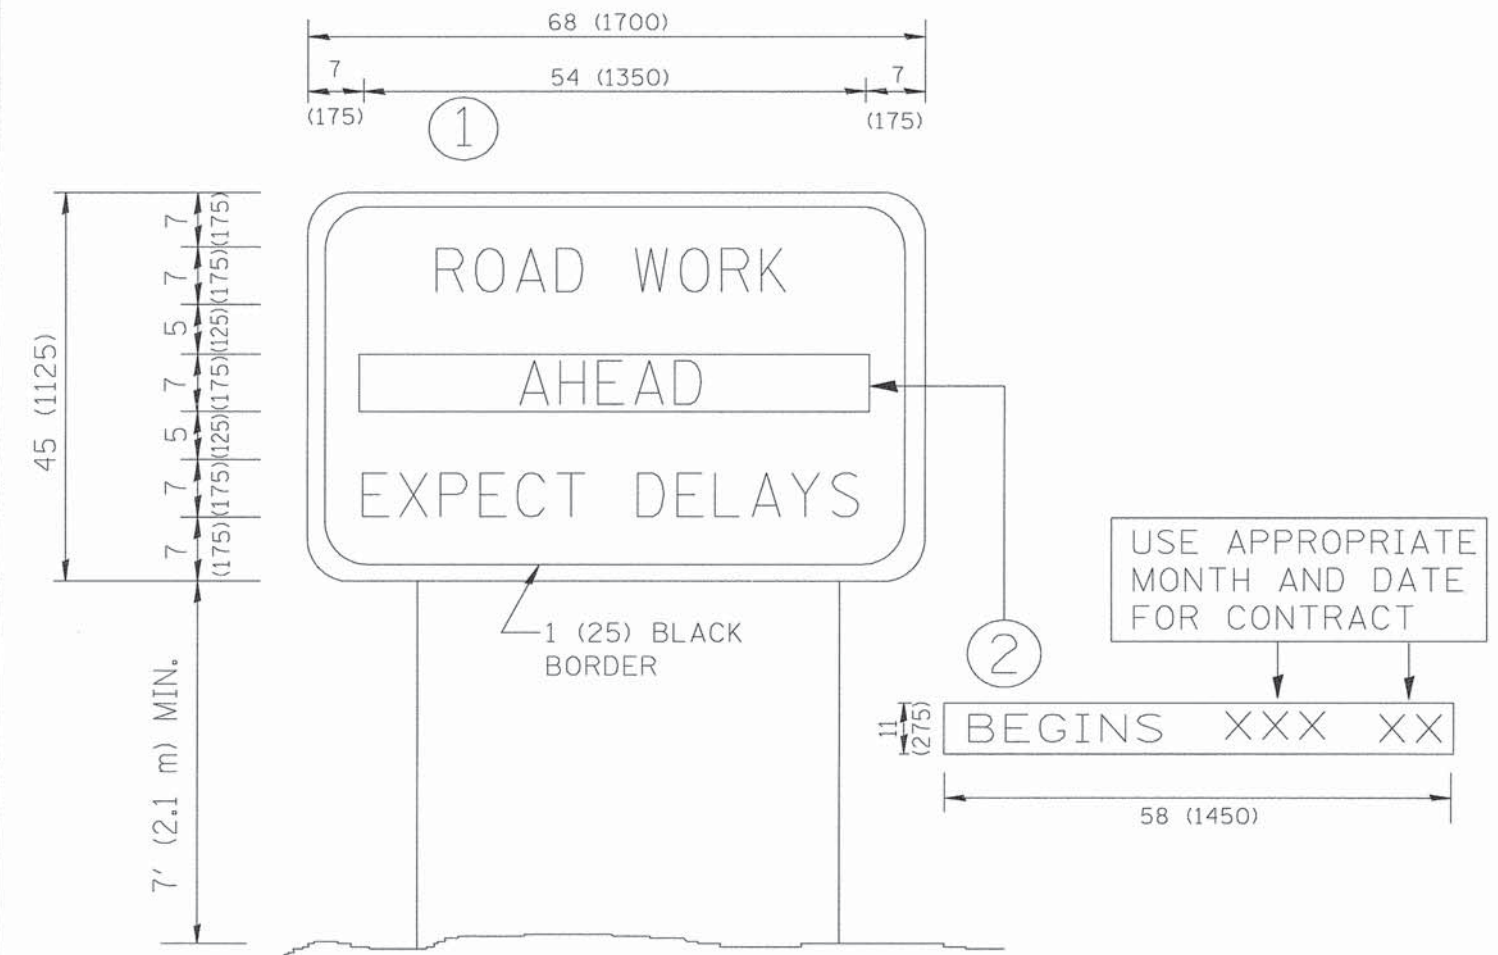

NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.


FILE NAME = W:\diststd\22x34\tc22.dgn	USER NAME = gaglianobt	DESIGNED - DRAWN -	REVISED - REVISED -
		REVISOR - CHECKED -	REVISOR - CHECKED -
		DATE -	DATE -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE ARTERIAL ROAD INFORMATION SIGN		F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 16
SCALE: NONE		SHEET NO. 16 OF 21 SHEETS		STA. TO STA.		FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)


LOOP DETECTOR NOTES

- EACH PAIR OF LOOP WIRES SHALL BE PLACED IN A SEPARATE EMPTY COILABLE NONMETALLIC CONDUIT FROM THE EDGE OF PAVEMENT TO THE HANDHOLE. SPACING BETWEEN THE HOLES DRILLED IN THE PAVEMENT SHALL NOT BE LESS THAN 6" (150 mm). EMPTY COILABLE NONMETALLIC CONDUIT SHALL BE INCLUDED IN THE COST OF THE LOOP WIRE.
- THE NUMBER OF LOOP TURNS SHALL BE AS RECOMMENDED BY THE AMPLIFIER MANUFACTURER. ALL ADJACENT SIDES OF THE LOOPS SHALL BE INSTALLED IN SUCH A WAY THAT THE CURRENT FLOW IS IN THE SAME DIRECTION TO REINFORCE ITS MAGNETIC FIELDS FOR SMALL VEHICLE DETECTION.
- EACH LOOP LEAD-IN SHALL BE IDENTIFIED AND PERMANENTLY TAGGED IN THE HANDHOLE. EACH LEAD-IN CABLE TAG SHALL INDICATE THE LOCATION OF THE LOOP, LOOP ROTATION (CLOCKWISE/COUNTERCLOCKWISE), LOOP LEAD-IN DIRECTION (IN OR OUT), LOOP CABLE NUMBER AND LOCATION IN CABINET, AND NUMBER OF TURNS IN THE DETECTOR LOOPS IN WATER PROOF INK AS INDICATED ON THE DISTRICT 1 STANDARD TRAFFIC SIGNAL DESIGN DETAIL. THE CONTRACTOR SHALL MARK LOOP LOCATIONS ON RECORD DRAWINGS AND PRESENT TO THE ENGINEER AFTER FINAL INSPECTION. LOOPS SHALL BE MARKED BY LANE AND LOOP NUMBER. SEE DETAIL BELOW.
- ALL LOOP CABLE SHALL BE FASTENED WITH PLASTIC TIE WRAP TO THE HANDHOLE HOOKS.
- IN ASPHALT PAVEMENT, LOOPS SHOULD BE PLACED IN THE BINDER AND DIVEHOLES MARKED AT THE CURB WITH A SAW-CUT. THE SAW-CUT SHALL BE CUT IN ACCORDANCE WITH LOCAL AND E.P.A. DUST CONTROL REQUIREMENTS. DETECTOR LOOP(S) SHALL NOT BE INSTALLED IN WET CONDITIONS AND THE SAW-CUTS MUST BE FREE OF DEBRIS AND RESIDUE SUCH AS DUST AND WATER WHICH IS TO BE ACHIEVED BY THE USE OF COMPRESSED AIR, WIRE BRUSHING AND HEAT DRYING ACCORDING TO SEALANT MANUFACTURER REQUIREMENTS. THE DETECTOR WIRE SHALL BE HELD IN PLACE BY THE USE OF FORM WEDGES. WEDGES SHALL BE SPACED NO MORE THAN 18" (450 mm) APART.
- LOOP SPLICES SHALL BE SOLDERED USING A SOLDERING IRON. BLOW TORCHES OR OTHER DEVICES WHICH OXIDIZE COPPER CABLE SHALL NOT BE ALLOWED FOR SOLDERING OPERATIONS. SEE DETAIL BELOW RIGHT.
- PERFORMED DETECTOR LOOPS SHALL BE USED, AS SHOWN ON THE PLANS, WHERE NEW CONCRETE PAVEMENT IS PROPOSED. THE INSTALLATION OF PERFORMED LOOPS SHALL BE IN ACCORDANCE WITH THE DISTRICT 1 SPECIFICATIONS OR AS DIRECTED BY THE ENGINEER.

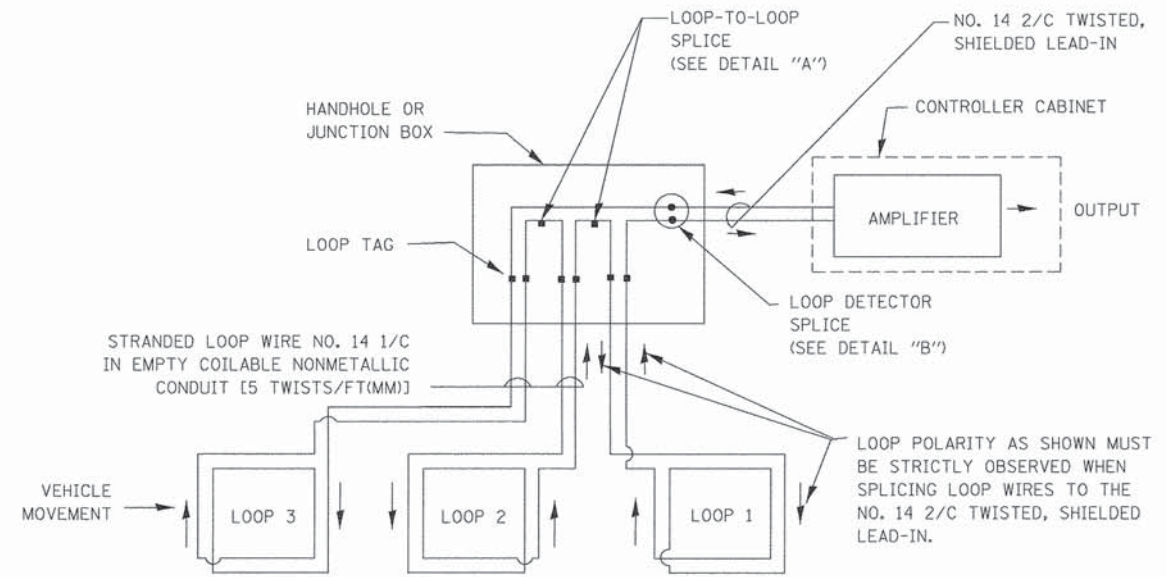


DETECTOR LOOP WIRING SCHEMATIC

- LOOPS SHALL BE SPLICED IN SERIES.
- SAW-CUTS SHALL BE A MINIMUM WIDTH OF 5/16" (8 mm).
- SAW-CUT DEPTHS SHALL BE 3" (75 mm). IF IN CONCRETE, THE SAW-CUT DEPTH SHALL BE TO THE TOP OF THE REINFORCEMENT.
- LOOP CORNERS SHALL BE DRILLED WITH A 2" (50 mm) DIAMETER CORE.

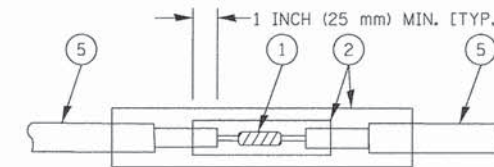


DETAIL "A"
LOOP-TO-LOOP SPLICE

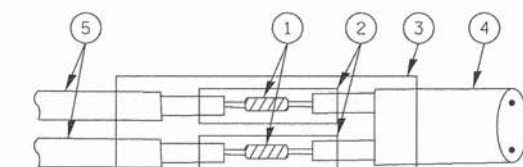


DETAIL "B"
LOOP-TO-CONTROLLER SPLICE

TYPE I LOOP


LOOP LEAD-IN CABLE TAG

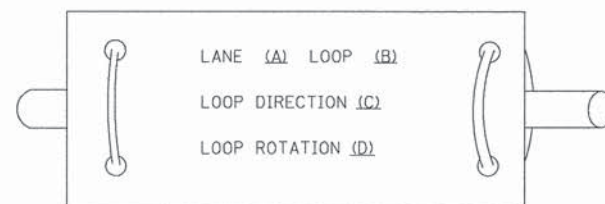

- LANE 1 IS THE LANE CLOSEST TO THE CENTERLINE OF THE ROADWAY
- LOOP #1 IS THE LOOP IN THE LANE CLOSEST TO THE INTERSECTION.
- LABEL LOOP CABLE "IN" OR LOOP CABLE "OUT".
- LABEL LOOP CABLE CLOCKWISE OR LOOP CABLE COUNTERCLOCKWISE.

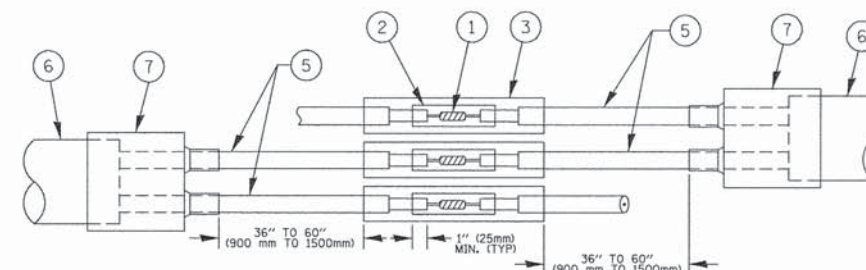

DETAIL "A"
LOOP-TO-LOOP SPLICE

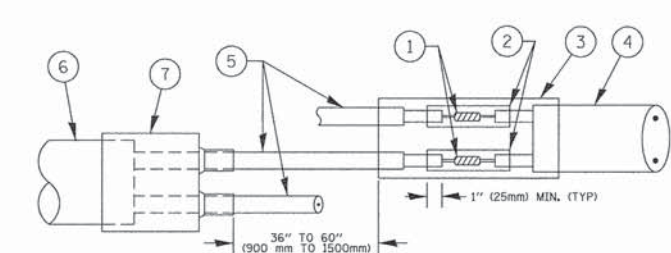

DETAIL "B"
LOOP-TO-CONTROLLER SPLICE


PRE-FORMED LOOP

LOOP DETECTOR SPLICE

- WESTERN UNION SPLICE SOLDERED WITH ROSIN CORE FLUX. ALL EXPOSED SURFACES OF THE SOLDER SHALL BE SMOOTH. THE WESTERN UNION SPLICES SHALL BE STAGGERED.
- WCSMW 30/100 HEAT SHRINK TUBE, MINIMUM LENGTH 3" (75 mm), UNDERWATER GRADE.
- WCS 200/750 HEAT SHRINK TUBE, MINIMUM LENGTH 6" (150 mm), UNDERWATER GRADE.
- NO. 14 2/C TWISTED, SHIELDED CABLE.
- LOOP CONDUCTOR WITH FLEXIBLE PLASTIC TUBE.
- PRE-FORMED LOOP
- XL POLYOLEFIN 2 CONDUCTOR BREAKOUT SEALS. TYCO CBR-2 OR APPROVED EQUAL

LOOPS NEXT TO SHOULDERS

PROVIDE A PAVEMENT REPLACEMENT NOTE WHICH SHOULD EQUAL 3' (900 mm) X WIDTH OF PAVED SHOULDER.

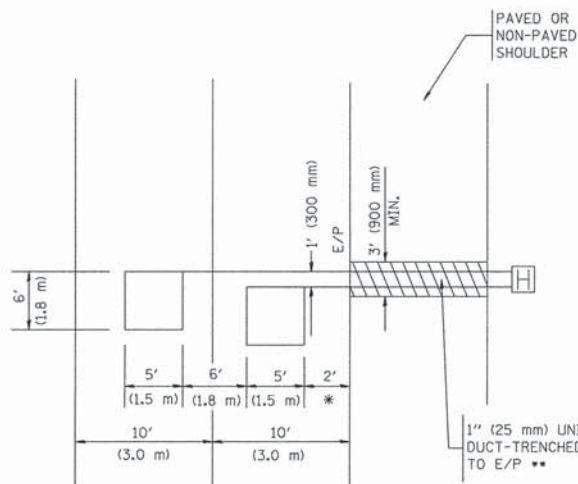


* = (600 mm)

** UNIT DUCT IS TO BE SHOWN ON PLAN SHEETS BUT SHALL NOT BE INCLUDED IN THE PAY ITEMS.

LEFT TURN LANES WITH MEDIANS
VOLUME DENSITY ("FAR OUT" DETECTION)
ON SAME APPROACH
(PROTECTED / PERMITTED LEFT TURN PHASING)


HANDHOLE LOCATION MAY VARY DEPENDING ON GEOMETRICS AND DESIGN OF TRAFFIC SIGNALS. HEAVY-DUTY HANDHOLES TO BE USED WHEN THE MEDIAN IS MOUNTABLE. REFER TO STANDARD 814001 TO ENSURE THAT HANDHOLE FITS IN MEDIAN.

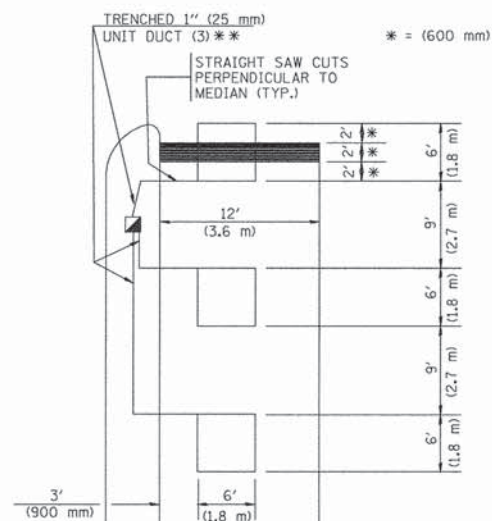

** UNIT DUCT IS TO BE SHOWN ON PLAN SHEETS BUT SHALL NOT BE INCLUDED IN THE PAY ITEMS.


NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO PLAN SHEET FOR DETECTOR LOOP REPLACEMENT

LEFT TURN LANES WITHOUT MEDIANS
VOLUME DENSITY ("FAR OUT" DETECTION)
ON SAME APPROACH
(PROTECTED / PERMITTED LEFT TURN PHASING)

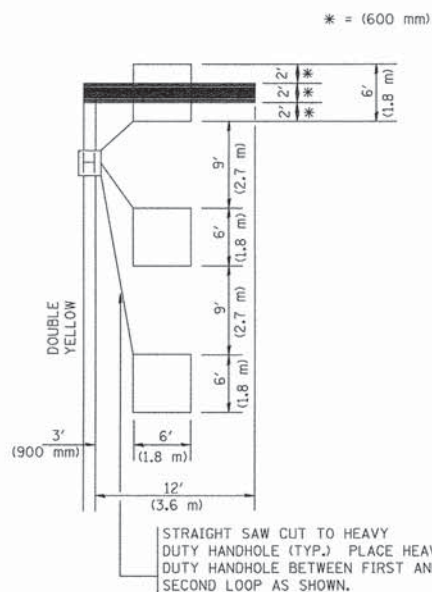


NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO PLAN SHEET FOR DETECTOR LOOP REPLACEMENT

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION)
CROSS STREET-VOLUME DENSITY ("FAR OUT" DETECTION)

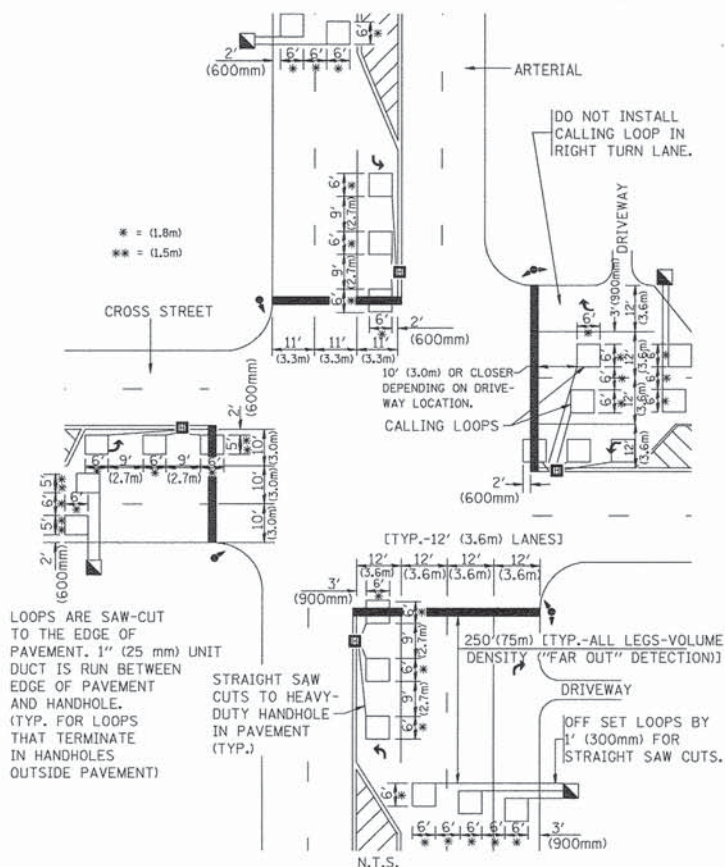

DETAIL 1
N.T.S.

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION)
CROSS STREET-NON VOLUME DENSITY ("UPTIGHT" PRESENCE DETECTION)

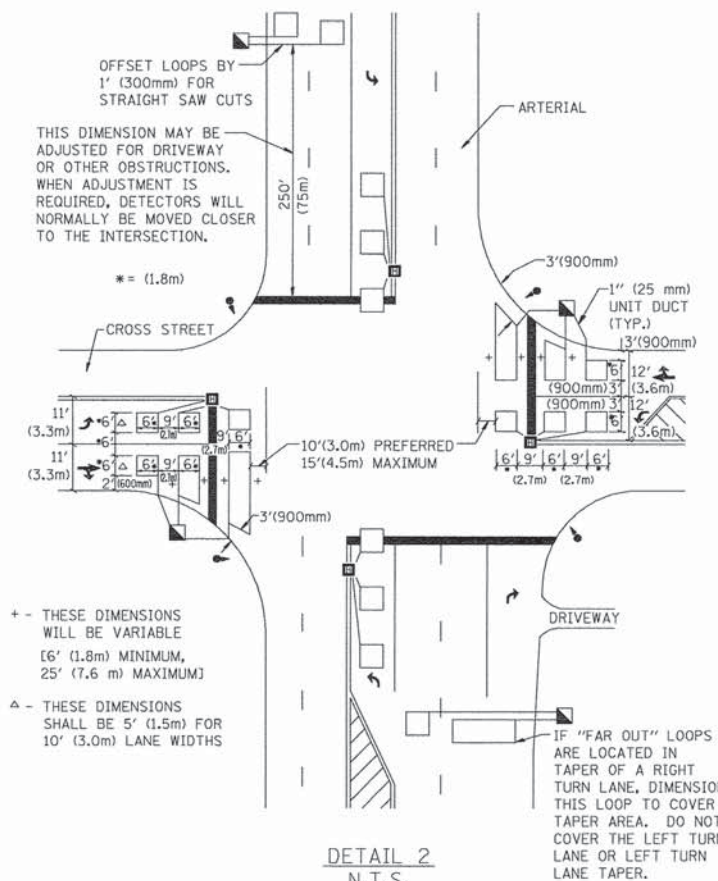

DETAIL 2
N.T.S.

NOTES:

VEHICLES LOOP DETECTORS

- * ALL LEAD IN CABLE SHALL BE TWO CONDUCTOR NO. 14 TWISTED, SHIELDED.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN SAW CUT FROM THE LOOP TO THE EDGE OF PAVEMENT OR TO A HANDHOLE IN THE PAVEMENT.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN ONE INCH (25 mm) UNIT DUCT BETWEEN THE EDGE OF PAVEMENT AND THE FIRST HANDHOLE OR JUNCTION BOX. EACH UNIT DUCT RUN SHALL BE SHOWN ON THE PLANS BY THE DESIGNER, BUT SHALL NOT BE PAID FOR SEPARATELY. THIS ITEM IS INCIDENTAL TO THE PAY ITEM FOR DETECTOR LOOPS.
- * ONE DIMENSION OF ALL DETECTOR LOOPS SHALL BE SIX FEET (1.8 m)
- * EACH LANE OF NON-LOCKING, PRESENCE DETECTION AND EACH LANE OF A DOUBLE LEFT TURN LANE REQUIRES A SEPARATE INDUCTIVE LOOP DETECTOR AND LEAD IN CABLE.
- * WHEN NON-LOCKING, PRESENCE DETECTION IS USED, MORE THAN ONE LOOP PER LANE IS REQUIRED BEHIND THE STOP BAR (i.e. 1-1/2, 1-3/4, 2).
- * WHEN SYSTEM LOOPS ARE REQUIRED ON AN APPROACH OF AN INTERSECTION, THE LOOPS USED FOR VOLUME DENSITY AND INTERSECTION TIMING SHALL ALSO BE USED AS SYSTEM DETECTORS. EACH ONE OF THESE TYPE OF LOOPS REQUIRES A SEPARATE TWO CONDUCTOR NO. 14 TWISTED SHIELDED CABLE AND A SEPARATE INDUCTIVE LOOP DETECTOR WHEN NEW CONTROLLERS ARE UTILIZED. THE DESIGNER SHALL LABEL THESE TYPES OF LOOPS AS "INTERSECTION AND SAMPLING (SYSTEM) DETECTORS" ON THE SIGNAL LAYOUT, THE INTERCONNECT PLAN AND THE SYSTEM CABLE PLAN. WHEN AN EXISTING CONTROLLER IS UTILIZED FOR THIS TYPE OF DETECTION, THE PAY ITEM "INDUCTIVE LOOP DETECTOR WITH SYSTEM OUTPUT" SHOULD BE USED.

PLACEMENT OF DETECTORS

THE FOLLOWING FIGURES REPRESENT THE MOST COMMON DETECTOR LOOP LOCATIONS AND SIZES. ADJUSTMENTS WILL BE NECESSARY FOR SPECIFIC GEOMETRIC CONSIDERATIONS.

LOCATIONS AND DEMENSIONS OF DETECTOR LOOPS ARE REQUIRED ON ALL SIGNAL LAYOUT PLAN SHEETS.

"FAR OUT" DETECTION REFERS TO LOCKING, PRESENCE TYPE DETECTION LOCATED IN THRU LANES, RIGHT TURN LANES, AND RIGHT TURN LANE TAPER AREAS (IF APPLICABLE), USUALLY 250' (75 m) IN ADVANCE OF STOP BARS. "UPTIGHT" DETECTION REFERS TO NON-LOCKING PRESENCE TYPE DETECTION LOCATED IN ALL LANES AND 10'-15' (3.0 m-4.5 m) BEHIND THE CROSSING STREET'S EDGE OF PAVEMENT EXTENDED.

NOTE:

ALL DETAILS AND NOTES SHOWN ARE FROM THE I.D.O.T. DISTRICT 1 TRAFFIC SIGNAL DESIGN GUIDELINES DATED JANUARY 1995

THIS DRAWING HAS BEEN PREPARED TO ASSIST THE RESIDENT ENGINEER FOR ALL ROADWAY RESURFACING OR S.M.A.R.T. PROJECTS WHERE THE DIMENSIONS ARE NOT SHOWN ON THE PLANS AND THE FINAL LOCATIONS FOR CROSSWALKS OR STOP BARS ARE NOT DETERMINED.

FILE NAME = W:\diststd\22x34\ts07.dgn

USER NAME = gaglianobt
DESIGNED -
DRAWN -
PLOT SCALE = 50.0000' / IN.
PLOT DATE = 1/4/2008

CHECKED - R.K.F.
DATE -


REVISED -
REVISED -
REVISED -
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE
DETECTOR LOOP INSTALLATION
DETAILS FOR ROADWAY RESURFACING


SCALE: NONE SHEET NO. 18 OF 21 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	18
TS-07		CONTRACT NO. 61C51		
FED. ROAD DIST. NO. 1		ILLINOIS FED. AID PROJECT M-4003(426)		

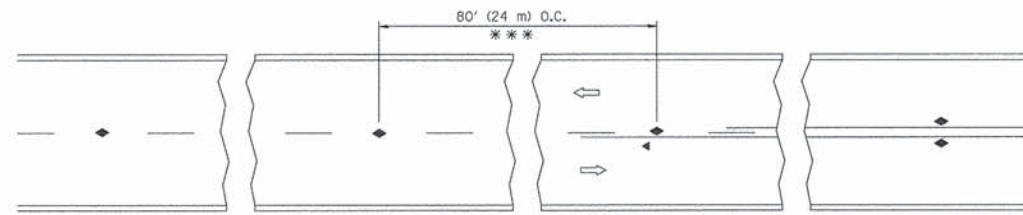


*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

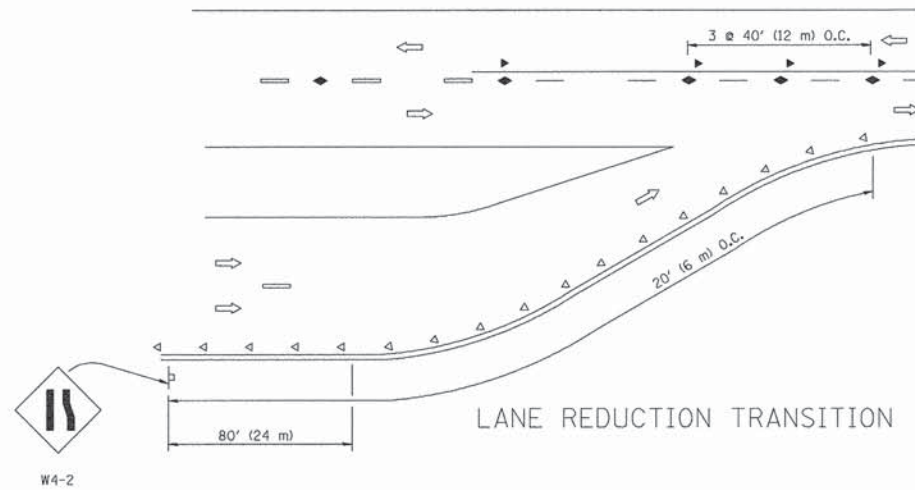


LANE REDUCTION TRANSITION

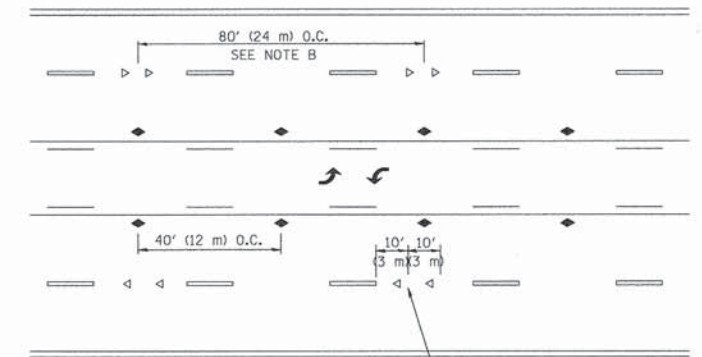


SEE NOTE A

TWO-WAY LEFT TURN

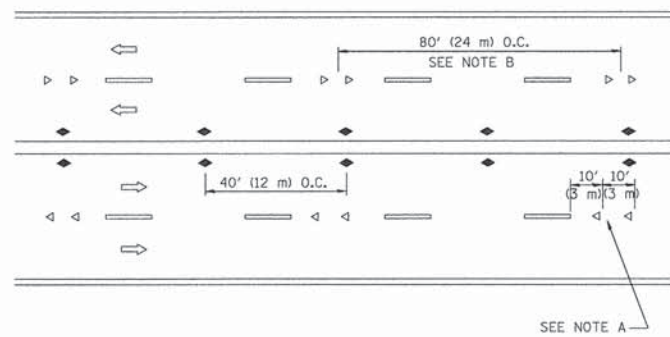

MULTI-LANE/UNDIVIDED

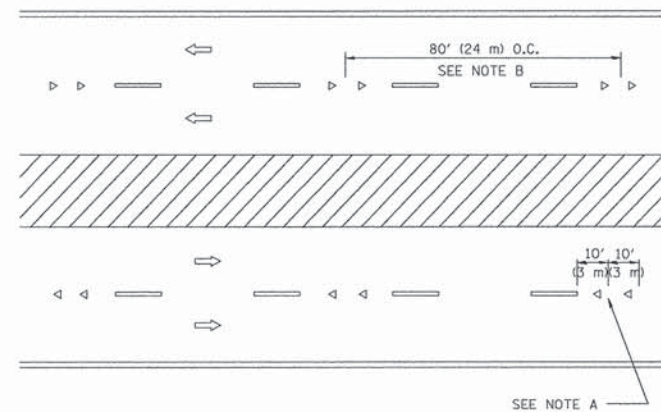

MULTI-LANE/DIVIDED

GENERAL NOTES

1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

SYMBOLS


- YELLOW STRIPE
- WHITE STRIPE
- ◀ ONE-WAY AMBER MARKER
- ◁ ONE-WAY CRYSTAL MARKER (W/O)
- ◆ TWO-WAY AMBER MARKER

LANE MARKER NOTES

- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H. (20 km/h) LOWER THAN POSTED SPEEDS.

DESIGN NOTES

1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHALL BE INCLUDED IN THE PLANS WHEN STANDARD SPECIFICATIONS ARE NOT BEING USED.
4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

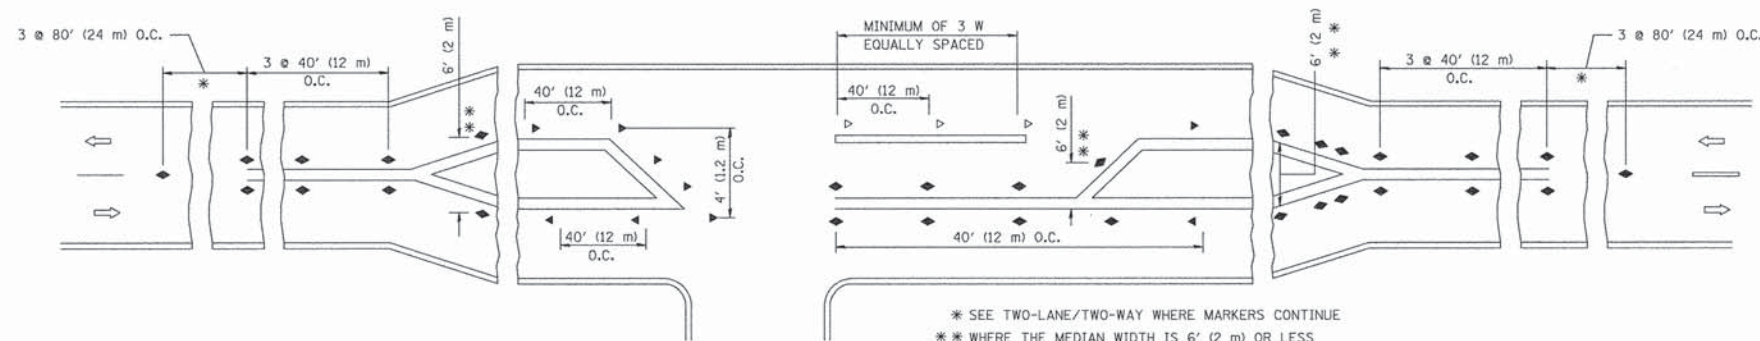

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = lsgso	DESIGNED -	REVISED - T. RAMMACHER 09-19-94
ct:\pw\work\pwsdot\lsgso\d0108315\td11.dgn		DRAWN -	REVISED - T. RAMMACHER 03-12-99
		CHECKED -	REVISED - T. RAMMACHER 01-06-00
		DATE -	REVISED - C. JUCIUS 09-09-09


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE
RAISED REFLECTIVE PAVEMENT MARKERS

SCALE: NONE SHEET NO. 19 OF 21 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2403	14-00097-00-RS	COOK	21	19
TC-11		CONTRACT NO. 61C51		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT M-4003(426)		

QUANTITY	UNIT	ESTIMATED BILL OF MATERIAL
2	EACH	LIGHT DETECTOR
1	EACH	LIGHT DETECTOR AMPLIFIER
280	FOOT	ELECTRIC CABLE IN CONDUIT, SIGNAL, NO. 14 3C
280	FOOT	ELECTRIC CABLE IN CONDUIT, NO. 20 3/C, TWISTED, SHIELDED

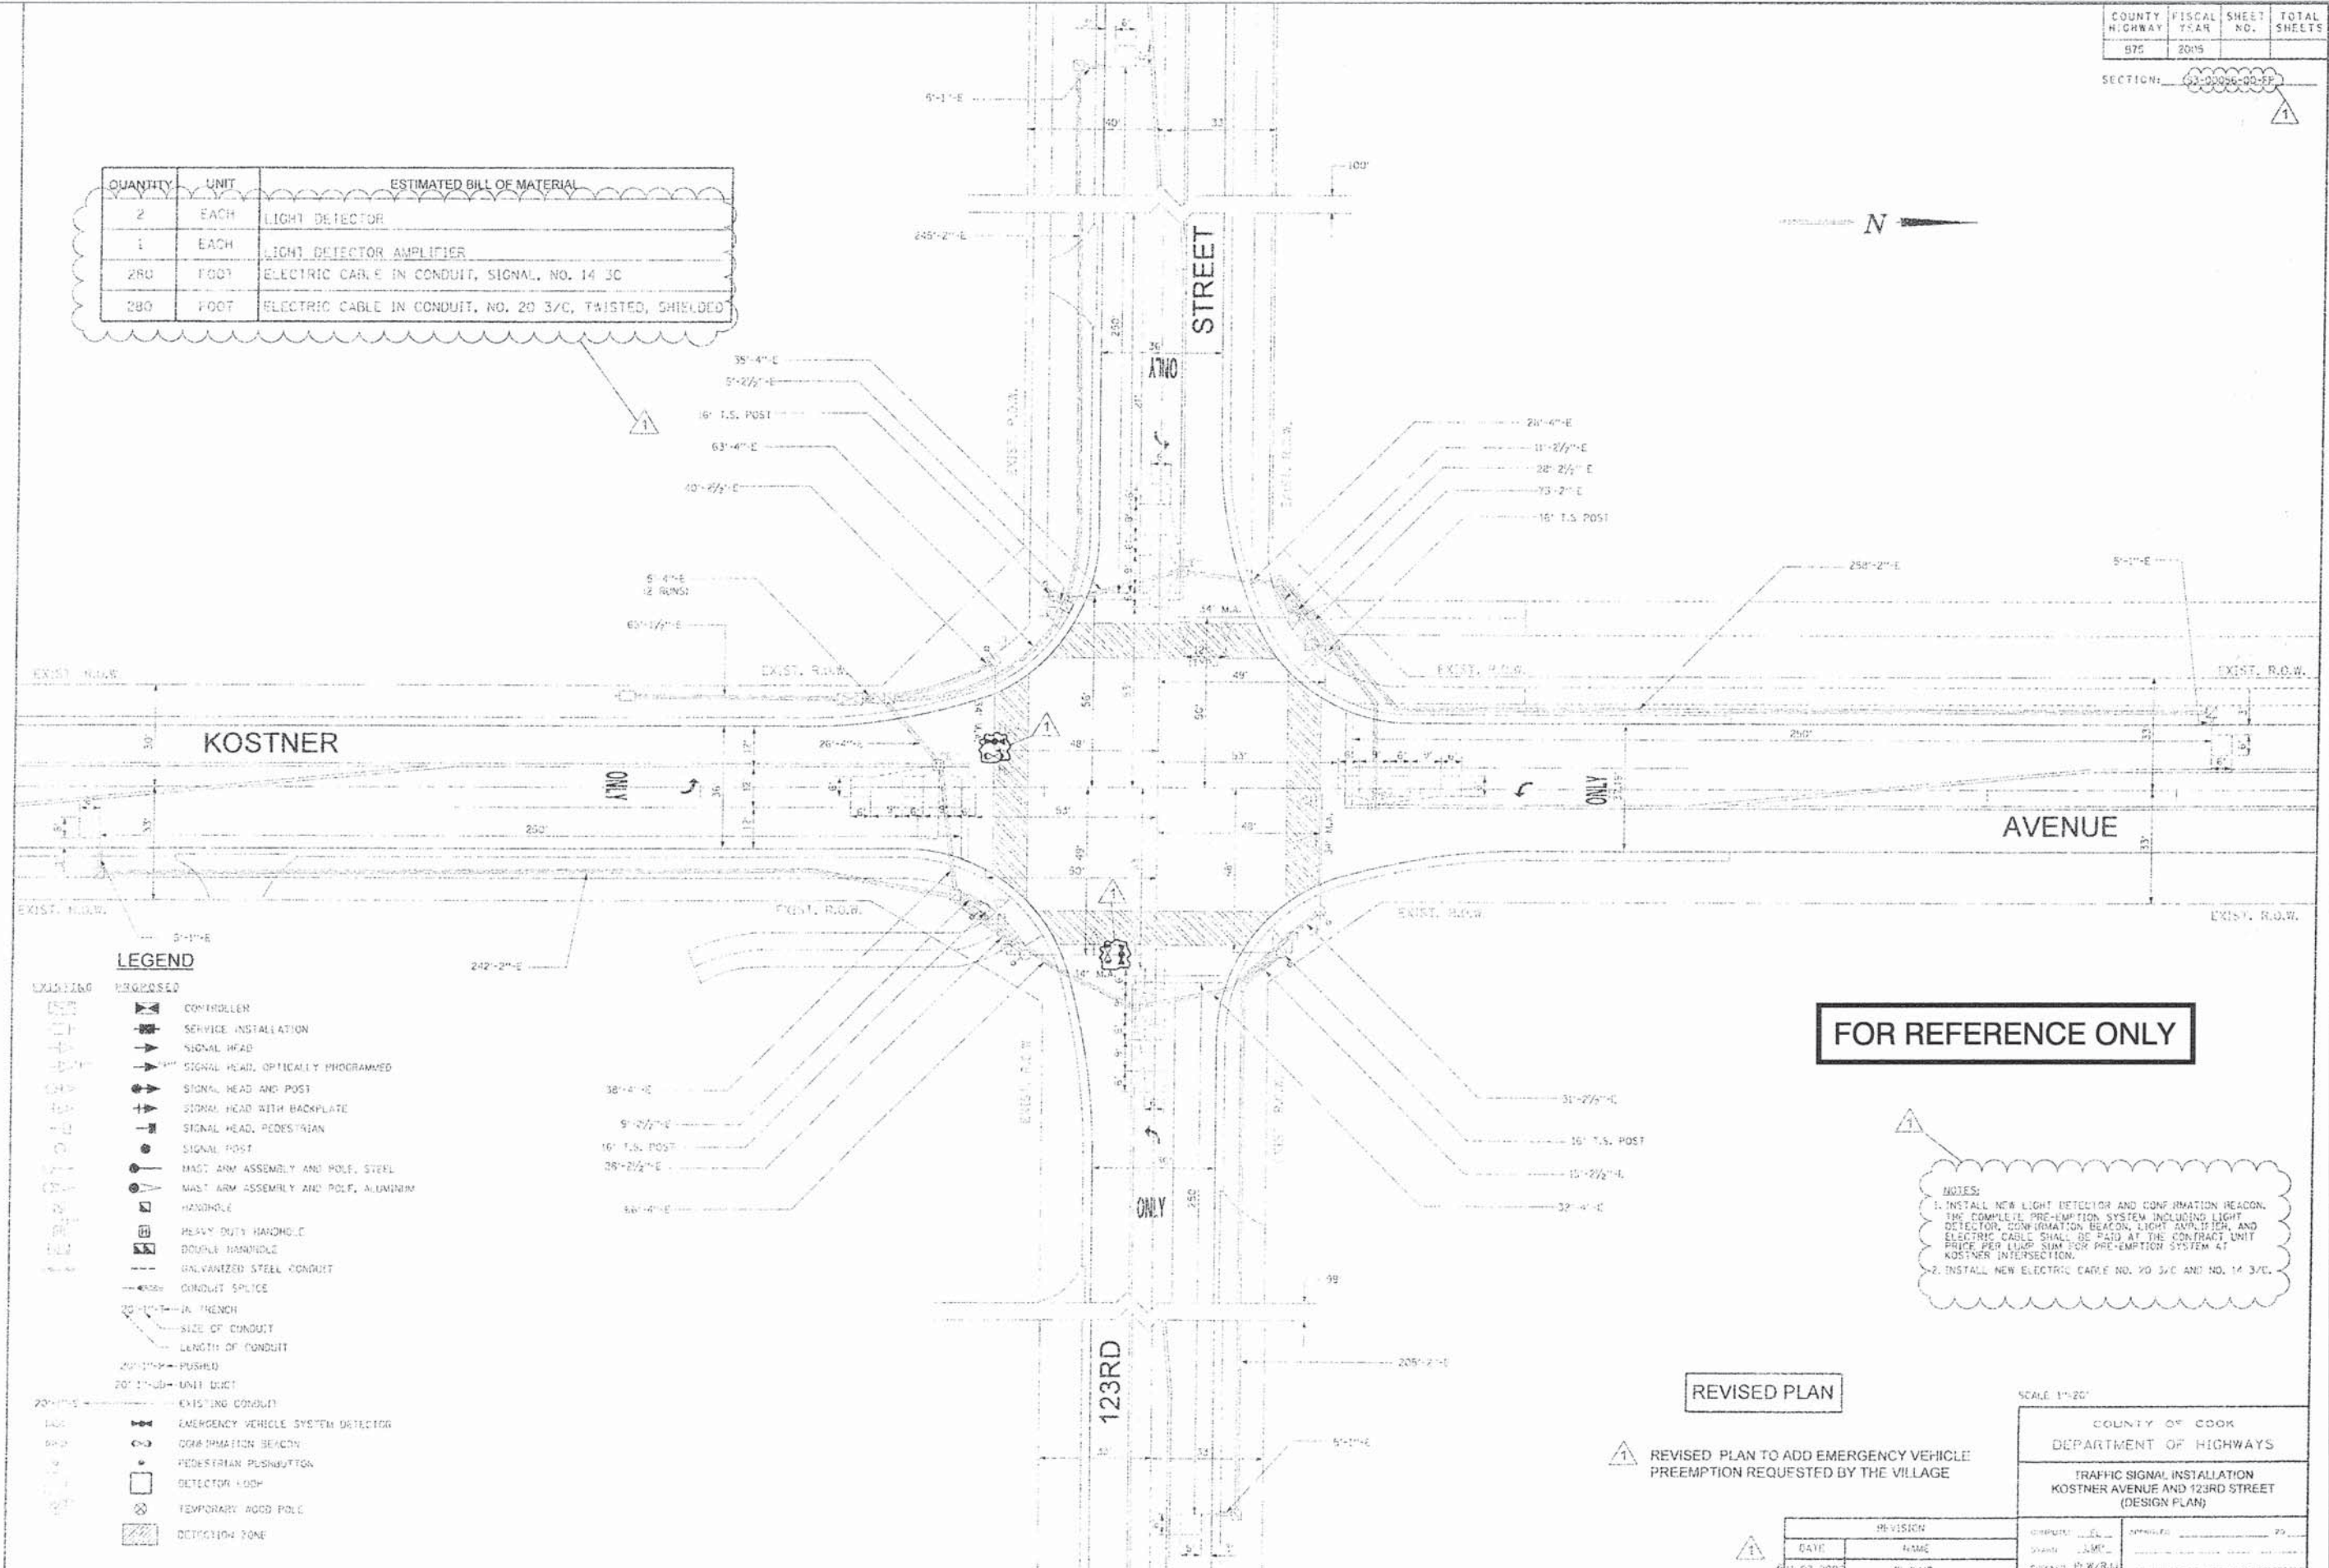

LEGEND

- | | | | |
|--|-----------------|--|--------------------------------------|
| | EXISTING | | PROPOSED |
| | | | CONTROLLER |
| | | | SERVICE INSTALLATION |
| | | | SIGNAL HEAD |
| | | | SIGNAL HEAD, OPTICALLY PROGRAMMED |
| | | | SIGNAL HEAD AND POST |
| | | | SIGNAL HEAD WITH BACKPLATE |
| | | | SIGNAL HEAD, PEDESTRIAN |
| | | | SIGNAL POST |
| | | | MAST ARM ASSEMBLY AND POLE, STEEL |
| | | | MAST ARM ASSEMBLY AND POLE, ALUMINUM |
| | | | HANDLE |
| | | | HEAVY DUTY HANDLE |
| | | | DOUBLE HANDLE |
| | | | GALVANIZED STEEL CONDUIT |
| | | | CONDUIT SPLICE |
| | | | TRENCH |
| | | | SIZE OF CONDUIT |
| | | | LENGTH OF CONDUIT |
| | | | 20' PUSH-IN CONDUIT |
| | | | 20' PULL-IN CONDUIT |
| | | | EXISTING CONDUIT |
| | | | EMERGENCY VEHICLE SYSTEM DETECTOR |
| | | | CONFIRMATION BEACON |
| | | | PEDESTRIAN PUSHBUTTON |
| | | | DETECTOR FLUSH |
| | | | TEMPORARY ROAD POLE |
| | | | DETECTION ZONE |

FOR REFERENCE ONLY

NOTES:
 1. INSTALL NEW LIGHT DETECTOR AND CONFIRMATION BEACON. THE COMPLETE PRE-EMPTION SYSTEM INCLUDING LIGHT DETECTOR, CONFIRMATION BEACON, LIGHT AMPLIFIER, AND ELECTRIC CABLE SHALL BE PAID AT THE CONTRACT UNIT PRICE PER LEAD SUM FOR PRE-EMPTION SYSTEM AT KOSTNER INTERSECTION.
 2. INSTALL NEW ELECTRIC CABLE NO. 20 3/C AND NO. 14 3/C.

REVISED PLAN

1. REVISED PLAN TO ADD EMERGENCY VEHICLE PREEMPTION REQUESTED BY THE VILLAGE


SCALE: 1"=20'

COUNTY OF COOK
 DEPARTMENT OF HIGHWAYS


TRAFFIC SIGNAL INSTALLATION
 KOSTNER AVENUE AND 123RD STREET
 (DESIGN PLAN)

DATE	NAME	STATUS	DATE	NAME	STATUS
11-07-2003	FL/MP	DESIGNED			

EXISTING CONTROLLER SEQUENCE

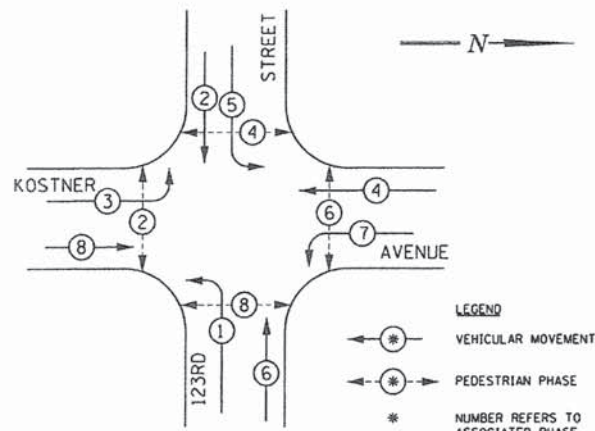


EXISTING EMERGENCY VEHICLE PREEMPTION SEQUENCE

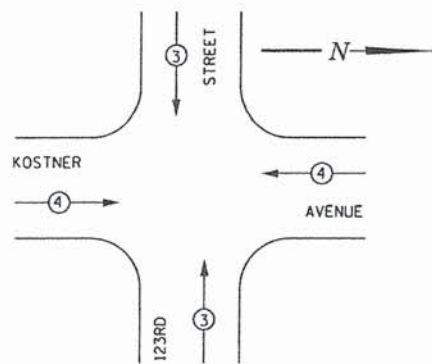

EXISTING EMERGENCY VEHICLE PREEMPTOR		
EMERGENCY VEHICLE PREEMPTOR	3	4
MOVEMENT		==

- NOTE:**
- THIS IS A SYSTEM GROUND THAT SHALL INTERCONNECT ALL GROUND RODS WITH NO. 6 IC SOLID COPPER AWG.
 - THE NEUTRAL AND GROUND SHALL BE TIED AT THE SERVICE INSTALLATION, BUT SHALL BE SEPARATED AT THE TRAFFIC SIGNAL CABINET.

SIGNAL FACES

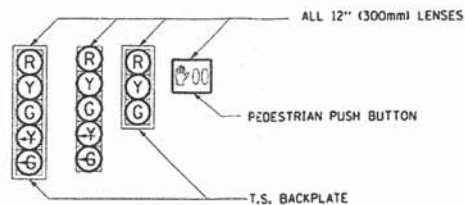


SIGNAL LENSES

- R RED
- Y YELLOW
- G GREEN
- Y- YELLOW TURN INDICATOR
- G- GREEN TURN INDICATOR

CABLE PLAN LEGEND

	PROPOSED	EXISTING
CONTROLLER CABINET		
SERVICE INSTALLATION		
8" (200mm) TRAFFIC SIGNAL SECTION		
12" (300mm) TRAFFIC SIGNAL SECTION		
12" (300mm) PEDESTRIAN SIGNAL SECTION		
DENOTES NUMBER OF CONDUCTORS ALL CABLE NO. 14 EXCEPT AS INDICATED. ALL LOOP DETECTOR CABLE TO BE TWISTED AND SHIELDED.		
TELEPHONE INSTALLATION		
VEHICLE DETECTOR, INDUCTION LOOP		
SHIELDED & TWISTED		
EMERGENCY VEHICLE LIGHT DETECTOR		
CONFIRMATION BEACON		
OPTICOM CABLE, NO. 20		
12" (300mm) PEDESTRIAN SIGNAL HEAD		
PUSHBUTTON DETECTOR		
SIGNAL FACE WITH BACKPLATE, "R" INDICATES PROGRAMMED HEAD.		
GROUND ROD AT HANDHOLE (H), DOUBLE HANDHOLE (H), CONTROLLER (C), SERVICE (S), POST (P), OR MAST ARM POLE (MA).		
UNINTERRUPTIBLE POWER SUPPLY		
16" (406mm) x 18" (457mm) PEDESTRIAN COUNTDOWN SIGNAL HEAD		
"R" INDICATES RETROFIT LED.		

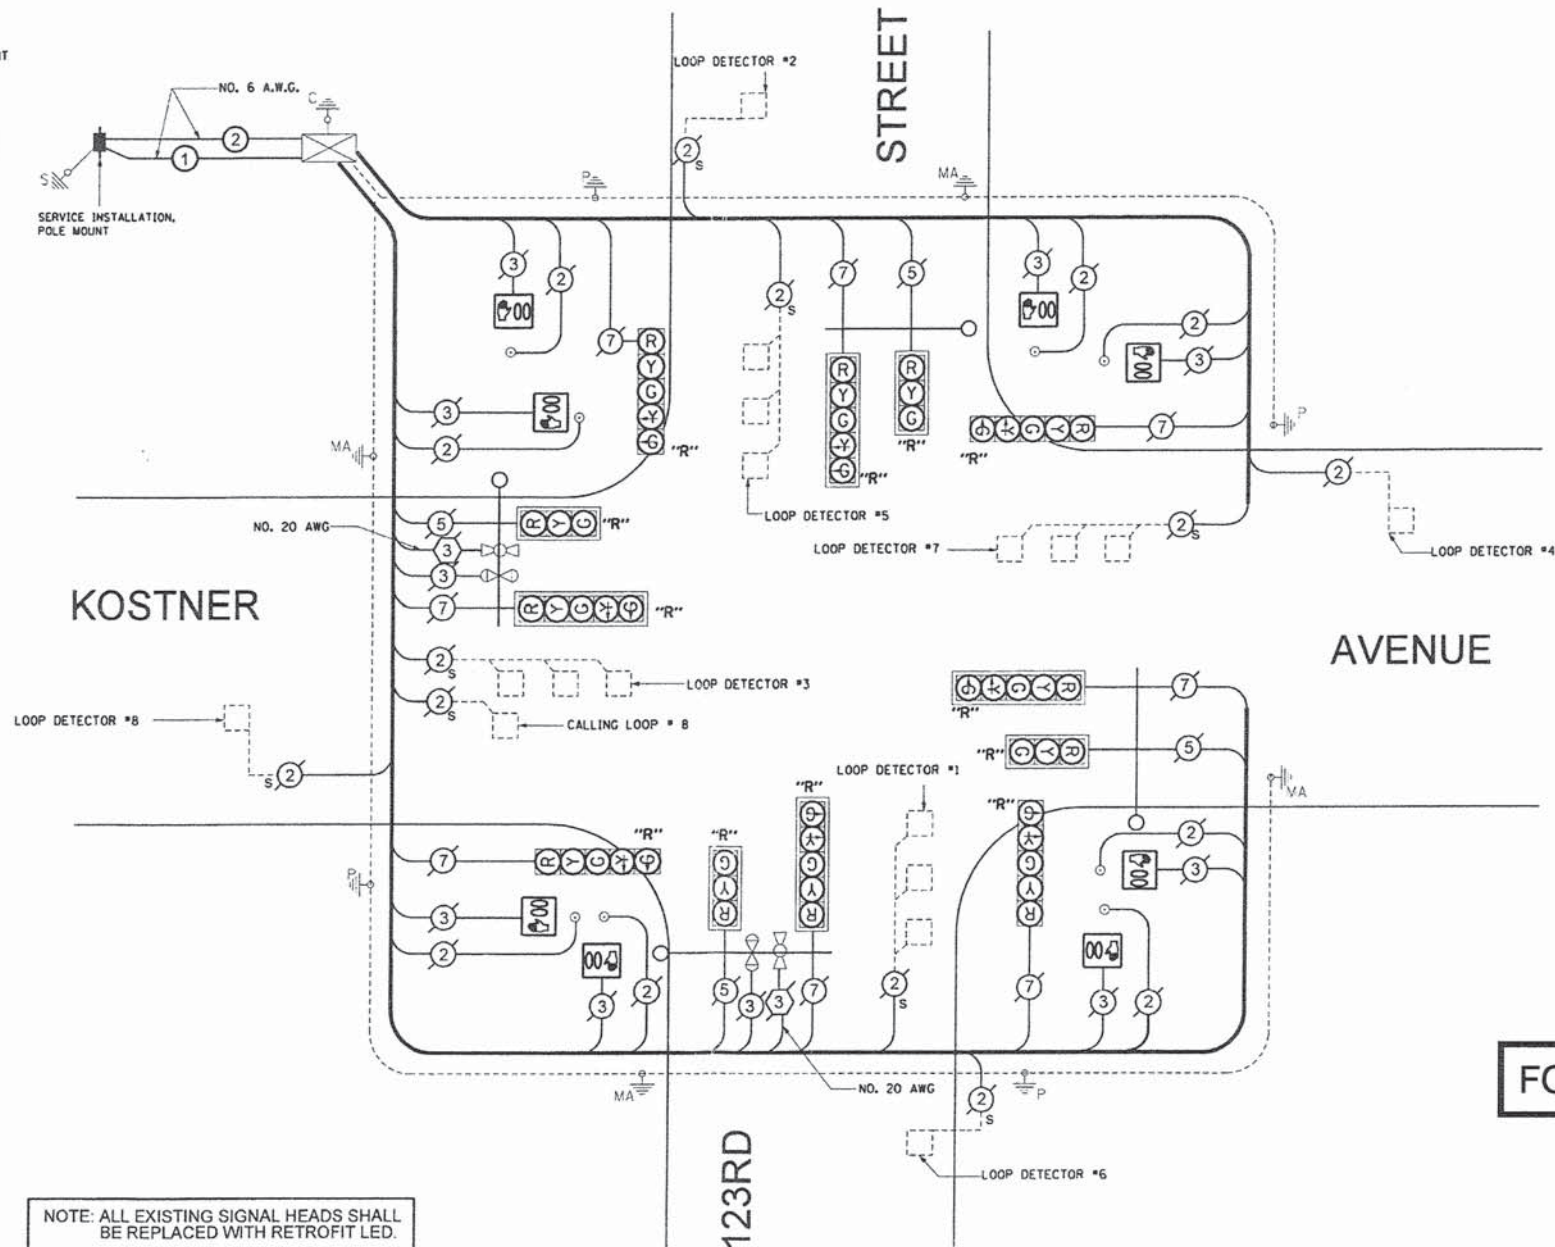

NOTE: ALL EXISTING SIGNAL HEADS SHALL BE REPLACED WITH RETROFIT LED.

FOR REFERENCE ONLY

CABLE PLAN

NOT TO SCALE

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

FAU 2403 (KOSTNER AVENUE)
 ROAD RESURFACING
 REFERENCE SHEETS

COUNTY OF COOK DEPARTMENT OF HIGHWAYS	
TRAFFIC SIGNAL INSTALLATION KOSTNER AND 123RD STREET (CABLE PLAN)	
COMPUTED: FL	APPROVED: _____ 20__
DRAWN: LMP/FL	
CHECKED: PLM/RLJ	

USER NAME =	DESIGNED -- SDK	REVISION --
PLOT SCALE =	CHECKED -- WPD	REVISION --
PLOT DATE = 1-18-16	DRAWN -- PS	REVISION --
	CHECKED -- AG	REVISION --

STATE	SHEET NO. 21 OF 21 SHEETS	STA. TO STA.	F.A.U. RTE. 2403	SECTION 14-00097-00-RS	COUNTY COOK	TOTAL SHEETS 21	SHEET NO. 21
SCALE:			CONTRACT NO. 61C51		FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-4003(426)		