



TYPICAL APPLICATION

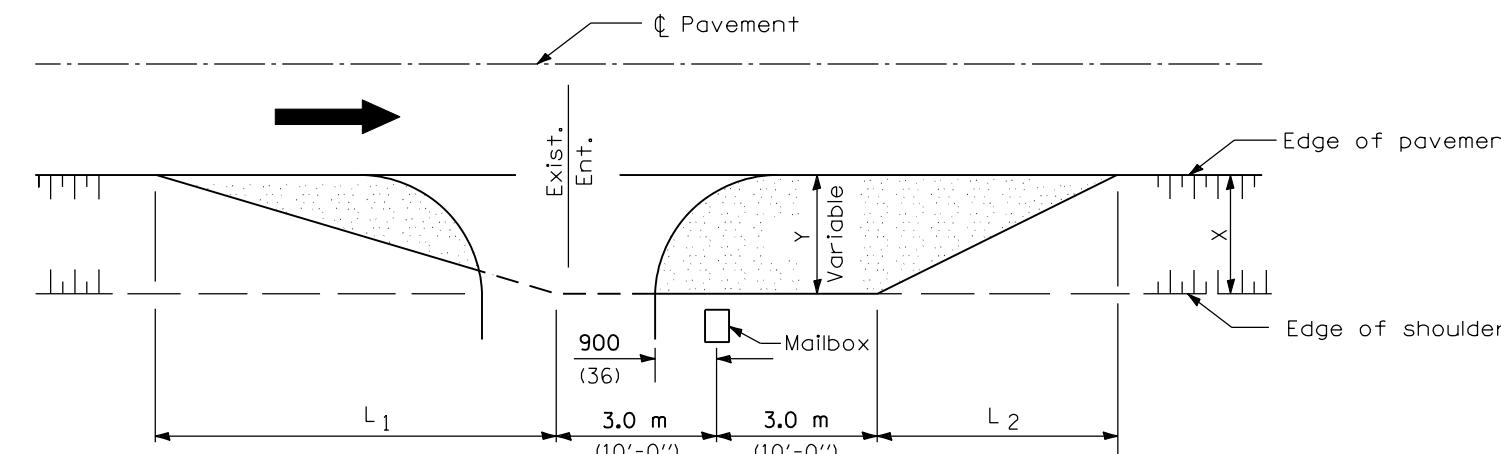

MAILBOX ON FAR SIDE OF ENTRANCE

DIMENSIONS - m (ft.)						
Width of Shoulder (X)	3.6 (12)	3.0 (10)	2.4 (8)	1.8 (6)	1.5 (5)	1.2 (4)
Width of Turnout (Y)	2.4 (8)	2.4 (8)	1.8 (6)	1.2 (4)	1.2 (4)	1.2 (4)
L1	9.0 (30)	9.0 (30)	6.9 (23)	4.5 (15)	4.5 (15)	4.5 (15)
L2	6.0 (20)	6.0 (20)	4.5 (15)	3.0 (10)	3.0 (10)	3.0 (10)

Note: Dimensions for Township and District Roads may vary from the above dimensions.

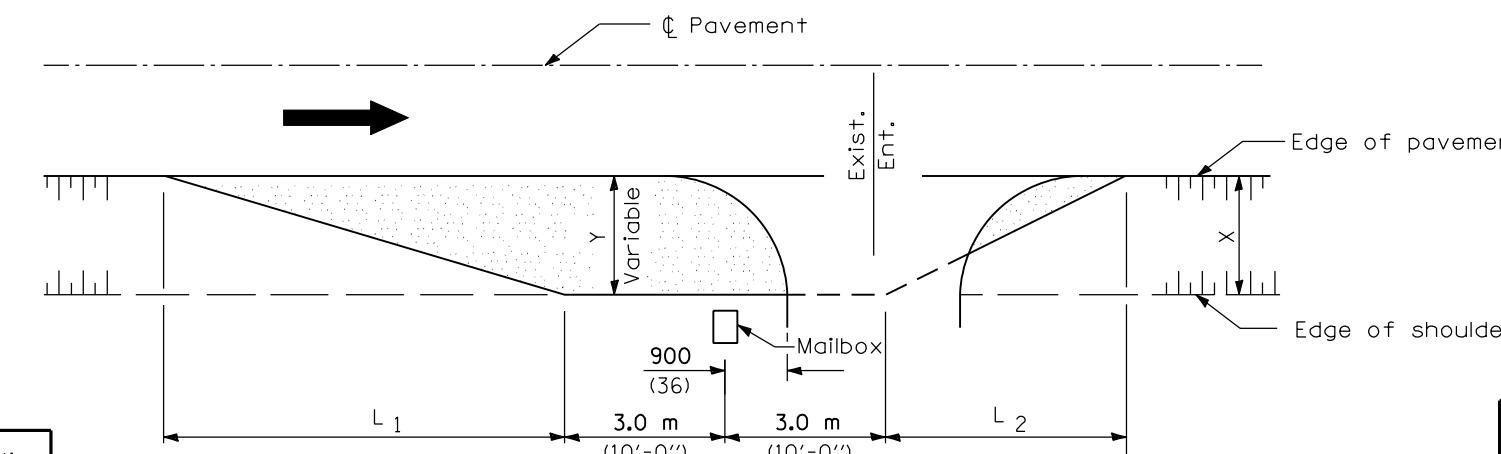

MAILBOX ON NEAR SIDE OF ENTRANCE

	Illinois Department of Transportation
APPROVED	January 1, 1999
<i>Dennis W. Murphy</i>	Engineer of Local Roads and Streets
APPROVED	January 1, 1999
<i>Bill Hurley</i>	Engineer of Design and Environment
ISSUED	1-1-97

DATE	REVISIONS
1-1-99	Add width of shoulder X.
1-1-97	New BLR Standard.

GENERAL NOTES

Mailboxes shall be mounted such that the face of the mailbox is 150 mm (6") to 300 mm (12") and the post a minimum of 600 mm (24") from the edge of the turnout surfacing.

All dimensions are in millimeters (inches) unless otherwise shown.

MAILBOX TURNOUT FOR LOCAL ROADS

STANDARD B.L.R. 24-1