


Qu = Approximate Unconfined Compressive Strength as Estimated by a Calibrated Penetrometer (tsf)
 N = Standard Penetration Test Blow Count (blows / 12 in.)
 %w = Moisture Content

SCALE:
 1" = 20' H
 1" = 2' V

PLAN	REVISION	BY	DATE
NO.	NO.		

PROFILE	REVISION	BY	DATE
NO.	NO.		

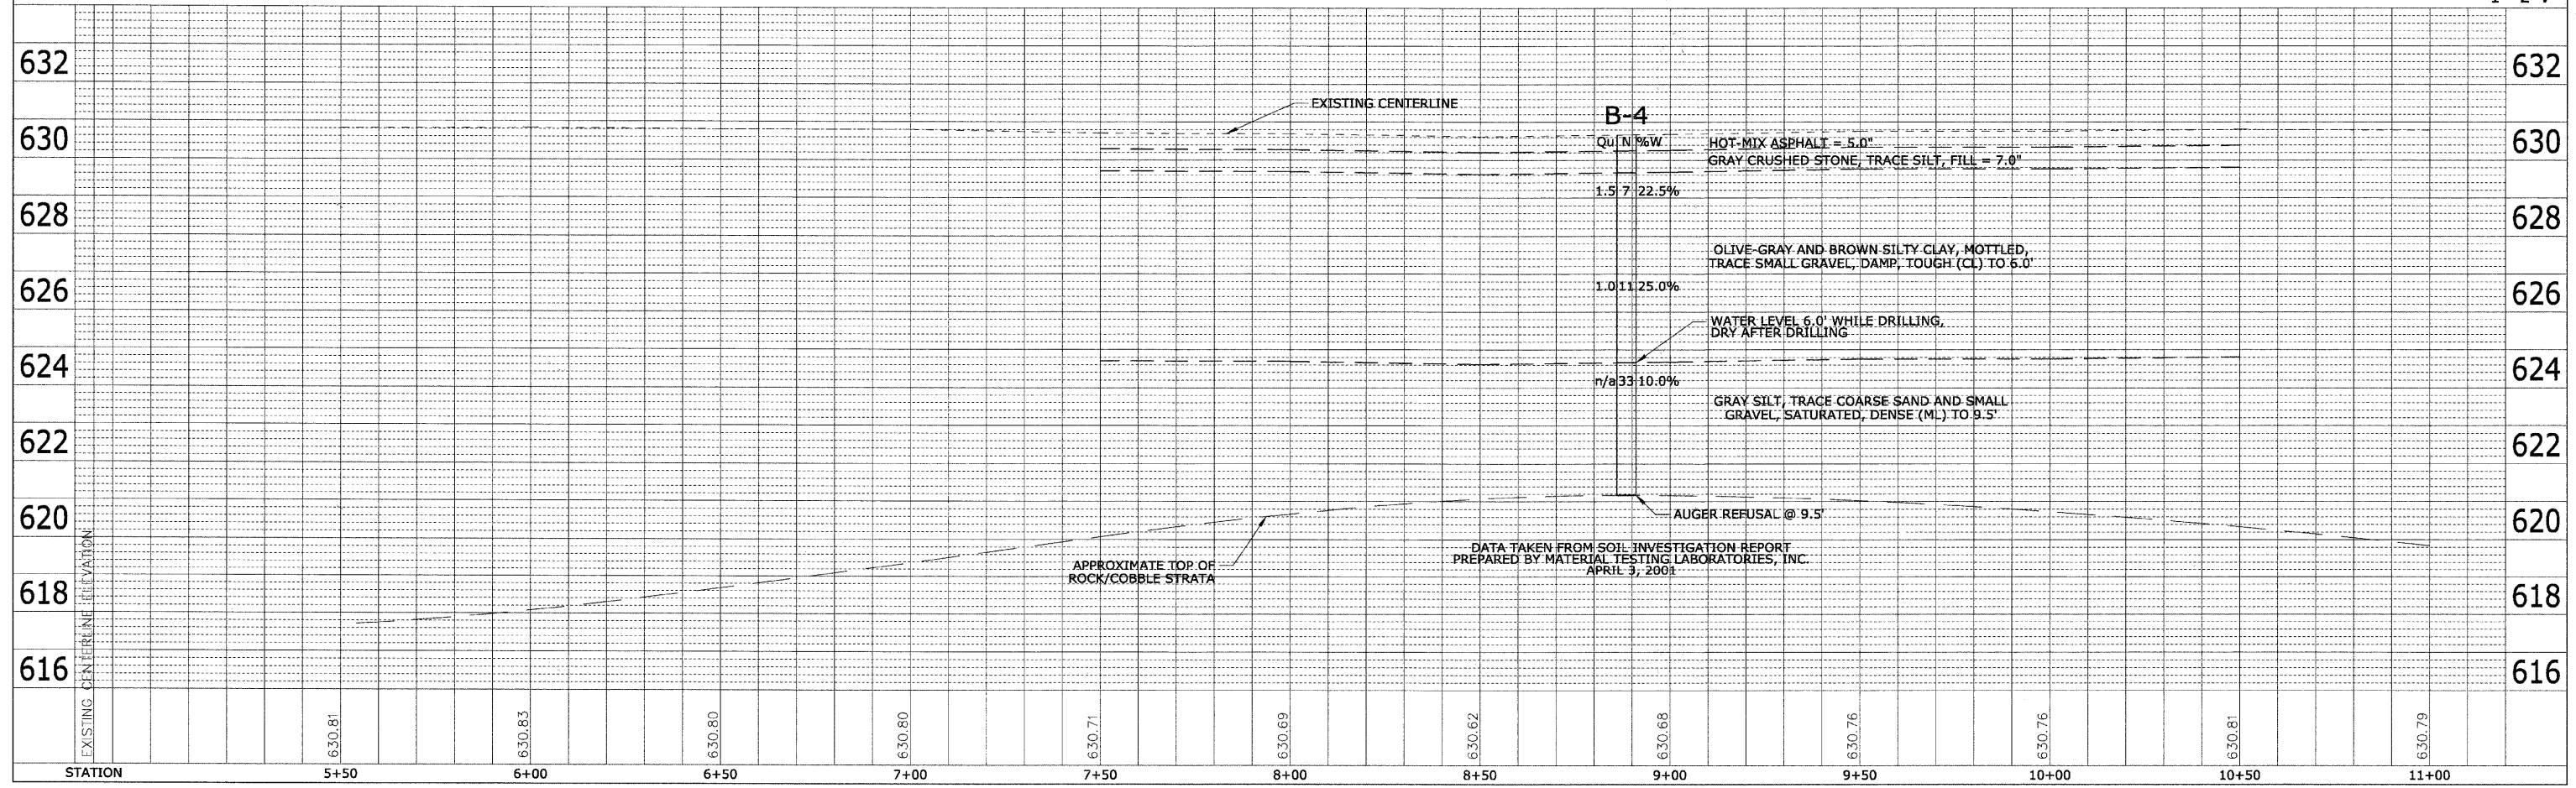

Qu	N	%W	DESCRIPTION
1.5	7	22.5%	HOT-MIX ASPHALT = 5.0" GRAY CRUSHED STONE, TRACE SILT, FILL = 7.0"
1.0	11	25.0%	OLIVE-GRAY AND BROWN SILTY CLAY, MOTTLED, TRACE SMALL GRAVEL, DAMP, TOUGH (CL) TO 5.0'
n/a	33	10.0%	GRAY SILT, TRACE COARSE SAND AND SMALL GRAVEL, SATURATED, DENSE (ML) TO 9.5'

DATA TAKEN FROM SOIL INVESTIGATION REPORT
 PREPARED BY MATERIAL TESTING LABORATORIES, INC.
 APRIL 3, 2001