


### Loop Splicing Requirements

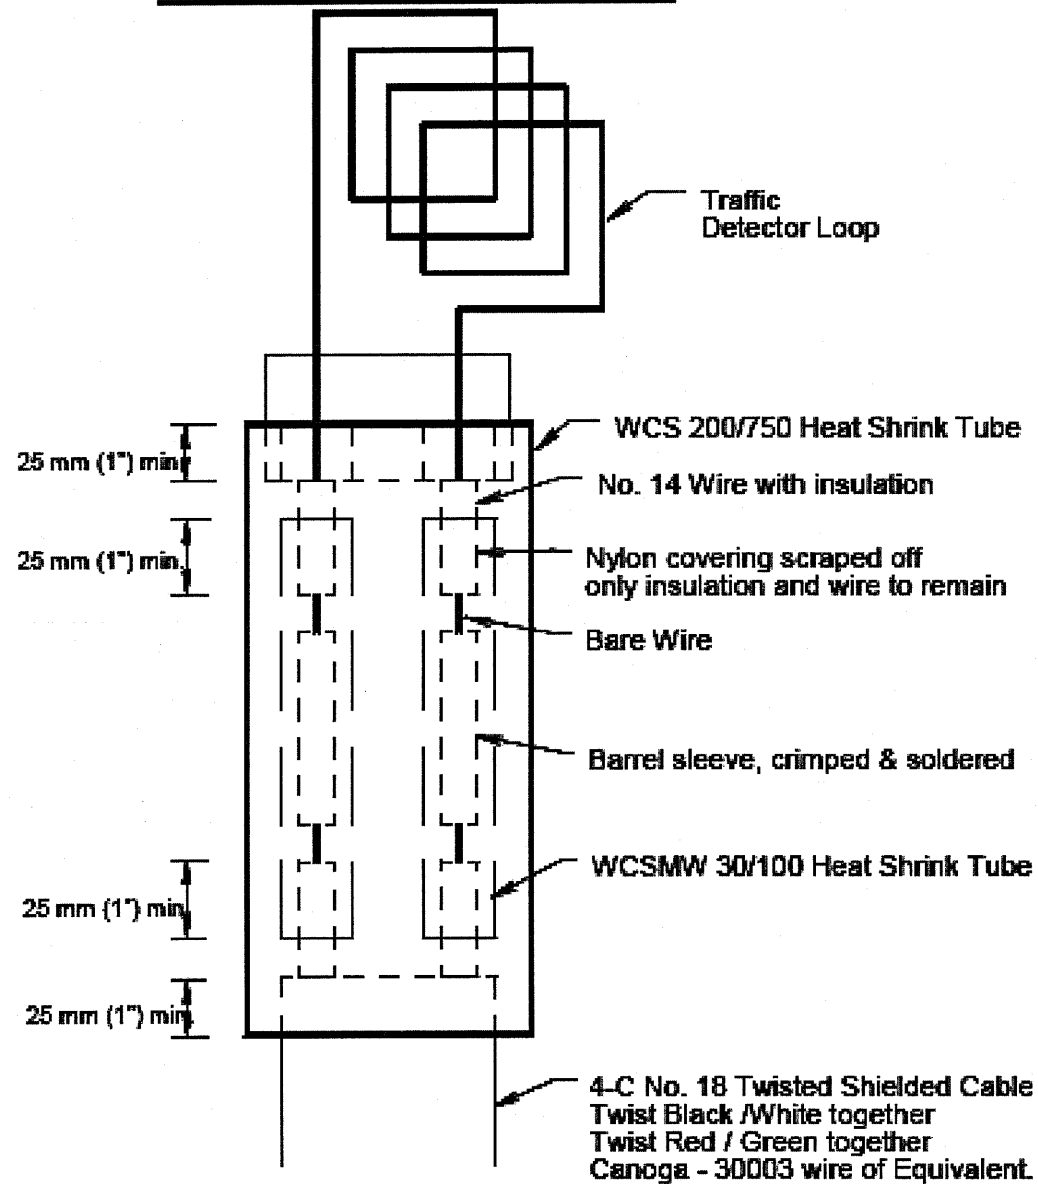

Minimum 25 mm (1") Heat Shrink Tube overlap on wire.  
PVC & Shielded cable to form water tight seal.

Note: Not to Scale

### POSSIBLE SOURCES for SPECIFIED ITEMS

Material	Possible Source	Contact Person	Telephone Number	Location
Loop Detector Wire encased in Orange Detecta-Duct Tubing	Kris-Tech Wire Company (manufacturer)	Sales Person	(315) 338-5288	Rome, N.Y.
Conoga 2-pair shielded wire suitable for direct burial	3M Traffic Products Division (manufacturer)	Sales Person	(612) 733-1110	Minneapolis, MI
Global PU280 Resin	PAT of America (distributor)	Scott Sherwood	(815) 675-1430	Spring Grove, IL
ECM P5G Resin	Electronic Control Measurements, Inc (ECM) (manufacturer)	Ronald White	(512) 272-4348	Manor, TX
Class-II Bare Linguine (BL) Sensors	Measurement Specialties, Inc (mfg.)	Don Halverson	(610) 650-1580	Valley Forge, PA
	PAT of America (distributor)	Scott S/ Mark F	(815) 675-1430	Spring Grove, IL
	Trigg Ind. (distributor)	Harry Trigg Jr.	(323) 845-9390	Los Angeles, CA

Note: If manufacturers are listed rather than distributors, it may be necessary to contact the manufacturer for the nearest distributor or vendor.

