

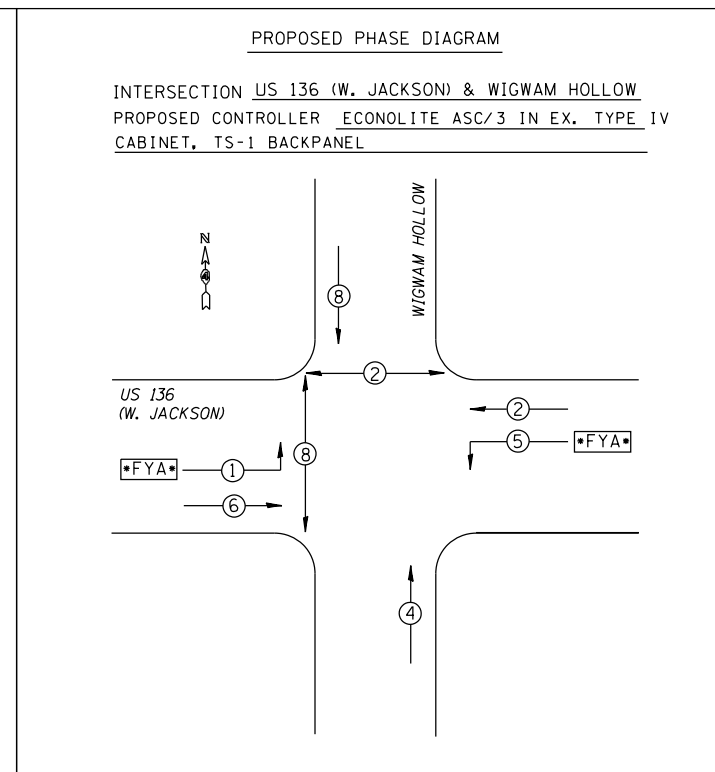


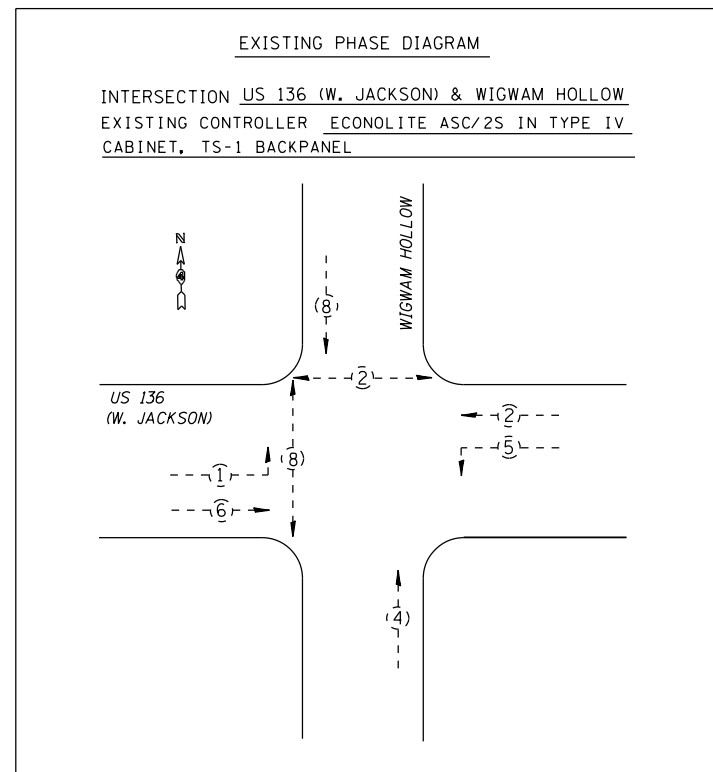

TRAFFIC SIGNAL HEAD SCHEDULE - US 136 (W. JACKSON) & WIGWAM HOLLOW		
QTY.	TYPE	LOCATION
8.0 EACH	SH LED RETROFIT	2,3,4,5,8,9,10,12
9.0 EACH	MOD EX TS BACKPLATE	1,2,3,4,5,7,8,9,10
4.0 EACH	REBUILD EX SIG HD LED	1,6,7,11 (ALL EX. HEADS ARE 5-SECTION)
2.0 EACH	PED SH LED 1F BM CDT	P1,P4
1.0 EACH	PED SH LED 2F BM CDT	(P2,P3)

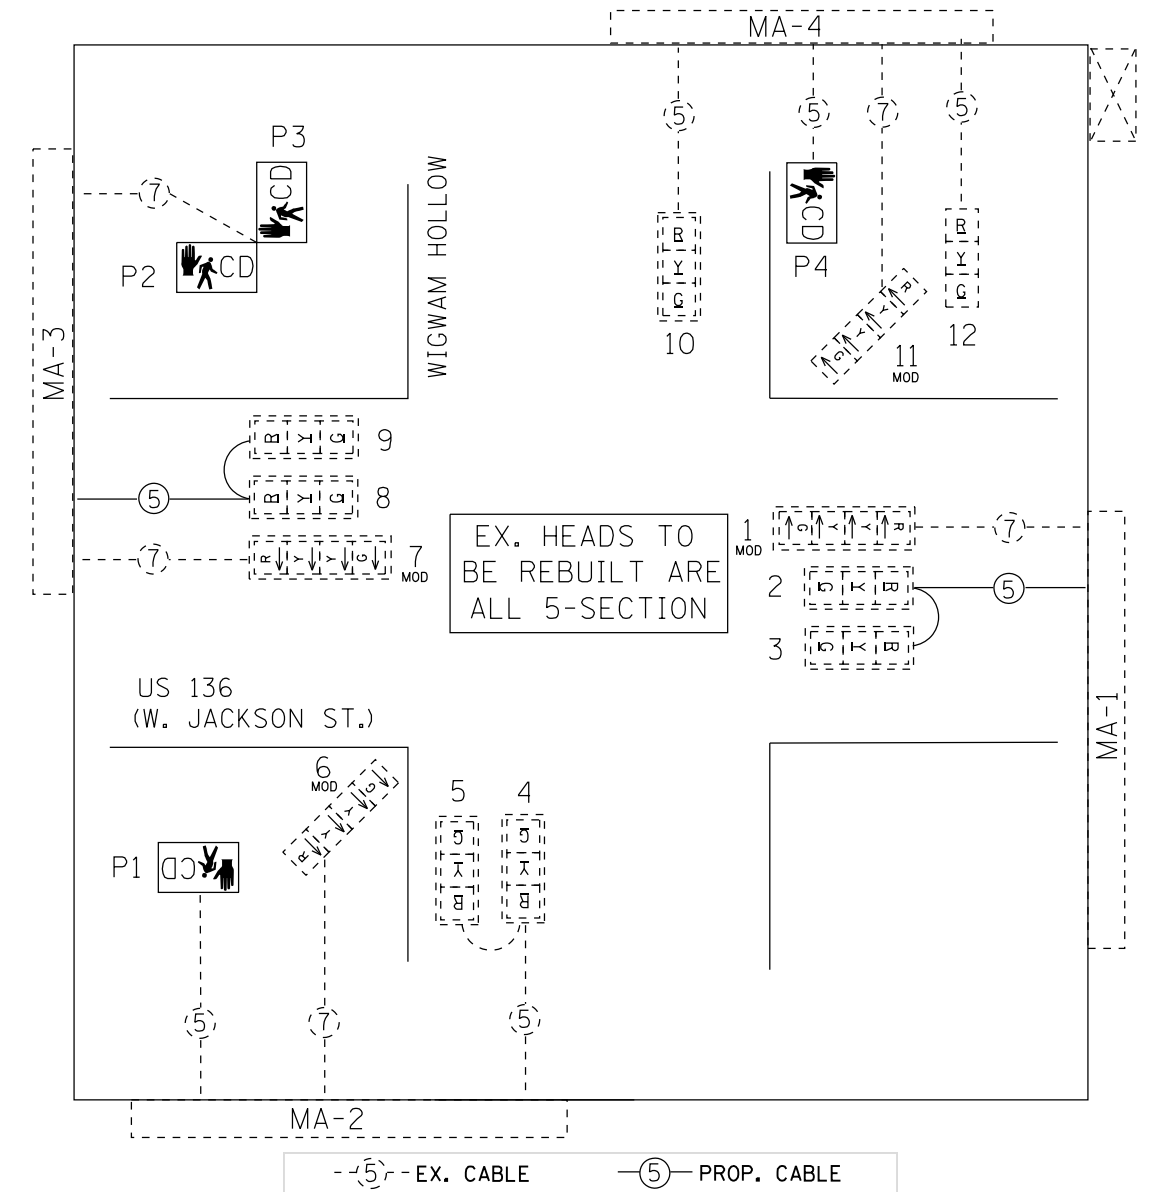

BILL OF MATERIALS - US 136 (W. JACKSON) & WIGWAM HOLLOW		
ITEM DESCRIPTION	UNIT	TOTAL QTY.
SIGN PANEL - TYPE 1	SQ FT	10.0
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C	FOOT	405.0
PEDESTRIAN SIGNAL HEAD, LED, 1-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER	EACH	2.0
PEDESTRIAN SIGNAL HEAD, LED, 2-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER	EACH	1.0
MODIFY EXISTING TRAFFIC SIGNAL BACKPLATE	EACH	9.0
REBUILD EXISTING SIGNAL HEAD, LED	EACH	4.0
MODIFY EXISTING CONTROLLER CABINET	EACH	1.0
SIGNAL HEAD, LED, RETROFIT	EACH	8.0

FILE NAME = C:\Users\aubreygs\Desktop\68B61\68B61	USER NAME = aubreygs	DESIGNED -	REVISED -
Macomb FYA Project (Final 1-31-14).dgn		DRAWN -	REVISED -
PLOT SCALE = 38.0588' / in.		CHECKED -	REVISED -
PLOT DATE = 1/31/2014		DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**PROPOSED TRAFFIC SIGNALS
US 136 (W. JACKSON) & WIGWAM HOLLOW - MACOMB**

SCALE: _____ STA. _____ TO STA. _____

F.A.P. RTE. 310 315	SECTION D4 FLASHING YELLOW ARROWS 2013	COUNTY MCDONOUGH	TOTAL SHEETS 24	SHEET NO. 17
CONTRACT NO. 68B61			ILLINOIS FED. AID PROJECT	