


ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	THIS SHEET
LOCAL STREET	*	TAZEWELL	23	16

FED. RD. DIST. NO. 7 ILLINOIS PROJECT
 12-00112-00-SW
 CONTRACT NO. 89623

**COMBINATION CONCRETE CURB AND GUTTER
 CITY STANDARD TYPE B-6.12**

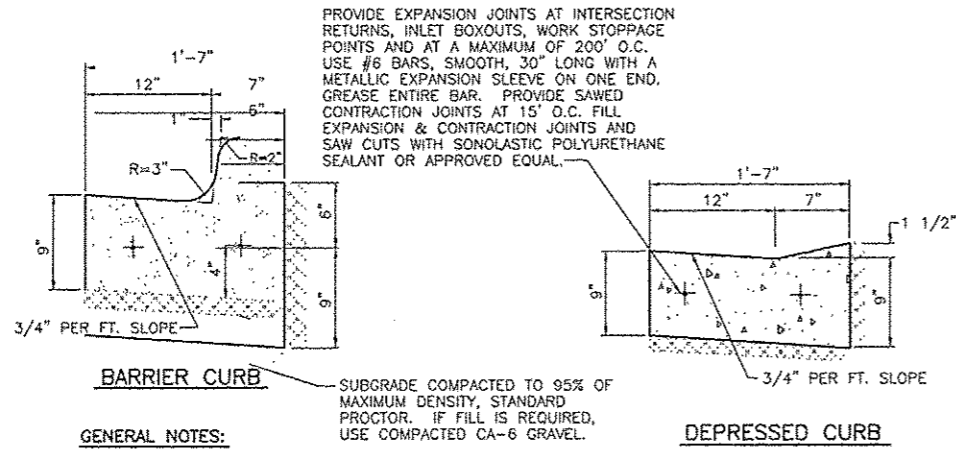


PROVIDE EXPANSION JOINTS AT INTERSECTION RETURNS, INLET BOXOUTS, WORK STOPPAGE POINTS AND AT A MAXIMUM OF 200' O.C. USE #6 BARS, SMOOTH, 30" LONG WITH A METALLIC EXPANSION SLEEVE ON ONE END. GREASE ENTIRE BAR. PROVIDE SAWED CONTRACTION JOINTS AT 15' O.C. FILL EXPANSION & CONTRACTION JOINTS AND SAW CUTS WITH SONOLASTIC POLYURETHANE SEALANT OR APPROVED EQUAL.

GENERAL NOTES:

- CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE STATE OF ILLINOIS "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" CURRENT EDITION AND SUPPLEMENTAL SPECIFICATIONS, UNLESS OTHERWISE DIRECTED BY THE CITY ENGINEER.
- REFER TO SECTION 420 OF THE STANDARD SPECIFICATIONS.

City Of Washington	CONSTRUCTION STANDARD	DATE:	STANDARD NO.
		FEB. 2008	012


**TYPICAL STREET REPAIR FOR UNDERGROUND UTILITY INSTALLATION
 STA. 10+55.24 TO STA. 11+17.76**

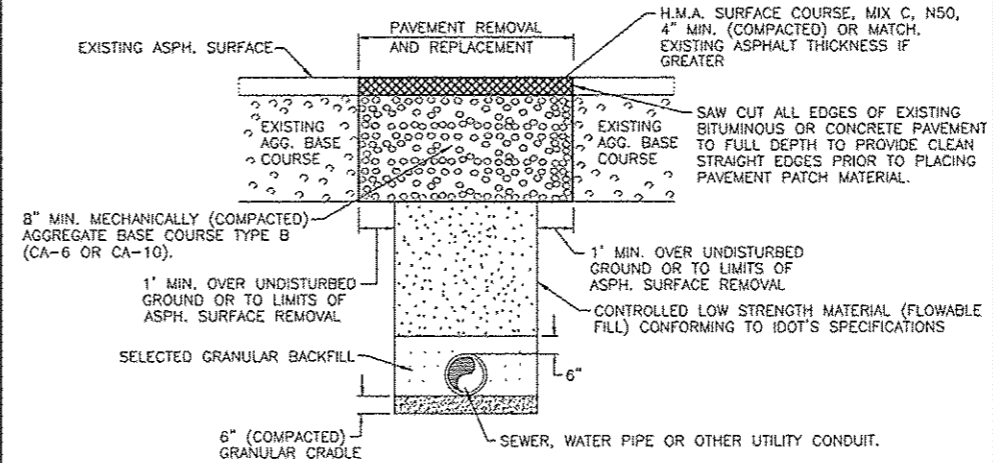

GENERAL NOTES:

- FOR CONCRETE OR BRICK PAVEMENTS, THE SURFACE SHALL BE REPLACED TO MATCH THE EXISTING PAVEMENT.
- PRIOR TO PLACING THE H.M.A., CONCRETE OR BRICK PAVEMENT, THE BASE COURSE SHALL BE INSPECTED BY THE CITY ENGINEER. THE FLOWABLE FILL AND BASE COURSE SHALL BE ALLOWED TO SET IN PLACE A MINIMUM OF 24 HOURS PRIOR TO PLACING THE PAVEMENT SURFACE.
- IF THE BITUMINOUS CONCRETE MATERIAL IS NOT AVAILABLE DUE TO SEASONAL CLOSING OF THE BATCH PLANTS, THEN A TEMPORARY SURFACE CONSISTING OF COLD MIX ASPHALT SHALL BE APPLIED UNTIL THE "HOT MIX" ASPHALT MATERIAL IS AVAILABLE.

City Of Washington	CONSTRUCTION STANDARD	DATE:	STANDARD NO.
		FEB. 2008	025

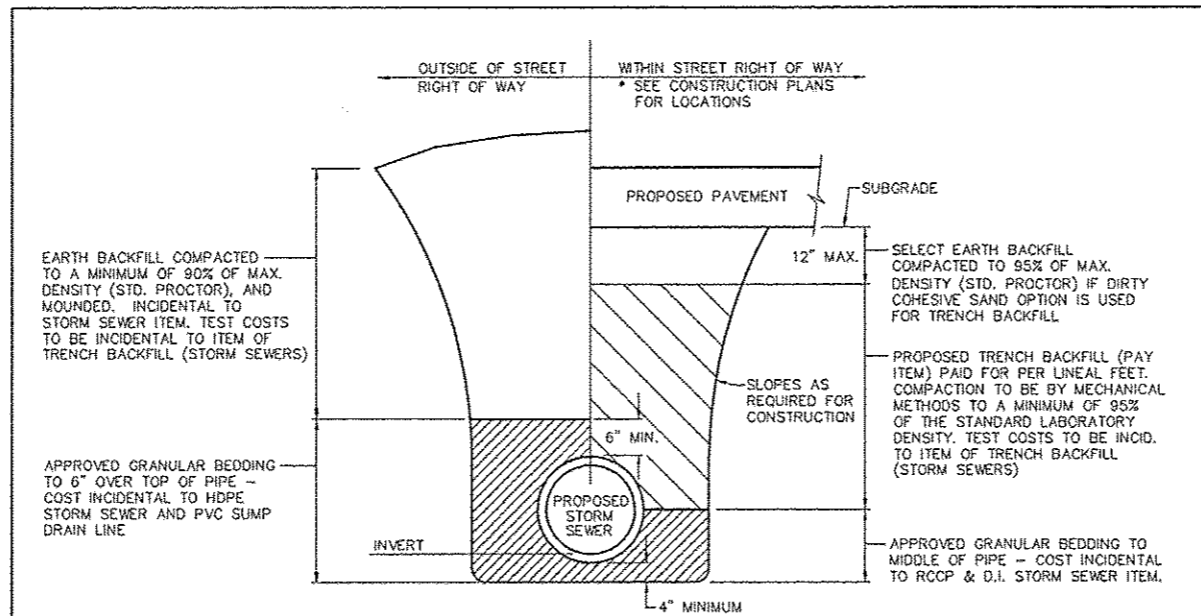

CA-6 OR DIRTY COHESIVE SAND IS THE WASHINGTON APPROVED GRANULAR BACKFILL MATERIAL TO BE USED.

CA-7 OR CA-11 IS THE WASHINGTON APPROVED GRANULAR PIPE BEDDING MATERIAL; HOWEVER, WHITE FRACTURED CA-11 SHALL BE USED TO BED HDPE STORM SEWER PIPE.

STORM SEWER & SUMP DRAIN LINE TRENCH DETAILS

City Of Washington	CONSTRUCTION STANDARD	DATE:	STANDARD NO.
		FEB. 2008	023

MISCELLANEOUS CONSTRUCTION DETAILS BEVERLY MANOR SCHOOL SIDEWALK CITY OF WASHINGTON CONSTRUCTION STDS	AUSTIN ENGINEERING CO., INC. CIVIL ENGINEERS
FOR: CITY OF WASHINGTON	PROJECT: 12-00112-00-SW
DATE: 12/19/13	SHEET NO. 16 OF 23