

## STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths							
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7"	2'-11''	
5	1'-9''	2'-5''	2'-7"	2'-11''	3'-3''	3'-8''	
6	2'-1''	2'-11''	3'-1''	3'-6''	3'-10''	4'-5''	
7	2'-9''	3'-10''	4'-2''	4'-8''	5'-2''	5′-10′′	
8	3'-8''	5'-1''	5′-5″	6'-2''	6′-9″	7′-8″	
9	4'-7''	6′-5″	6'-10''	7′-9″	8'-7''	9′-8″	

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C


Table 4:Epoxy bar.Top bar lap.0.8 Class CTable 5:Epoxy bar.Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length +  $l_2''$  + thread length

\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

Location	Bar size	No. assemblies required	Table for minimum lap length		
Abutment	Abutment #5				
Deck	#5	40			

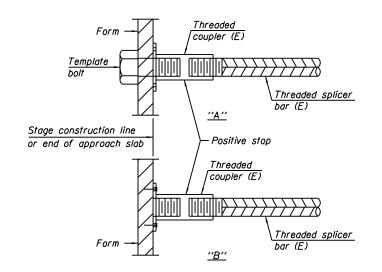



## INSTALLATION AND SETTING METHODS

"A":


"B" : Set bar splicer assembly by means of a template bolt. Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E) : Indicates epoxy coating.

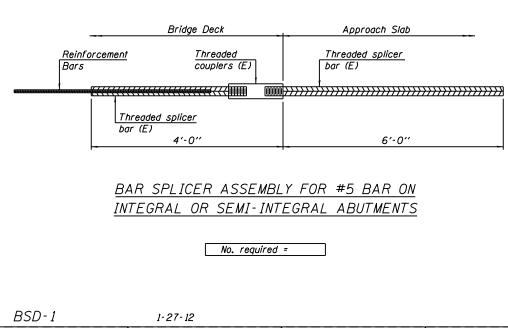

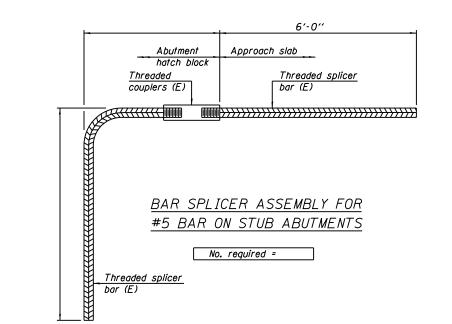

B0B 1									
FILE NAME =	USER NAME = Gorengautab	DESIGNED MV T	REVISED _			ILL 12 (ELM STREET) OVER FOX RIVER	F.API RTE.	SECTION	COUNTY TOTAL SHEET
ci\pw_work\pwidot\gorengaute	b\d0101671\056-0049,dgn		REVISED _	STATE OF ILLINOIS	BAR SPLICER ASSEMBLY 333 14x-1-3(13)		MCHENRY 29 13		
	PLOT SCALE = 100.0000 '/ In.	CHECKED	REVISED _	DEPARTMENT OF TRANSPORTATION			CONTRACT NO. 60X22		
	PLOT DATE = 2/19/2014	DATE	REVISED _		SCALE:	SHEET NO. 10 OF SHEETS STA. TO STA.		ILLINOIS FED. A	ID PROJECT

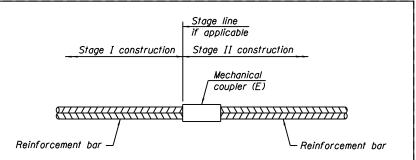

## STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See approved list of bar splicer assemblies and mechanical splicers for alternatives.