

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) I'' x I' x I'' x I'' steel I' to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate € of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1" x 7" x "W" steel P to the concrete slab or concrete wearing surface with $2^{-\frac{5}{8}}$ " ϕ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM


EXISTING SLAB

*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.


EXISTING DECK BEAM

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

Extended #5 bars

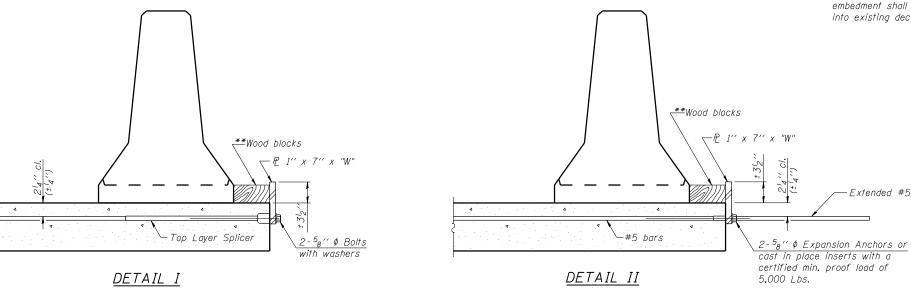

NEW SLAB



STEEL RETAINER P 1" x 7" x "W"

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

* Required only with Detail II

R-27

7-1-10

ESCA CONSULTANTS, INC.	

USER NAME = has		DESIGNED	-	ELH	01/14	REVISED	-
ESCA PROJECT NO. 1070.09		CHECKED	-	RDP	01/14	REVISED	-
		DRAWN	-	HAS	01/14	REVISED	-
PLOT DATE = 1/28/2014	11:09:38 AM	CHECKED	-	ELH	01/14	REVISED	-

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NOS. 026-0106 & 026-0107	
SHEET NO. 5A OF 113 SHEETS	

λ. Ι. Έ.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
o.	(26-3B-1, 3B-1(3))BR	FAYETTE	277	85A			
CONTRACT NO. 74175							
ILLINOIS FED. AID PROJECT							