

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	(5,6,7)PP-1	PERRY	8	1
ILLINOIS CONTRACT NO. 78B25				

FOR INDEX OF SHEETS, SEE SHEET NO. 3

TRAFFIC DATA - 2023 ADT
US 51 - 3000 WITH 8% TRUCKS

**PROPOSED
HIGHWAY PLANS**

**FAP ROUTE 322 (US 51)
SECTION (5,6,7)PP-1
PATCHING
PERRY COUNTY**

C-99-066-25

**TOWNSHIPS
PERRY CO. UNIT
ROAD DISTRICT**

**PROJECT ENDS
STA. 585+19**

**EQ. STA. 576+88.45 (BK) =
STA. 584+69.0 (AH)**

**EQ. STA. 544+05.37 (BK) =
STA. 544+05.87 (AH)**

**EQ. STA. 464+36.79 (BK) =
STA. 465+74.10 (AH)**


**EQ. STA. 367+03.70 (BK) =
STA. 380+92.90 (AH)**

**EQ. STA. 327+61.91 (BK) =
STA. 327+60.07 (AH)**

DESIGN DESIGNATION : N/A

COORDINATE SYSTEM :N/A

POSTED SPEED : 20-55 MPH

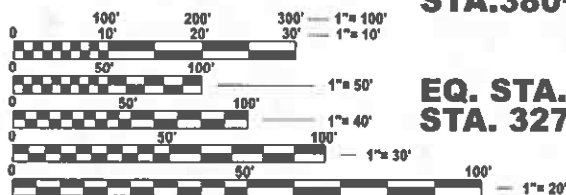

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

**PROJECT ENGINEER: NATHAN TAYLOR
PROJECT MANAGER: ZACH RODELY**

**PROJECT BEGINS
STA. 220+20**

GROSS LENGTH = 34193 FT. = 6.48 MILE
NET LENGTH = 34193 FT. = 6.48 MILE

CONTRACT NO. 78B25



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Jan 31 20 25
Lora S. Renshaw REGIONAL ENGINEER

March 21 20 25
[Signature] ENGINEER OF DESIGN AND ENVIRONMENT

March 21 20 25
[Signature] 5
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

MODEL: Signature Sheet (Sheet)
FILE NAME: C:\w...not...illinois.gov\zachary.rodey\1068995\0378825-SHA-Cover_Sig.dgn

USER NAME	• zachary.rodey	DESIGNED	-	REVISED	-
		DRAWN	-	REVISED	-
		CHECKED	-	REVISED	-
PLOT DATE	• 1/9/2025	DATE	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNATURE SHEET

SCALE SHEET 2 OF 8 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	(6.6.7)PP-1	PERRY	8	2
CONTRACT NO. 78B25				
ILLINOIS FED. AID PROJECT				

Prepared By: Susan Poe
DISTRICT STUDIES & PLANS ENGINEER

Examined By: _____
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Am Th
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: Z CC
DISTRICT OPERATIONS ENGINEER

Examined By: _____
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: Ben Reilly
DISTRICT CONSTRUCTION ENGINEER

Examined By: Ann Harg
DISTRICT MATERIALS ENGINEER

GENERAL NOTES

REVISE STANDARD SPECIFICATIONS ARTICLE 107.12, PARAGRAPH 5, LAST SENTENCE TO READ: 'ALL OTHER RAILROAD FLAGGER COSTS WILL BE INCURRED BY THE DEPARTMENT ACCORDING TO ARTICLE 109.05.'

COMMITMENTS: NONE

INDEX OF SHEETS

SHEET NO	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET
3	GENERAL NOTES, INDEX OF SHEETS, HIGHWAY STANDARDS, LIST OF COMMITMENTS
4	SUMMARY OF QUANTITIES
5-8	SCHEDULES

HIGHWAY STANDARDS

- 000001-08 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 001006 DECIMAL OF AN INCH AND OF A FOOT
- 420001-10 PAVEMENT JOINTS
- 442201-03 CLASS C & D PATCHES
- 701011-04 OFF-ROAD MOVING OPERATIONS, 2L, 2W, DAY ONLY
- 701201-05 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS 45 MPH OR MORE
- 701301-04 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701336-07 LANE CLOSURE, 2L, 2W, WORK AREAS IN SERIES, FOR SPEEDS 45MPH OR MORE
- 701501-06 URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
- 701901-10 TRAFFIC CONTROL DEVICES

MODEL: Index Gen notes [Sheet]
FILE NAME: c:\pw\work\pww\illinois.gov\zackary.rodaly\065955\0978B25-SH1B-Index_GenNotes.dgn

	USER NAME = za thary. dely	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATI ON	GENERAL NOTES, I NDEX OF SHEETS HIGHWAY STANDARDS, AND LIST OF COMMI TMENTS	F.A.P RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN -	REVISED -			322	(5,6,7)PP-1	PERRY	8	3	
		CHECKED -	REVISED -			CONTRACT NO. 78B25					
	PLOT DATE = 1/15/2025	DATE -	REVISED -			SCALE:	SHEET 3	OF 8	SHEETS	STA.	TO STA.
								ILLINOIS FED. AID PROJECT			

SUMMARY OF QUANTITIES

CODE NUMBER	ITEM DESCRIPTION	UNIT	COUNTY:	PERRY CO
			ROUTE:	FAP 322
			FUNDING:	100% STATE
			LOCATION:	RURAL
TOTAL QUANTITY				ROADWAY
				0005
44201373	CLASS C PATCHES, TYPE I, 12 INCH	SQ YD	16	16
44201377	CLASS C PATCHES, TYPE II, 12 INCH	SQ YD	1379	1379
44201381	CLASS C PATCHES, TYPE III, 12 INCH	SQ YD	365	365
44201383	CLASS C PATCHES, TYPE IV, 12 INCH	SQ YD	303	303
44201423	CLASS C PATCHES, TYPE I, 16 INCH	SQ YD	16	16
44201427	CLASS C PATCHES, TYPE II, 16 INCH	SQ YD	54	54
44201431	CLASS C PATCHES, TYPE III, 16 INCH	SQ YD	20	20
44201433	CLASS C PATCHES, TYPE IV, 16 INCH	SQ YD	54	54
67100100	MOBILIZATION	L SUM	1	1
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	1
70100600	TRAFFIC CONTROL AND PROTECTION, STANDARD 701336	L SUM	1	1
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1	1
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	28	28
Z0048665	RAILROAD PROTECTIVE LIABILITY INSURANCE	L SUM	1	1

MODEL: SQO [Sheet]
FILE NAME: c:\p\work\pwrtd\illinois.gov_zachary.rodely\@illinois.gov\d1065955\0978B25-ShIC-Sco.dgn

PATCHING SCHEDULE NBL

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 16 INCH	CLASS C PATCHES (TYPE II) 16 INCH	CLASS C PATCHES (TYPE III) 16 INCH	CLASS C PATCHES (TYPE IV) 16 INCH	LOCATION NOTES
	(INFO ONLY)								
1	4	12	5.3	0		6			N EXIST. BUTT JT
2	4	12	5.3	0.1		6			
3	4	12	5.3	1.2		6			
4	20	12	26.7	1.4				27	
5	4	12	5.3	1.4		6			
6	15	12	20.0	1.5			20		
7	6	6	4.0	1.5	4				
8	6	6	4.0	1.5	4				
SUB-TOTAL NBL					8	24	20	27	

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
9	4	12	5.3	1.6		6			
10	6	12	8.0	1.9		8			
11	4	12	5.3	1.9		6			
12	5	12	6.7	2		7			
13	10	12	13.3	2.2		14			
14	4	12	5.3	2.2		6			
15	4	12	5.3	2.2		6			
16	10	12	13.3	2.3		14			
17	15	12	20.0	2.6			20		
18	4	12	5.3	2.7		6			
19	4	12	5.3	2.7		6			
20	4	12	5.3	2.7		6			
21	4	12	5.3	2.7		6			RAILROAD X-ING
22	12	12	16.0	2.9			16		
23	15	12	20.0	3			20		CITY LIMIT
24	10	12	13.3	3.1		14			
25	10	12	13.3	3.1		14			
26	10	12	13.3	3.1		14			
27	4	12	5.3			6			CONDIT ST
28	20	12	26.7					27	
SUB-TOTAL NBL 1						139	56	27	

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
29	20	12	26.7					27	BROADWAY ST.
30	10	12	13.3			14			
31	10	12	13.3			14			3RD SOUTH ST.
32	10	12	13.3			14			
33	10	12	13.3			14			
34	10	12	13.3			14			2ND SOUTH ST.
35	4	12	5.3			6			1ST SOUTH ST.
36	4	12	5.3			6			
37	10	12	13.3			14			1ST NORTH ST.
38	5	12	6.7			7			2ND NORTH ST.
39	4	12	5.3			6			
40	4	12	5.3			6			
41	10	12	13.3			14			
42	4	12	5.3			6			
43	10	12	13.3			14			
44	4	12	5.3			6			
45	8	12	10.7			11			
46	8	12	10.7			11			
47	4	12	5.3			6			
48	4	12	5.3			6			
49	4	12	5.3			6			ADAMS/WALNUT ST.
50	4	12	5.3	4.1		6			
51	4	12	5.3	4.1		6			
52	5	12	6.7	4.1		7			
53	8	12	10.7	4.2		11			
54	8	12	10.7	4.2		11			
55	4	12	5.3	4.3		6			
56	5	12	6.7	4.3		7			
57	4	12	5.3	4.4		6			
58	8	12	10.7	4.4		11			
59	10	12	13.3	4.4		14			
60	15	12	20.0	4.5			20		
61	15	12	20.0	4.6			20		
62	10	12	13.3	4.7		14			
63	10	12	13.3	4.7		14			
64	10	12	13.3	4.8		14			
65	30	12	40.0	4.8				40	
66	5	12	6.7	4.9		7			
67	20	12	26.7	4.9				27	
68	10	12	13.3	4.9		14			
SUB-TOTAL NBL 2						280	40	27	

MODEL: NB Schedule (Sheet)
FILE NAME: c:\pw_work\pwork\illinois.gov_zachary.rodely\065955\0978B25-ShIE-Schedule.dgn

USER NAME = zachary.rodely	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/15/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NB PATCHING SCHEDULES

SCALE: SHEET 5 OF 8 SHEETS STA. TO STA.

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	(5,6,7)PP-1	PERRY	8	5
CONTRACT NO. 78B25				
ILLINOIS FED. AID PROJECT				

PATCHING SCHEDULE NBL (CONT.)

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
68	10	12	13.3	4.9		14			
69	4	12	5.3	4.9		6			
70	15	12	20.0	5.2			20		
71	10	12	13.3	5.2		14			
72	6	12	8.0	5.2		8			
73	8	12	10.7	5.2		11			
74	15	12	20.0	5.3			20		
75	5	12	6.7	5.3		7			
76	10	12	13.3	5.4		14			
77	4	12	5.3	5.4		6			
78	4	12	5.3	5.4		6			
79	4	12	5.3	5.5		6			
80	4	12	5.3	5.5		6			
81	4	12	5.3	5.6		6			
82	4	12	5.3	5.6		6			
83	4	12	5.3	5.7		6			
84	4	12	5.3	5.8		6			
85	4	12	5.3	5.8		6			
86	4	12	5.3	5.8		6			
SUB-TOTAL NBL 3						134	40		

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
87	4	12	5.3	5.8		6			
88	4	12	5.3	5.8		6			
89	4	12	5.3	5.9		6			
90	4	12	5.3	5.9		6			
91	6	12	8.0	5.9		8			
92	4	12	5.3	5.9		6			
93	4	12	5.3	6		6			
94	4	12	5.3	6		6			
95	4	12	5.3	6.1		6			
96	4	12	5.3	6.1		6			
97	4	12	5.3	6.1		6			
98	4	12	5.3	6.2		6			
99	4	12	5.3	6.2		6			
100	4	12	5.3	6.3		6			
101	4	12	5.3	6.3		6			
102	4	12	5.3	6.3		6			
103	4	12	5.3	6.3		6			
104	4	12	5.3	6.3		6			
105	35	12	46.7	6.3				47	RAVEN RD.
SUB-TOTAL NBL 4						110		47	

MODEL: SR Schedule [Sheet]
FILE NAME: c:\pwworking\illinois.gov_zachary.rodely\10659595\0978B25-SRIE-Schedules.dgn

PATCHING SCHEDULE SBL

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 16 INCH	CLASS C PATCHES (TYPE II) 16 INCH	CLASS C PATCHES (TYPE III) 16 INCH	CLASS C PATCHES (TYPE IV) 16 INCH	LOCATION NOTES
	(INFO ONLY)								
1	4	12	5.3	0		6			N EXIST. BUTT JT
2	4	12	5.3	0.1		6			
3	4	12	5.3	0.4		6			
4	4	12	5.3	1.2		6			
5	20	12	26.7	1.4				27	
6	4	12	5.3	1.4		6			
7	6	6	4.0	1.5	4				
8	6	6	4.0	1.5	4				
SUB-TOTAL SBL					8	30		27	
SUB-TOTAL NBL					8	24	20	27	
PROJECT TOTALS					16	54	20	54	

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
9	4	12	5.3	1.5		6			
10	4	12	5.3	1.9		6			
11	4	12	5.3	1.9		6			
12	4	12	5.3	2		6			
13	10	12	13.3	2.2		14			
14	4	12	5.3	2.2		6			
15	4	12	5.3	2.2		6			
16	10	12	13.3	2.3		14			
17	15	12	20.0	2.6			20		
18	4	12	5.3	2.7		6			
19	4	12	5.3	2.7		6			
20	4	12	5.3	2.7		6			
21	4	12	5.3	2.7		6			
22	12	12	16.0	2.9			16		
23	12	12	16.0	2.9			16		CITY LIMIT
24	15	12	20.0	3			20		
25	10	12	13.3	3.1		14			
26	10	12	13.3	3.1		14			CONDIT ST.
27	4	12	5.3			6			
28	10	12	13.3			14			BROADWAY ST.
29	15	12	20.0				20		
30	10	12	13.3			14			3RD SOUTH. ST.
31	10	12	13.3			14			
32	10	12	13.3			14			
SUB-TOTAL SBL 1						178	92		

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
33	10	12	13.3			14			
34	4	12	5.3			6			1ST SOUTH. ST.
35	8	12	10.7			11			
36	6	6	4.0		4				
37	4	12	5.3			6			1ST SOUTH. ST.
38	5	12	6.7			7			2ND NORTH. ST.
39	4	12	5.3			6			
40	4	12	5.3			6			
41	10	12	13.3			14			
42	4	12	5.3			6			
43	10	12	13.3			14			
44	4	12	5.3			6			
45	8	12	10.7			11			
46	8	12	10.7			11			
47	4	12	5.3			6			
48	4	12	5.3			6			
49	4	12	5.3			6			ADAMS/WALNUT ST.
50	4	12	5.3	4.1		6			
51	4	12	5.3	4.1		6			
52	5	12	6.7	4.1		7			
53	8	12	10.7	4.2		11			
54	8	12	10.7	4.2		11			
55	4	12	5.3	4.4		6			
56	4	12	5.3	4.4		6			
57	10	12	13.3	4.4		14			
58	15	10	16.7	4.5			17		
59	15	12	20.0	4.6			20		
60	10	12	13.3	4.7		14			
61	30	12	40.0	4.7				40	
62	10	12	13.3	4.8		14			
63	10	12	13.3	4.8		14			
64	20	12	26.7	4.8				27	
65	4	12	5.3	4.8		6			
66	5	12	6.7	4.9		7			
67	20	12	26.7	4.9				27	
68	10	12	13.3	4.9		14			
69	10	12	13.3	4.9		14			
70	6	6	4.0	4.9	4				
71	6	6	4.0	4.9	4				
72	25	12	33.3	4.9				34	
SUB-TOTAL SBL 2					12	286	37	128	

MODEL: SBL 1 (Sheet)
FILE NAME: c:\pwworking\illinois.gov_zachary.rodely\10659595\0978B25-SHE-Schedules.dgn

USER NAME = zachary.rodely	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/15/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SB PATCHING SCHEDULES

SCALE: SHEET 7 OF 8 SHEETS STA. TO STA.

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	(5,6,7)PP-1	PERRY	8	7
CONTRACT NO. 78B25				
ILLINOIS FED. AID PROJECT				

PATCHING SCHEDULE SBL (CONT.)

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
71	4	12	5.3	4.9		6			
72	15	12	20.0	5.2			20		
73	10	12	13.3	5.2		14			
74	4	12	5.3	5.2		6			
75	8	12	10.7	5.2		11			
76	15	12	20.0	5.3			20		
77	15	12	20.0	5.3			20		
78	5	12	6.7	5.3		7			
79	10	12	13.3	5.4		14			
80	4	12	5.3	5.4		6			
81	4	12	5.3	5.4		6			
82	4	12	5.3	5.5		6			
83	4	12	5.3	5.6		6			
84	4	12	5.3	5.6		6			
85	4	12	5.3	5.7		6			
86	4	12	5.3	5.8		6			
87	4	12	5.3	5.8		6			
88	4	12	5.3	5.8		6			
89	4	12	5.3	5.8		6			
90	4	12	5.3	5.8		6			
91	4	12	5.3	5.9		6			
92	4	12	5.3	5.9		6			
93	4	12	5.3	5.9		6			
94	4	12	5.3	5.9		6			
95	4	12	5.3	5.9		6			
SUB-TOTAL SBL 3						154	60		

BEGIN AT IL 154/US 51 INTERSECTION PROCEEDING NORTH (CONT.)									
NUMBER	LENGTH (FOOT)	WIDTH (FOOT)	AREA (SQ YD)	MP	CLASS C PATCHES (TYPE I) 12 INCH	CLASS C PATCHES (TYPE II) 12 INCH	CLASS C PATCHES (TYPE III) 12 INCH	CLASS C PATCHES (TYPE IV) 12 INCH	LOCATION NOTES
	(INFO ONLY)								
96	4	12	5.3	6		6			
97	4	12	5.3	6		6			
98	4	12	5.3	6.1		6			
99	4	12	5.3	6.1		6			
100	4	12	5.3	6.1		6			
101	4	12	5.3	6.2		6			
102	4	12	5.3	6.2		6			
103	4	12	5.3	6.3		6			
104	4	12	5.3	6.3		6			
105	10	12	13.3	6.3		14			
106	4	12	5.3	6.3		6			
107	6	6	4.0	6.3	4				
108	12	20	26.7	6.3				27	
109	35	12	46.7	6.3				47	
110	35	12	46.7	6.3				47	RAVEN RD.
SUB-TOTAL SBL 4					4	74		74	
SUB-TOTAL NBL 1						139	56	27	
SUB-TOTAL NBL 2						280	40	27	
SUB-TOTAL NBL 3						134	40		
SUB-TOTAL NBL 4						134	40	47	
SUB-TOTAL SBL 1						178	92		
SUB-TOTAL SBL 2					12	286	37	128	
SUB-TOTAL SBL 3						154	60		
SUB-TOTAL SBL 4					4	74		74	
PROJECT TOTALS					16	1379	365	303	

MODEL: SBL 2 (Sheet)
FILE NAME: c:\p\work\pwrtd\illinois.gov_zachary.rodely@illinois.gov\d10659595\DG78B25-ShIE-Schedules.dgn