



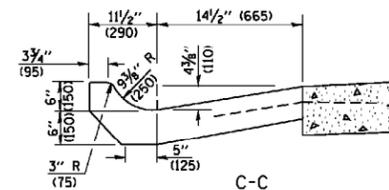
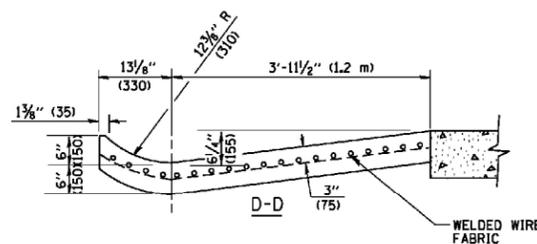


A-A *

* DIMENSIONS OF THE CURB & GUTTER AT SECTION A-A ARE SHOWN ON STATE STANDARD 606001. FOR DETAILS OF OUTLET FOR CONCRETE CURB & GUTTER, TYPE B-6.24 (B-15.60) SEE STATE STANDARD 606006.

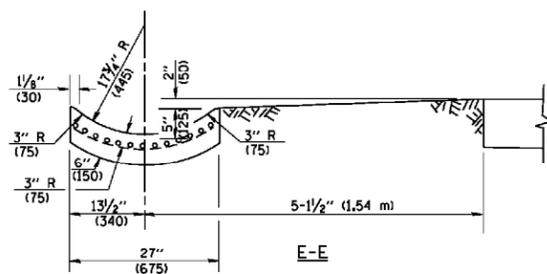

REVISED	-	R. SHAH	09-09-94
REVISED	-	R. SHAH	10-25-94
REVISED	-	E. GOMEZ	12-21-00
REVISED	-		

GENERAL NOTES

GUTTER OUTLET SHALL BE TIED TO THE PAVEMENT IN ACCORDANCE WITH DETAILS FOR LONGITUDINAL CONSTRUCTION JOINT SHOWN ON STANDARD 420001.

TIE BARS SHALL BE NO. 20 (NO.6) AT 24\"/>

IF THE AVERAGE GRADE OF PAVEMENT FOR THE DISTANCE FROM SECTION A-A TO D-D EXCEEDS 2%, THIS DISTANCE SHALL BE INCREASED 6' (1.8 m) FOR EACH 1% INCREASE IN GRADE.

QUANTITIES

FOR SECTION A-A TO E-E AND CURTAIN WALL= 1.25 CU. YDS. (0.96 m³) CLASS S1 CONCRETE (OUTLET) FOR 9\"/>

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

OUTLET FOR CONCRETE CURB AND GUTTER

DESIGNED	-	SLV	REVISED	-
DRAWN	-	SLV	REVISED	-
CHECKED	-	MJY, ST	REVISED	-
DATE	-	12/11/2012	REVISED	-

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
852	18-B-4-R-2	WILL	44	34
D-91-269-11		CONTRACT NO. 60N20		
FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT			