


IL 53 (INDEPENDENCE RD)
EXISTING TYPICAL SECTION
STA. 14+49 TO STA. 60+00
STA. 73+67 TO STA. 114+53
STA. 127+20 TO STA. 149+04


NOTE:
CLASS D PATCHES, 15 INCHES
NB & SB OUTSIDE LANES
(STA. 4+58 TO STA. 149+04)

CLASS D PATCHES, 11 INCHES
INSIDE LANES INCLUDING TURN LANES
(STA. 4+58 TO STA. 206+73)

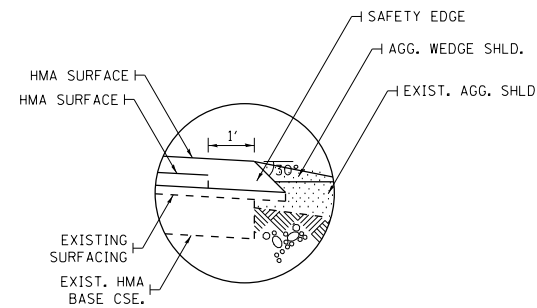

SECTION A-A

IL 53 (INDEPENDENCE RD)
PROP. SAFETY EDGE (NB & SB)
STA. 16+15 TO STA. 36+75
STA. 53+52 TO STA. 60+00
STA. 73+67 TO STA. 113+76
STA. 127+54 TO STA. 149+04

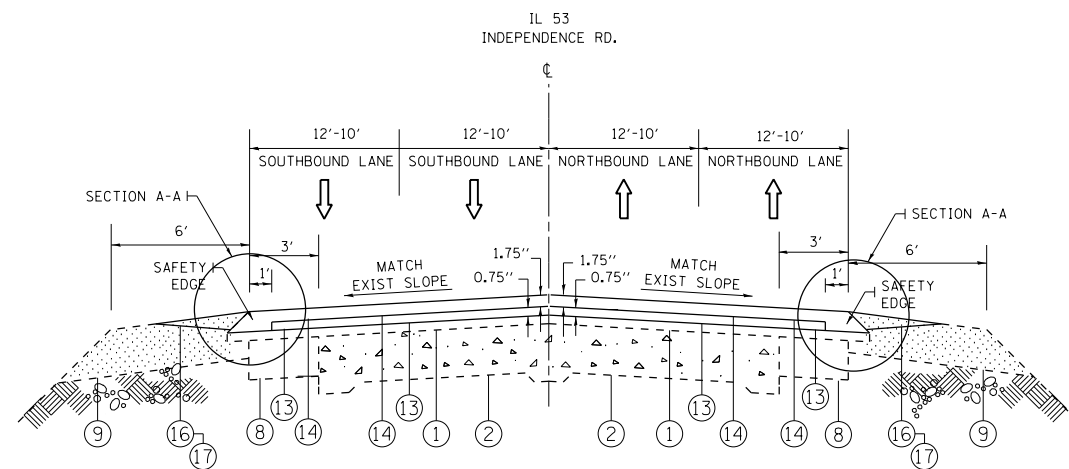

IL 53 (INDEPENDENCE RD)
PROPOSED TYPICAL SECTION
STA. 14+49 TO STA. 60+00
STA. 73+67 TO STA. 114+53
STA. 127+20 TO STA. 149+04

NOTE:
CLASS D PATCHES, 15 INCHES
NB & SB OUTSIDE LANES
(STA. 4+58 TO STA. 149+04)

CLASS D PATCHES, 11 INCHES
INSIDE LANES INCLUDING TURN LANES
(STA. 4+58 TO STA. 206+73)

LEGEND

- ① EXISTING HMA SURFACING, ± 6.50"
- ② EXISTING P.C. CONCRETE PAVEMENT, (9"-7"-9")
- ③ EXISTING P.C. CONCRETE BASE COURSE, ± 9"
- ④ EXISTING MOUNTABLE MEDIAN WITH CURB & GUTTER TYPE M-2.12
- ⑤ EXISTING CONCRETE BARRIER MEDIAN, TYPE B-12.12
- ⑥ EXISTING COMB. CONC. C&G, TYPE B-6.24
- ⑦ EXISTING BITUMONOUS SHOULDER, 8"
- ⑧ EXISTING HMA BASE COURSE, ± 11"
- ⑨ EXISTING AGGREGATE SHOULDER, TYPE B, 8"
- ⑩ PROPOSED HMA SURFACE REMOVAL, 2-1/2"
- ⑪ PROPOSED HMA SURFACE REMOVAL, 1-1/2"
- ⑫ PROPOSED PCC SURFACE REMOVAL, 1"
- ⑬ PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- ⑭ PROPOSED POLYMERIZED HMA SURFACE COURSE, MIX "F", N90, 1-3/4"
- ⑮ PROPOSED COMB. CONC. C&G REMOVAL AND REPLACEMENT
- ⑯ PROPOSED AGGREGATE WEDGE SHOULDER, TYPE B
- ⑰ PROPOSED GRADING AND SHAPING SHOULDERS

NOTE:
• LOCATIONS TO BE DETERMINED IN THE FIELD BY THE ENGINEER
" THE CONTRACTOR SHALL MILL FIRST PRIOR TO PATCHING".

FILE NAME =	USER NAME = galbenjr	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	IL 53 (N. INDEPENDENCE BLVD.) EXISTING AND PROPOSED TYPICAL SECTIONS			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
et:\pwork\pwork\galbenjr\d0249519\013111-sh-t-plan.dgn	PLOT SCALE = 100.0000' / in.	DRAWN -	REVISED -					112	MY-RS-2	WILL	35	7
PLOT DATE = 11/9/2012	DATE -	CHECKED -	REVISED -		SCALE:			SHEET NO. OF SHEETS STA. TO STA.		CONTRACT NO. 60N44		
								ILLINOIS FED. AID PROJECT				