



METAL SHELL PILE TABLE

Designation and outside diameter	Wall thickness t	Weight per foot (Lbs./ft.)	Inside volume (yd. ³ /ft.)
PP12	0.179"	22.60	0.0274
PP12	0.250"	31.37	0.0267
PP14	0.250"	36.71	0.0368
PP14	0.312"	45.61	0.0361

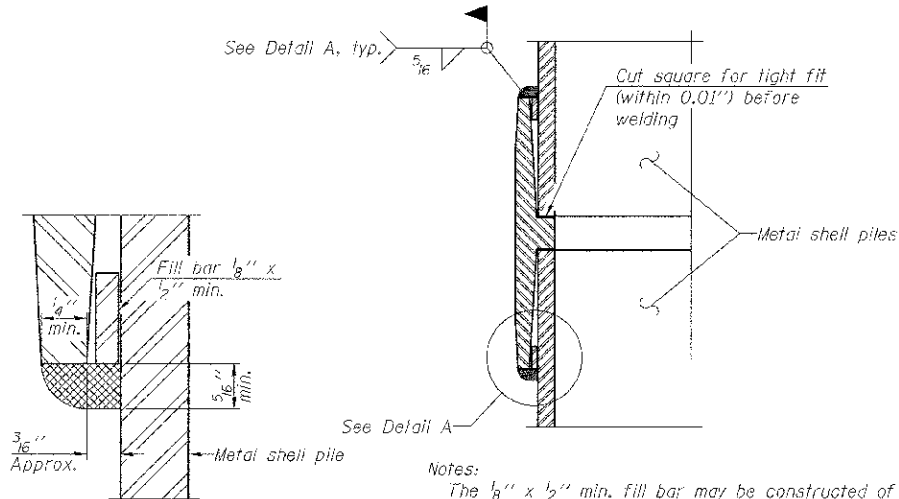


DETAIL A

WELDED COMMERCIAL SPLICE

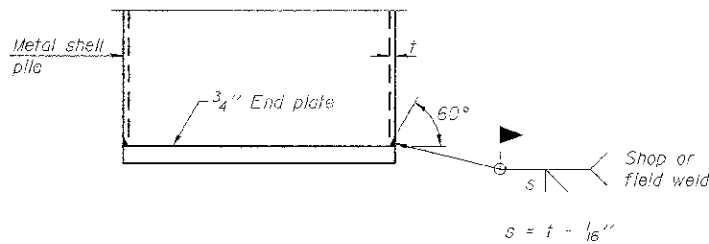


END PLATE ATTACHMENT

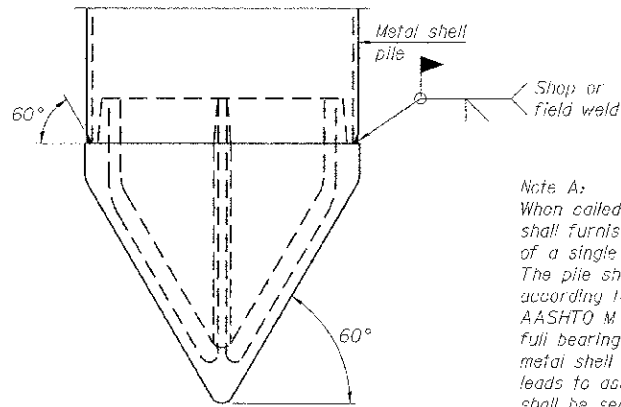

METAL SHELL PILE SHOE ATTACHMENT


(See Note A)

Note A:
When called for on the plans, the Contractor shall furnish metal shell pile shoes consisting of a single piece conical pile point as shown. The pile shoes shall be cast in one piece steel according to either ASTM A 148 Grade 90-60 or AASHTO M 103 Grade 65-35 and shall provide full bearing over the full circumference of the metal shell pile. The pile shoe shall have tapered leads to assure proper alignment and fitting and shall be secured to the pile with a circumferential weld.

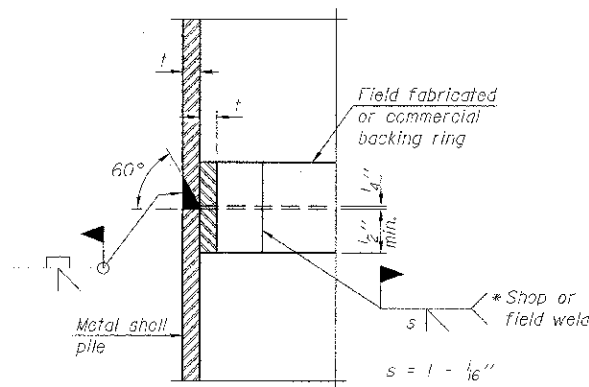


COMPLETE PENETRATION WELD SPLICE


* Field fabricated backing ring may be made from pile shell by removing segment to allow reducing circumference and vertically rejoin with partial joint penetration weld.

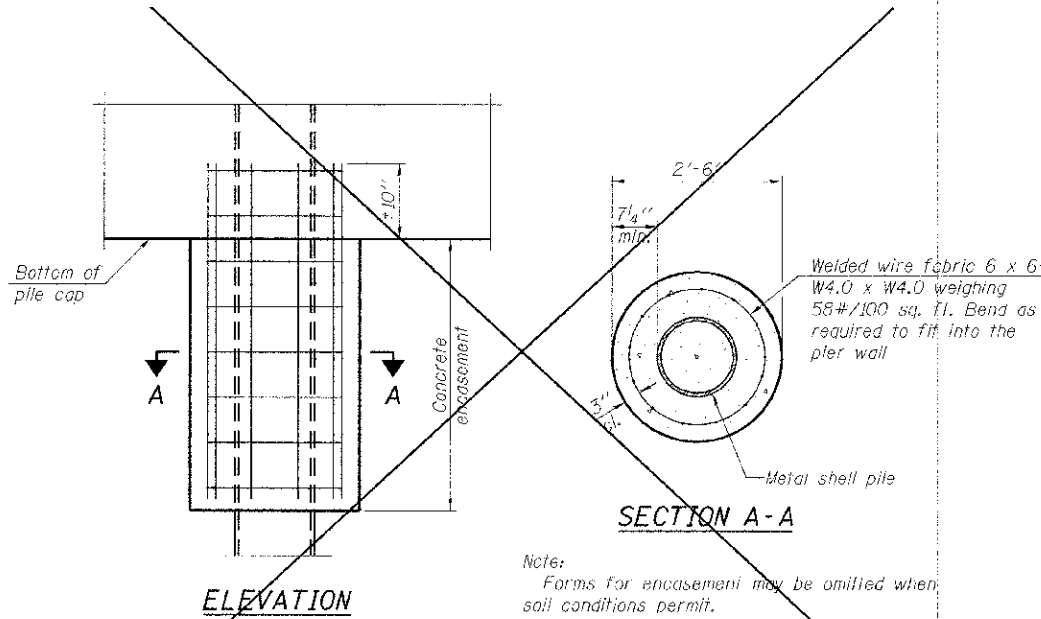

CONCRETE ENCASEMENT AT PIERS

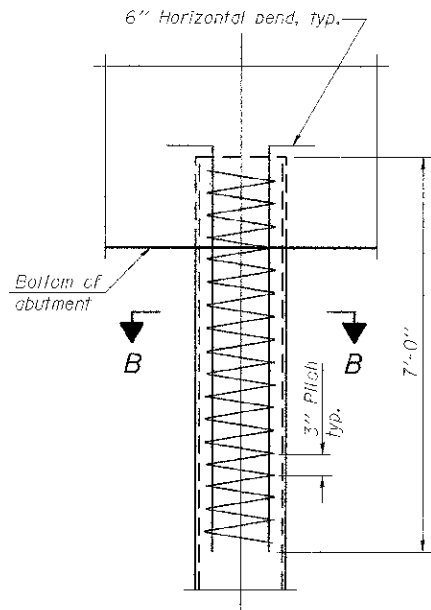

ELEVATION



SECTION B-B

METAL SHELL REINFORCEMENT AT ABUTMENTS AND PIERS

Note:
The metal shell piles shall be according to ASTM A 252 Grade 3.

F-MS

1-27-12

TranSystems

USER NAME = redanteFord

DESIGNED KAH

REVISD -

CHECKED - WJC

REVISD -

DRAWN - JDC

REVISD -

CHECKED - WJC

REVISD -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

METAL SHELL PILE DETAILS
STRUCTURE NO. 016-6921

SHEET NO. 9 OF 13 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0341	09-00058-00-8T	COOK	43	26
CONTRACT NO. 63809				

ILLINOIS FED. AID PROJECT