APPROXIMATELY 15' (4.5 m) OR 8' (2.4 m) BACK FROM AND PARALLEL TO GATE, IF PRESENT. NOTES * Minimum Distance 400' for 55 MPH 250' for 45 MPH 100' for 35 MPH or Less ON MULTI-LANE ROADS, THE STOP LINES SHALL EXTEND ACROSS ALL APPROACH LANES AND SEPARATE RXR SYMBOLS SHALL BE PLACED ADJACENT TO EACH OTHER IN

PAVEMENT MARKINGS AT

RAILROAD-HIGHWAY GRADE CROSSING

EACH LANE.

OF THE MUTCD.


WHEN THE PAVEMENT MARKING SYMBOL

TO THE ADVANCE WARNING SIGN (W10-1) AS PLACED BY TABLE II-1, CONDITION B

IS USED, A PORTION OF THE SYMBOL SHOULD BE LOCATED DIRECTLY ADJACENT

RAILROAD CROSSING WITH INTERCONNECT ONLY

RAILROAD CROSSING WITH INTERCONNECT AND PRE-SIGNALS

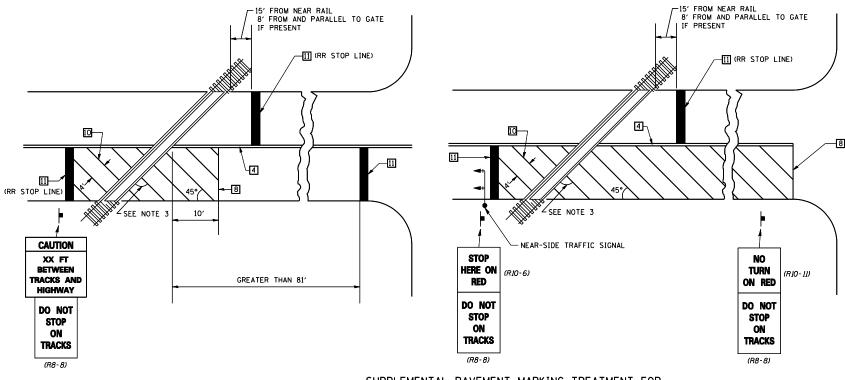

SUPPLEMENTAL PAVEMENT MARKING TREATMENT FOR RAILROAD-HIGHWAY GRADE CROSSING

SCALE:

GENERAL NOTES

- SUPPLEMENTAL PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- EXTEND PAVEMENT MARKINGS TO THE INTERSECTION ONLY WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL PAVEMENT MARKINGS AND THE TRACK WOULD BE LESS THAN 20°, THE PAVEMENT MARKINGS SHOULD BE PLACED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DISTRICT	5	DETAIL	NO.	7800AAAA
----------	---	--------	-----	-----------------

FILE NAME =	USER NAME = CFC	DESIGNED -	REVISED -	11/06
\v8-ns\D570615-7800aaaa.dgn		DRAWN -	REVISED -	09/2009 - KJT
	PLOT SCALE = 40.0000 '/ IN.	CHECKED -	REVISED -	
	PLOT DATE = 6/14/2011	DATE -	REVISED -	

STATE OF ILLINOIS						
DEPARTMENT	0F	TRANSPORTATION				

PAVEMENT MARKING AND MARKERS (RURAL & URBAN APPLICATIONS)								
	SHEET NO. 4 OF	4 SHEETS	STA.	TO STA.				

F.A.P. RTE.	SECTION				COUNTY	TOTAL SHEETS	SHEET NO.	
840		1208	3R-1			VERMILION	44	35
						CONTRACT	I NO. 1	70615
EEU DO	TOID DIST	NO	THE TWO IS	EED	1 1	N DDO IECT		