


Notes:

- Expansion bolts shall consist of self drilling expansion shields and 3/4" Ø hooked bolts. Hooked bolts shall extend a minimum of 9" into new concrete. Minimum Certified Proof Load - 4,080 lbs.
- Use minimum of 1 (one) expansion bolt at each corner.

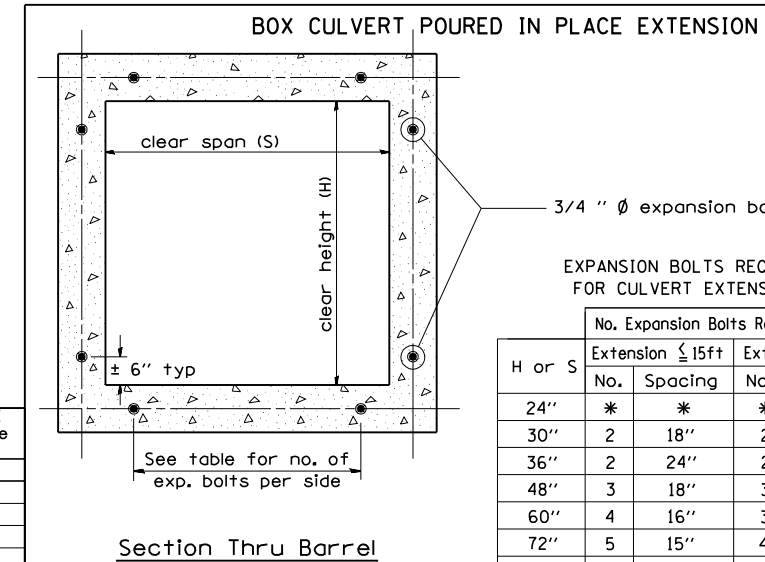

EXPANSION BOLTS REQUIRED FOR CULVERT EXTENSIONS

H or S	Extension ≤ 15ft		Extension > 15ft	
	No.	Spacing	No.	Spacing
24"	*	*	*	*
30"	2	18"	2	18"
36"	2	24"	2	24"
48"	3	18"	3	18"
60"	4	16"	3	24"
72"	5	15"	4	20"
84"	5	18"	4	24"
96"	6	17"	5	21"
108"	6	19"	5	24"
120"	7	18"	6	21"
132"	8	17"	6	24"
144"	8	19"	7	22"

Note: Number of expansion bolts in table based on non-skewed culverts.
* Use minimum 1 (one) expansion bolt in each corner.

Station	Section Type	Skew	Existing Culvert Size	Proposed Culvert		Collar		Reinforcement Bars								Expansion Bolts 3/4" Each	Class S1 Concrete Collar yd ³		
				I.D.	O.D.	Height	Width	S bar				U bar							
								No.	Size	Length	lb	No.	Size	A	B			Lap	Length
100+62	A	0°	2'x1.5'	30"	37"	49"	49"	4	5	18"	4	5	43"	30"	17"	8'-7"	40	4	0.4
Total																			