



TEMPORARY PHASE DESIGNATION DIAGRAM

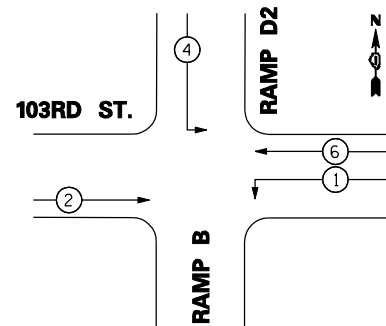

LEGEND
 ○ → DUAL ENTRY PHASE
 • NUMBER REFERS TO ASSOCIATED PHASE

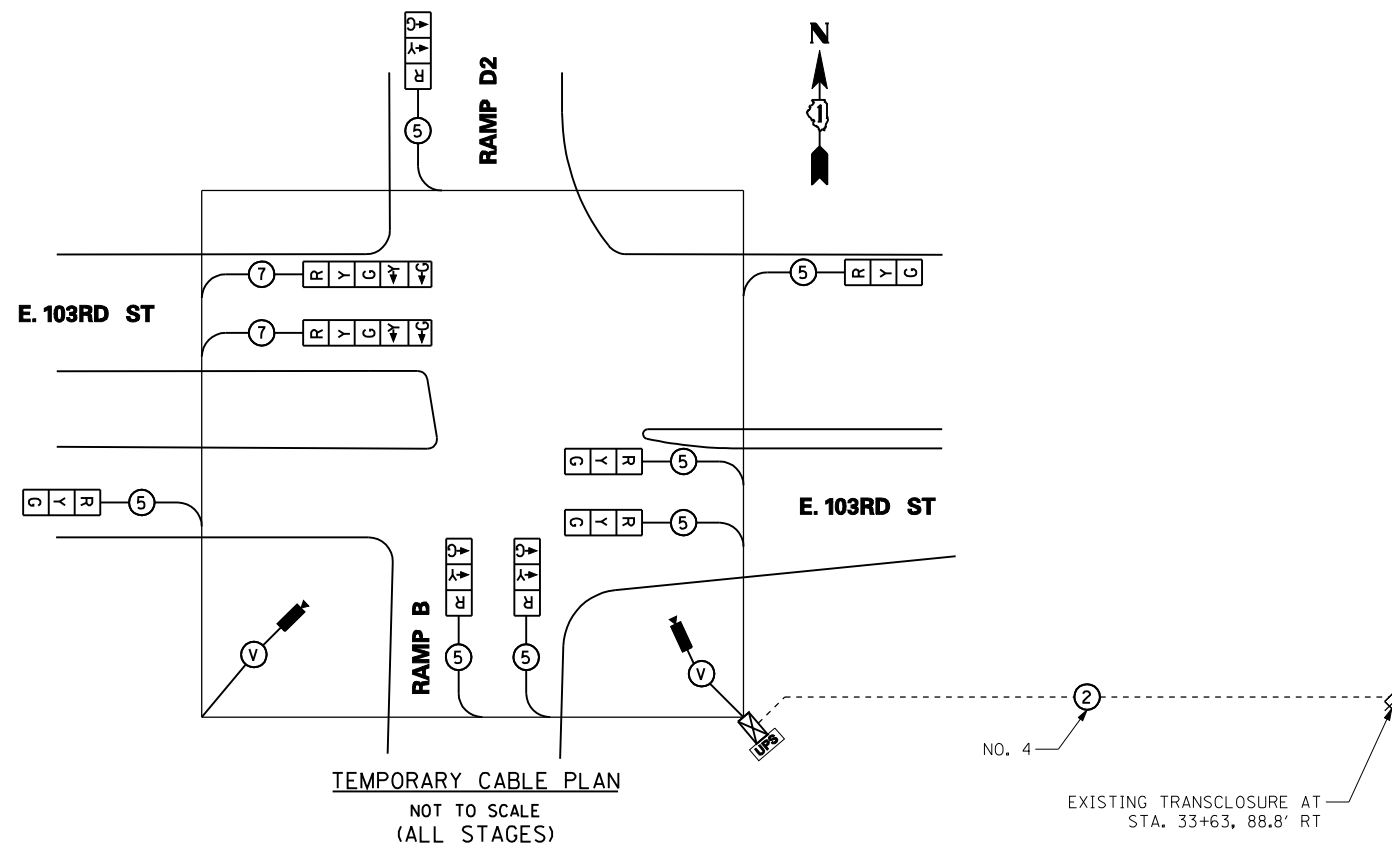

TEMPORARY CABLE PLAN
 NOT TO SCALE
 (ALL STAGES)

CONSTRUCTION NOTES
 CONTRACTOR SHALL INSTALL CDOT APPROVED SIGNAL TIMING FOR TEMPORARY SIGNAL OPERATION AT THIS LOCATION. THIS WORK SHALL NOT BE PAID FOR SEPARATELY AND SHALL BE CONSIDERED INCLUDED IN "TEMPORARY TRAFFIC SIGNAL INSTALLATION".

TEMPORARY TRAFFIC SIGNAL INSTALLATION
 ELECTRICAL SERVICE REQUIRMENTS
 103RD STREET & STONY ISLAND AVE SB RAMP

TYPE	NO. LAMPS	WATTAGE INCAND. -LED.	% OPERATION	TOTAL WATTAGE
SIGNAL (RED)	9	17	0.50	76.50
(YELLOW)	9	25	0.25	56.25
(GREEN)	6	15	0.25	22.50
ARROW	7	12	0.10	8.40
PED. SIGNAL			1.00	
CONTROLLER	1	100	1.00	100.00
FLASHER				
CAMERAS	1	150	1.00	150.00
			TOTAL =	413.65

ENERGY COSTS TO:
 ILLINOIS DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAY/ DISTRICT 1
 201 W CENTER COURT/ SCHAUMBERG, IL 60196-1096

ENERGY SUPPLY CONTACT: STEVE FITZGERALD
 PHONE: (708) 235-2327
 COMPANY: COMED

12/6/2012 9:30:37 AM s:\projects\3010 stony island feeder - bbe\project work\disciplines\traffic_signals\sheet\0160J12-sht-temp ts.01a.dgn

USER NAME = sadhikari	DESIGNED - SA	REVISED -		STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TEMPORARY TRAFFIC CONTROL SIGNAL PLAN 103RD ST. & STONY ISLAND AVE. RAMP B /RAMP D2	F.A.I. RTE. 94	SECTION 2012-060-BR	COUNTY COOK	TOTAL SHEETS 285	SHEET NO. 123		
PLOT SCALE = 50.000' / IN.	CHECKED - BKS	REVISED -				SCALE: NONE	SHEET NO. 2 OF 4 SHEETS	STA. TO STA.	CONTRACT NO. 60V61		ILLINOIS FED. AID PROJECT	
PLOT DATE = 12/6/2012	DATE - 12/07/2012	REVISED -										