

109.04 OF THE STANDARD SPECIFICATIONS. BITUMINOUS CONCRETE REQUIRED TO CONSTRUCT THE ENTRANCES SHALL BE IN

ACCORDANCE WITH THE APPLICABLE PORTIONS OF SECTION 406 AND 408 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER.

WHEN THE BITUMINOUS CONCRETE PROPOSED FOR THE IMPROVEMENT IS THICKER THAN 75 mm (3 INCHES) AND REQUIRE PLACEMENT IN MORE THAN ONE LIFT. THE BOTTOM LIFT(S) SHALL MEET THE REQUIREMENTS OF BITUMINOUS BASE COURSE IN SECTION 406 OF THE STANDARD SPECIFICATIONS AND THE TOP LIFT OF 50 mm (2 INCHES) SHALL MEET THE REQUIREMENTS OF BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE.

THIS WORK WILL BE PAID FOR IN ACCORDANCE WITH SECTIONS 351, 358, 408, 423 AND 440 OF THE STANDARD SPECIFICATIONS.

> ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

-SHOULDER LINE

GENERAL NOTES:


ON THIS PROJECT.

ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT SIX DETAILS FOR RURAL / URBAN ENTRANCE, MAILBOX TURNOUT & SIDEROADS W / O CONCRETE GUTTER (PPP - PROJECTS)


SHEET 1 OF 3

SCALE: VERT. HORIZ.

DRAWN BY CADD

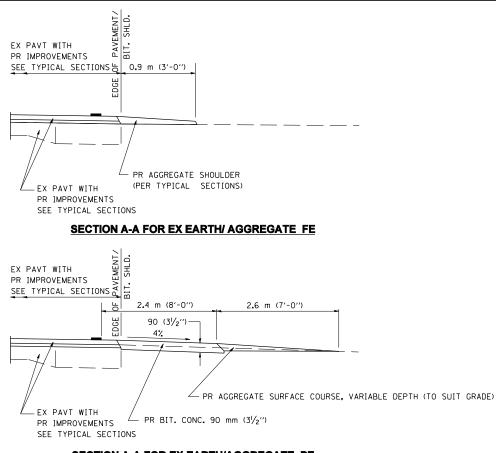

SECTION A-A FOR EX EARTH/AGGREGATE PE

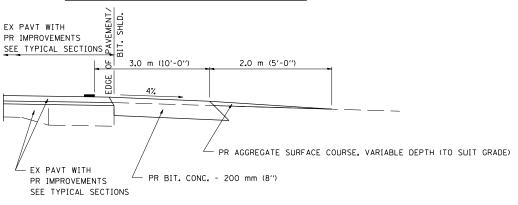

SECTION A-A FOR EX EARTH/AGGREGATE CE & SIDE ROAD EX PAVT WITH PR IMPROVEMENTS SEE TYPICAL SECTIONS ₹ H 2.4 m (8'-0") PE 3.0 m (10'-0") CE PR SAW CUT (INCIDENTAL) 11-1-1-1-1-1-1-1-1 PR BIT. SURFACE REMOVAL - BUTT JOINT (IF EXISTING BITUMINOUS) PR PCC SURFACE REMOVAL - BUTT JOINT (IF EXISTING PCC) EX PAVT WITH - PR BIT. CONCRETE VAR DEPTH \pm 38 mm (1 $\frac{1}{2}$ ") PR IMPROVEMENTS SEE TYPICAL SECTIONS

SECTION A-A FOR EX BITUMINOUS/ PC CONCRETE PE, CE & SIDE ROAD

SIDEROAD WIDTH (SEE SCHEDULE) MATCH EXISTING PR 4' BIT. SHLD. (W/ INCID. BIT. SURF.) PROPOSED AGG SHOULDER (IF APPLICABLE) PR BIT. SHLD. (IF APPLICABLE, DO NOT EXTEND THRU SIDE ROAD) EDGE OF PAVEMENT EDGE LINE - PAVEMENT MARKING -

EΕ

3.6 m (12'-0") MIN. TO 7.3 m (24'-0") MAX. - FE & PE

7.3 m (24'-0") MIN. TO 10.7 m (35'-0") MAX. - CE

EΕ

5.0 m (15'-0") - RURAL

3.0 m (10'-0") - URBAN

R.O.W. LINE

FOR EX EARTH OR AGGREGATE SURFACES:

PR BIT SURFACE REMOVAL (IF APPLICABLE) PR AGGREGATE SHOULDER THRU - FE

PR BITUMINOUS CONCRETE 90 mm (31/2") - PE

PR BITUMINOUS CONCRETE 200mm (8") - CE

FOR EX BITUMINOUS CONCRETE SURFACES:

PR PCC SURFACE REMOVAL-BUTT JOINT

FOR EX PCC SURFACES:

PR BITUMINOUS SURFACE REMOVAL-BUTT JOINT

PR EARTH SHOULDER

NOTE : IF BIT, SHIDS ARE PROPOSED THEY SHOULD NOT EXTEND THROUGH SIDEROADS

DGN-SPEC *DATE-TIME* \$TIME\$ *USER*

ENT PPP