




F.A. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	03-00123-03-BT	Tazewell	43	34
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
CONTRACT # 89302				

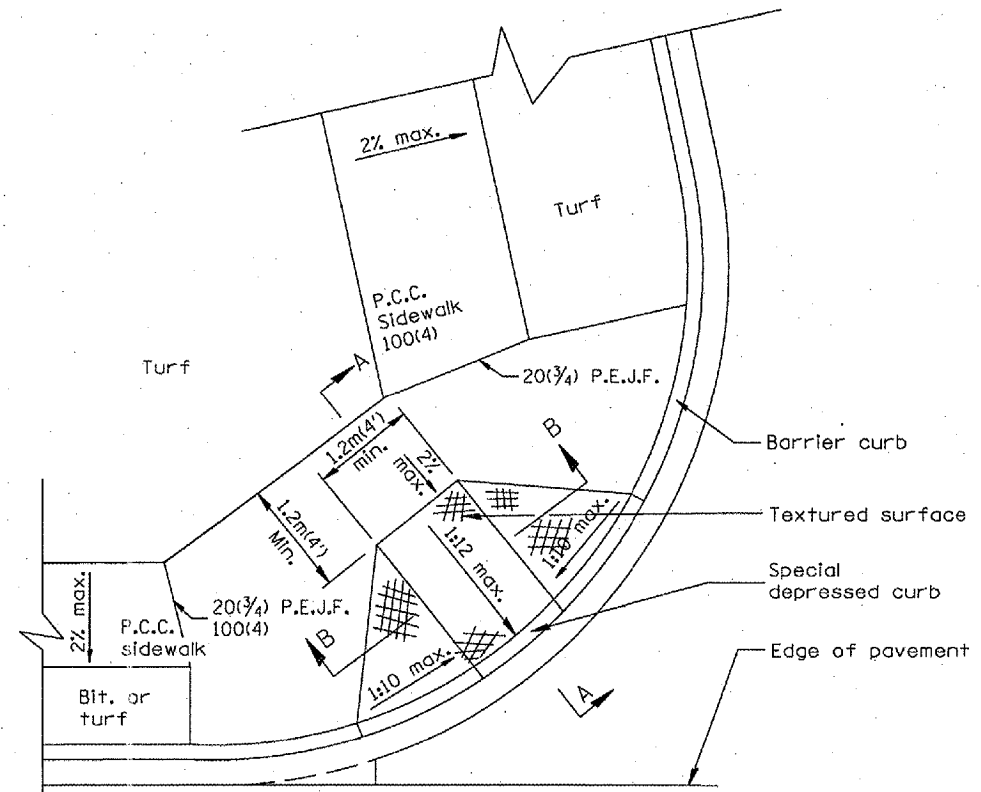


CASE 1
TYPE B RAMP WITH 1.2m(4') OR MORE AT BACK OF RAMP

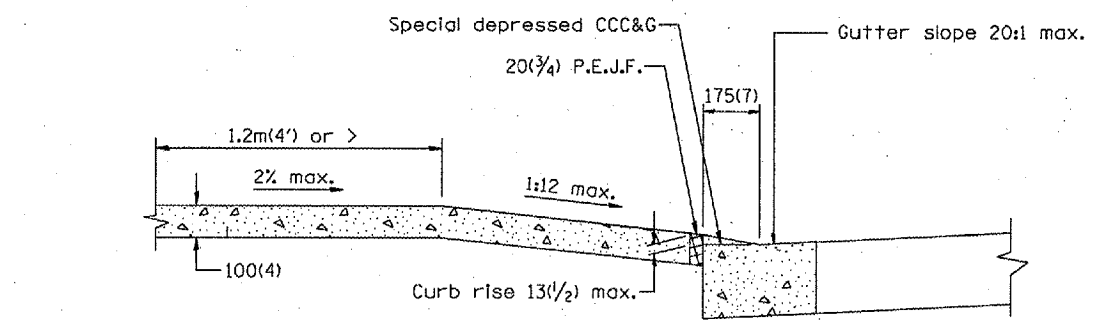


SEC. A-A

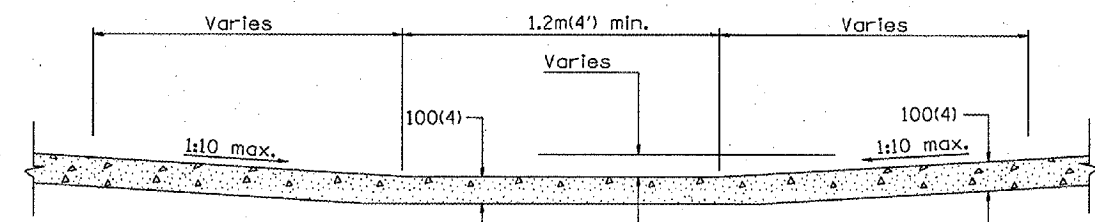


SEC. B-B

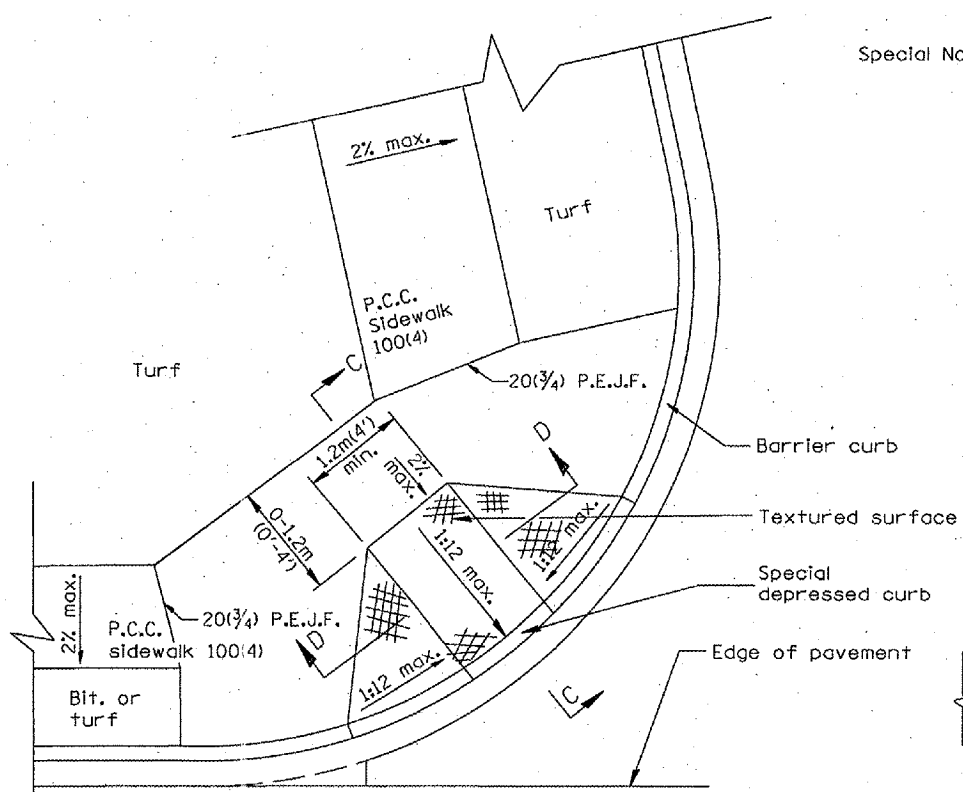

CASE 2
TYPE B RAMP WITH LESS THAN 1.2m(4') AT BACK OF RAMP

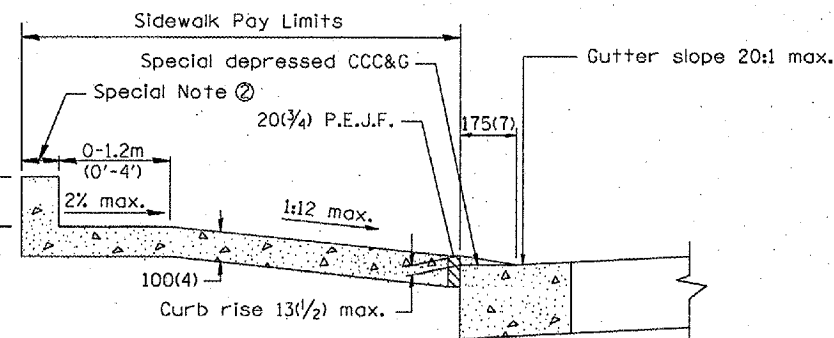

SEC. C-C

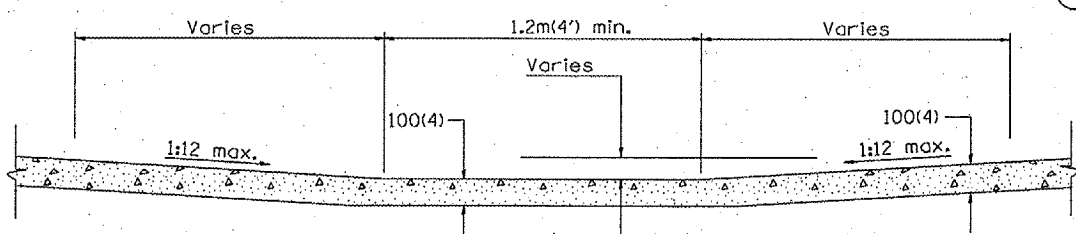

SEC. D-D

GENERAL NOTES

1. Refer to State Standard 424001 for texturing and other design elements.
2. The controls shown on this standard are applicable to Type B Curb and Combination Concrete Curb & Sidewalk construction.
3. The maximum length of texturing shall be 1.8m(6') unless otherwise shown.

SPECIAL NOTES

- ① Variable height edge treatment as required to match existing conditions.
Maximum height = 225(9)
- ② 100(4) wall to be built outside of plan sidewalk width, if ROW allows.

All dimensions are in millimeters (inches) unless otherwise noted.

ILLINOIS DEPARTMENT OF TRANSPORTATION	
DISTRICT CADD STANDARD	
SIDEWALK RAMPS	
ACCESSIBLE TO	
THE DISABLED	
CADD std. NO. 424001-D4	SHEET 1 of 2
SCALE: NOT DRAWN TO SCALE	DRAWN BY CADD
DATE **DATE**	CHECKED BY

DATE	REVISIONS	BY
1-1-97	RENUM. A-5.01, NEW REVISION BOX, REVISED TITLE.	T.P.

DESIGNER NOTES:
 1. THIS DRAWING SHOULD BE USED IN CONJUNCTION WITH STATE STANDARD 424001.
 2. DESIGNER SHOULD REVIEW BOE PROCEDURE MEMORANDUM 94-12, DATED 7-1-94 ENTITLED "ACCESSIBILITY STANDARDS FOR THE DISABLED".
 DATE