FIELD ENTRANCE / PRIVATE ENTRANCE / COMMERCIAL ENTRANCE

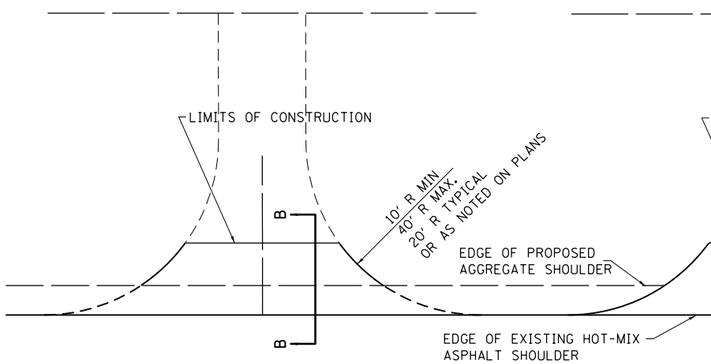

PRIVATE ENTRANCE

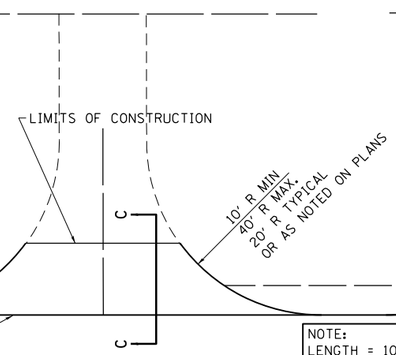

COMMERCIAL ENTRANCE

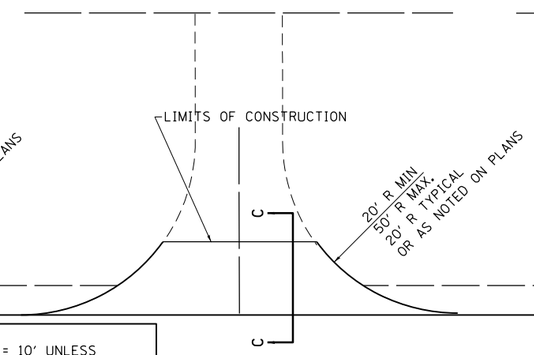

PUBLIC ROAD APPROACH

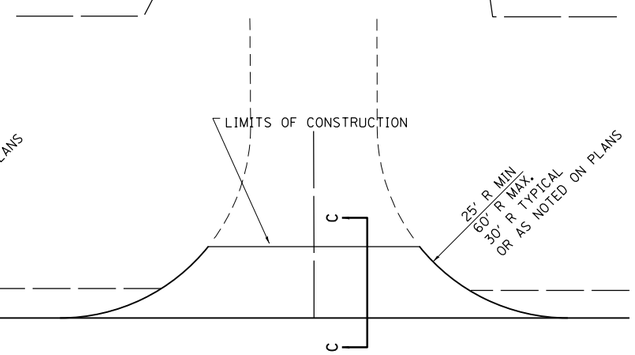

NOTE:
LENGTH = 10' UNLESS
OTHERWISE NOTED ON PLANS.

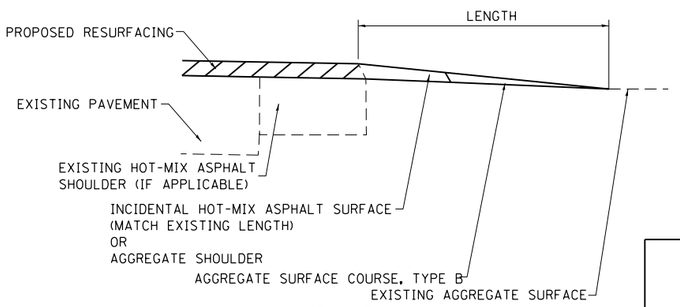

SECTION B-B



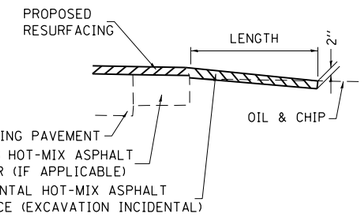

SECTION C-C

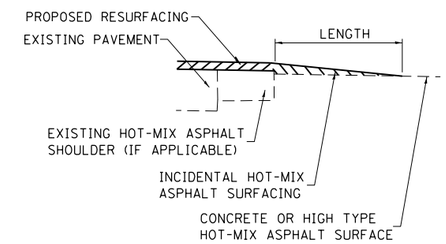

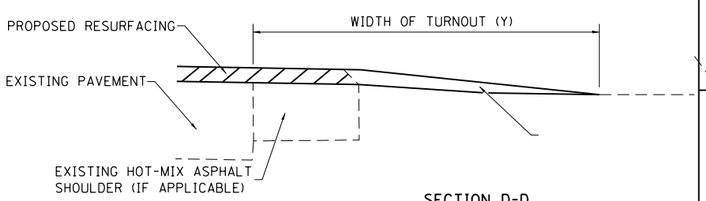

SECTION D-D

SIDE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
			TON	TON
Lt	574+06	CE	1.9	2.6
Rt	575+37	PE	2.5	0.8
Rt	576+18	PRA	5.8	
Lt	576+18	PRA	12.8	
Rt	578+14	PE	0.9	1.1
Rt	580+91	FE	0.6	0.9
Rt	508+91	FE	0.6	0.9
Lt	590+04	PE	1.8	2.2
Lt	592+70	PE	2.3	
Lt	594+11	PE	1.2	1.5
Lt	594+50	PE	1.2	1.5
Rt	595+76	FE	0.6	0.9
Lt	596+04	PE	1.7	2.3
Lt	597+72	PE	1.4	1.7
Lt	601+16	FE	1.2	1.6
Rt	610+79	FE	1.8	
Rt	622+72	PRA	4.3	
Lt	622+72	PRA	4.6	
Rt	627+80	PE	1.2	1.6
Rt	629+45	PE	3.4	4.8
Rt	631+03	PE	3.7	

SIDE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
			TON	TON
Rt	646+60	FE	0.6	0.9
Rt	648+20	CE	8.3	
Rt	653+40	CE	8.3	
Rt	655+59	FE	0.6	0.9
Rt	669+35	PRA	3.2	
Lt	669+35	FE	1.0	1.2
Rt	675+75	FE	0.6	0.9
Lt	684+36	PRA	5.2	
Rt	685+60	FE	1.9	2.7
Rt	695+05	PRA	7.3	
Lt	713+00	FE	1.2	1.7
Rt	726+75	FE	0.6	0.9
Rt	742+55	PRA	4.7	
Lt	742+55	PRA	3.3	
Rt	749+70	FE	1.7	0.6
Lt	769+80	FE	1.0	1.4
Rt	798+60	PRA	6.4	
Rt	804+18	FE	0.7	1.1
		TOTAL=	401.5	120.8

SIDE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
			TON	TON

SIDE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
			TON	TON

SIDE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
			TON	TON

FE=FIELD ENTRANCE
PE=PRIVATE ENTRANCE
CE=COMMERCIAL ENTRANCE
PRA - PUBLIC ROAD APPROACH
MBT - MAILBOX TURNOUT

TYPICAL SECTION AT MAILBOX TURNOUT

NOTE: SEE STANDARD 406201 FOR MAILBOX TURNOUT DETAILS

NOTES

THE COST OF EXCAVATION IS INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

IF THERE IS NOT EXISTING HOT-MIX ASPHALT SHOULDER THEN THE ENTRANCE TAPER STARTS AT THE EDGE OF EXISTING PAVEMENT.

THE COST OF THE BITUMINOUS MATERIALS AND AGGREGATE (PRIME COAT) FOR ENTRANCES AND PUBLIC ROAD APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

•(125,126,126R)RS-2&(126BR)B
••FAS 1536 & FAU 7464

FILE NAME = c:\pw_work\pwidot\teasleyck\d0121473\D774156-sht-sch.dgn	USER NAME = teasleyck	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
	PLOT DATE = 10/30/2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

RURAL ENTRANCE SCHEDULE AND MAILBOX TURNOUT DETAILS WITH SHOULDERS

SCALE: | SHEET 2 OF 2 SHEETS | STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
••	•	Macon, Piatt	44	15
		CONTRACT NO. 74156		
		ILLINOIS FED. AID PROJECT		