


NOTES:

THE TRAFFIC CONTROL SHALL BE SET UP AS PER STANDARD 701316 EXCEPT FOR THE CHANGES DETAILED ON THIS SHEET.

THE STOP BARS SHOWN ARE PAID FOR UNDER STANDARD 701316. ALL OTHER STRIPING SHALL BE PAID FOR AT THE UNIT PRICE FOR PAINT PAVEMENT MARKING, LINE 5".

AFTER FINAL INSPECTION AND ACCEPTANCE OF THE TRAFFIC CONTROL SETUP, ALL TRAFFIC CONTROL DEVICES AND TRAFFIC SIGNALS SHALL BECOME PROPERTY OF IDOT. THE CONTRACTOR SHALL INCLUDE THIS EXPENSE IN THE BID PRICES FOR EACH ITEM.

TYPE 3 BARRICADES SHALL BE PLACED AT THE ENDS OF THE PCC DECK BEAM SPANS (SPANS 2 AND 3). THE APPROXIMATE STATIONS SHALL BE 103+39 AND 104+41. THE COST OF THE BARRICADES SHALL BE INCLUDED IN THE BID PRICE FOR TRAFFIC CONTROL AND PROTECTION, STANDARD 701316 (SPECIAL).

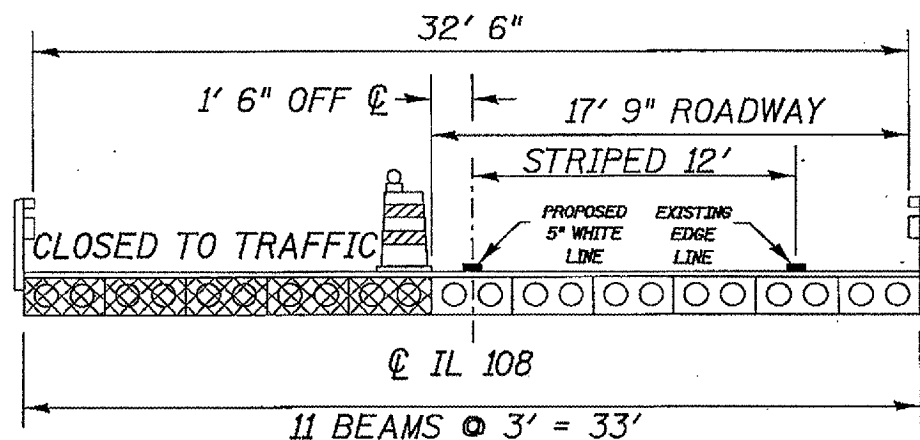

BRIDGE CROSS SECTION
FACING EAST

NOT TO SCALE

TRAFFIC CONTROL DETAIL
FAP 769 (IL 108)
SECTION (110)TS
MACOUPIN COUNTY