
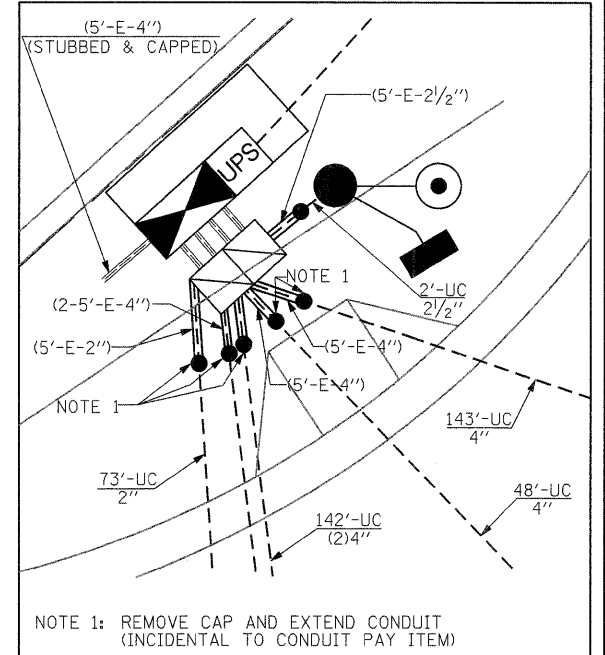
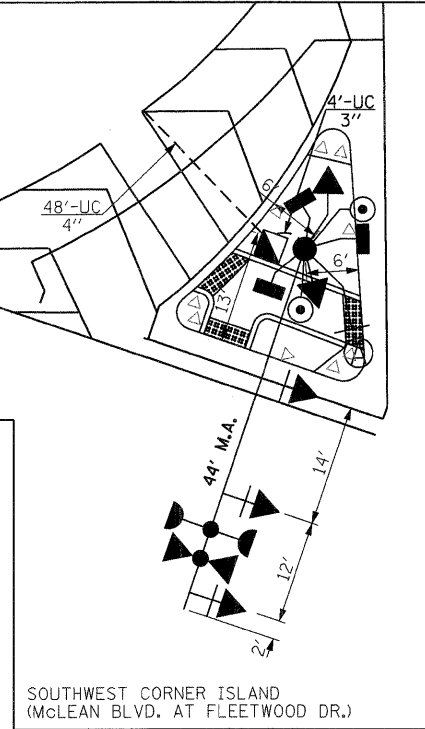


THE PROPOSED TRAFFIC SIGNALS SHALL BE CONSTRUCTED AND PUT IN OPERATION PRIOR TO STARTING ANY CONSTRUCTION WORK IN STAGE III.

(A)  
LEFT ON GREEN ARROW ONLY  
R10-5, 24" X 30" (4 REQUIRED)

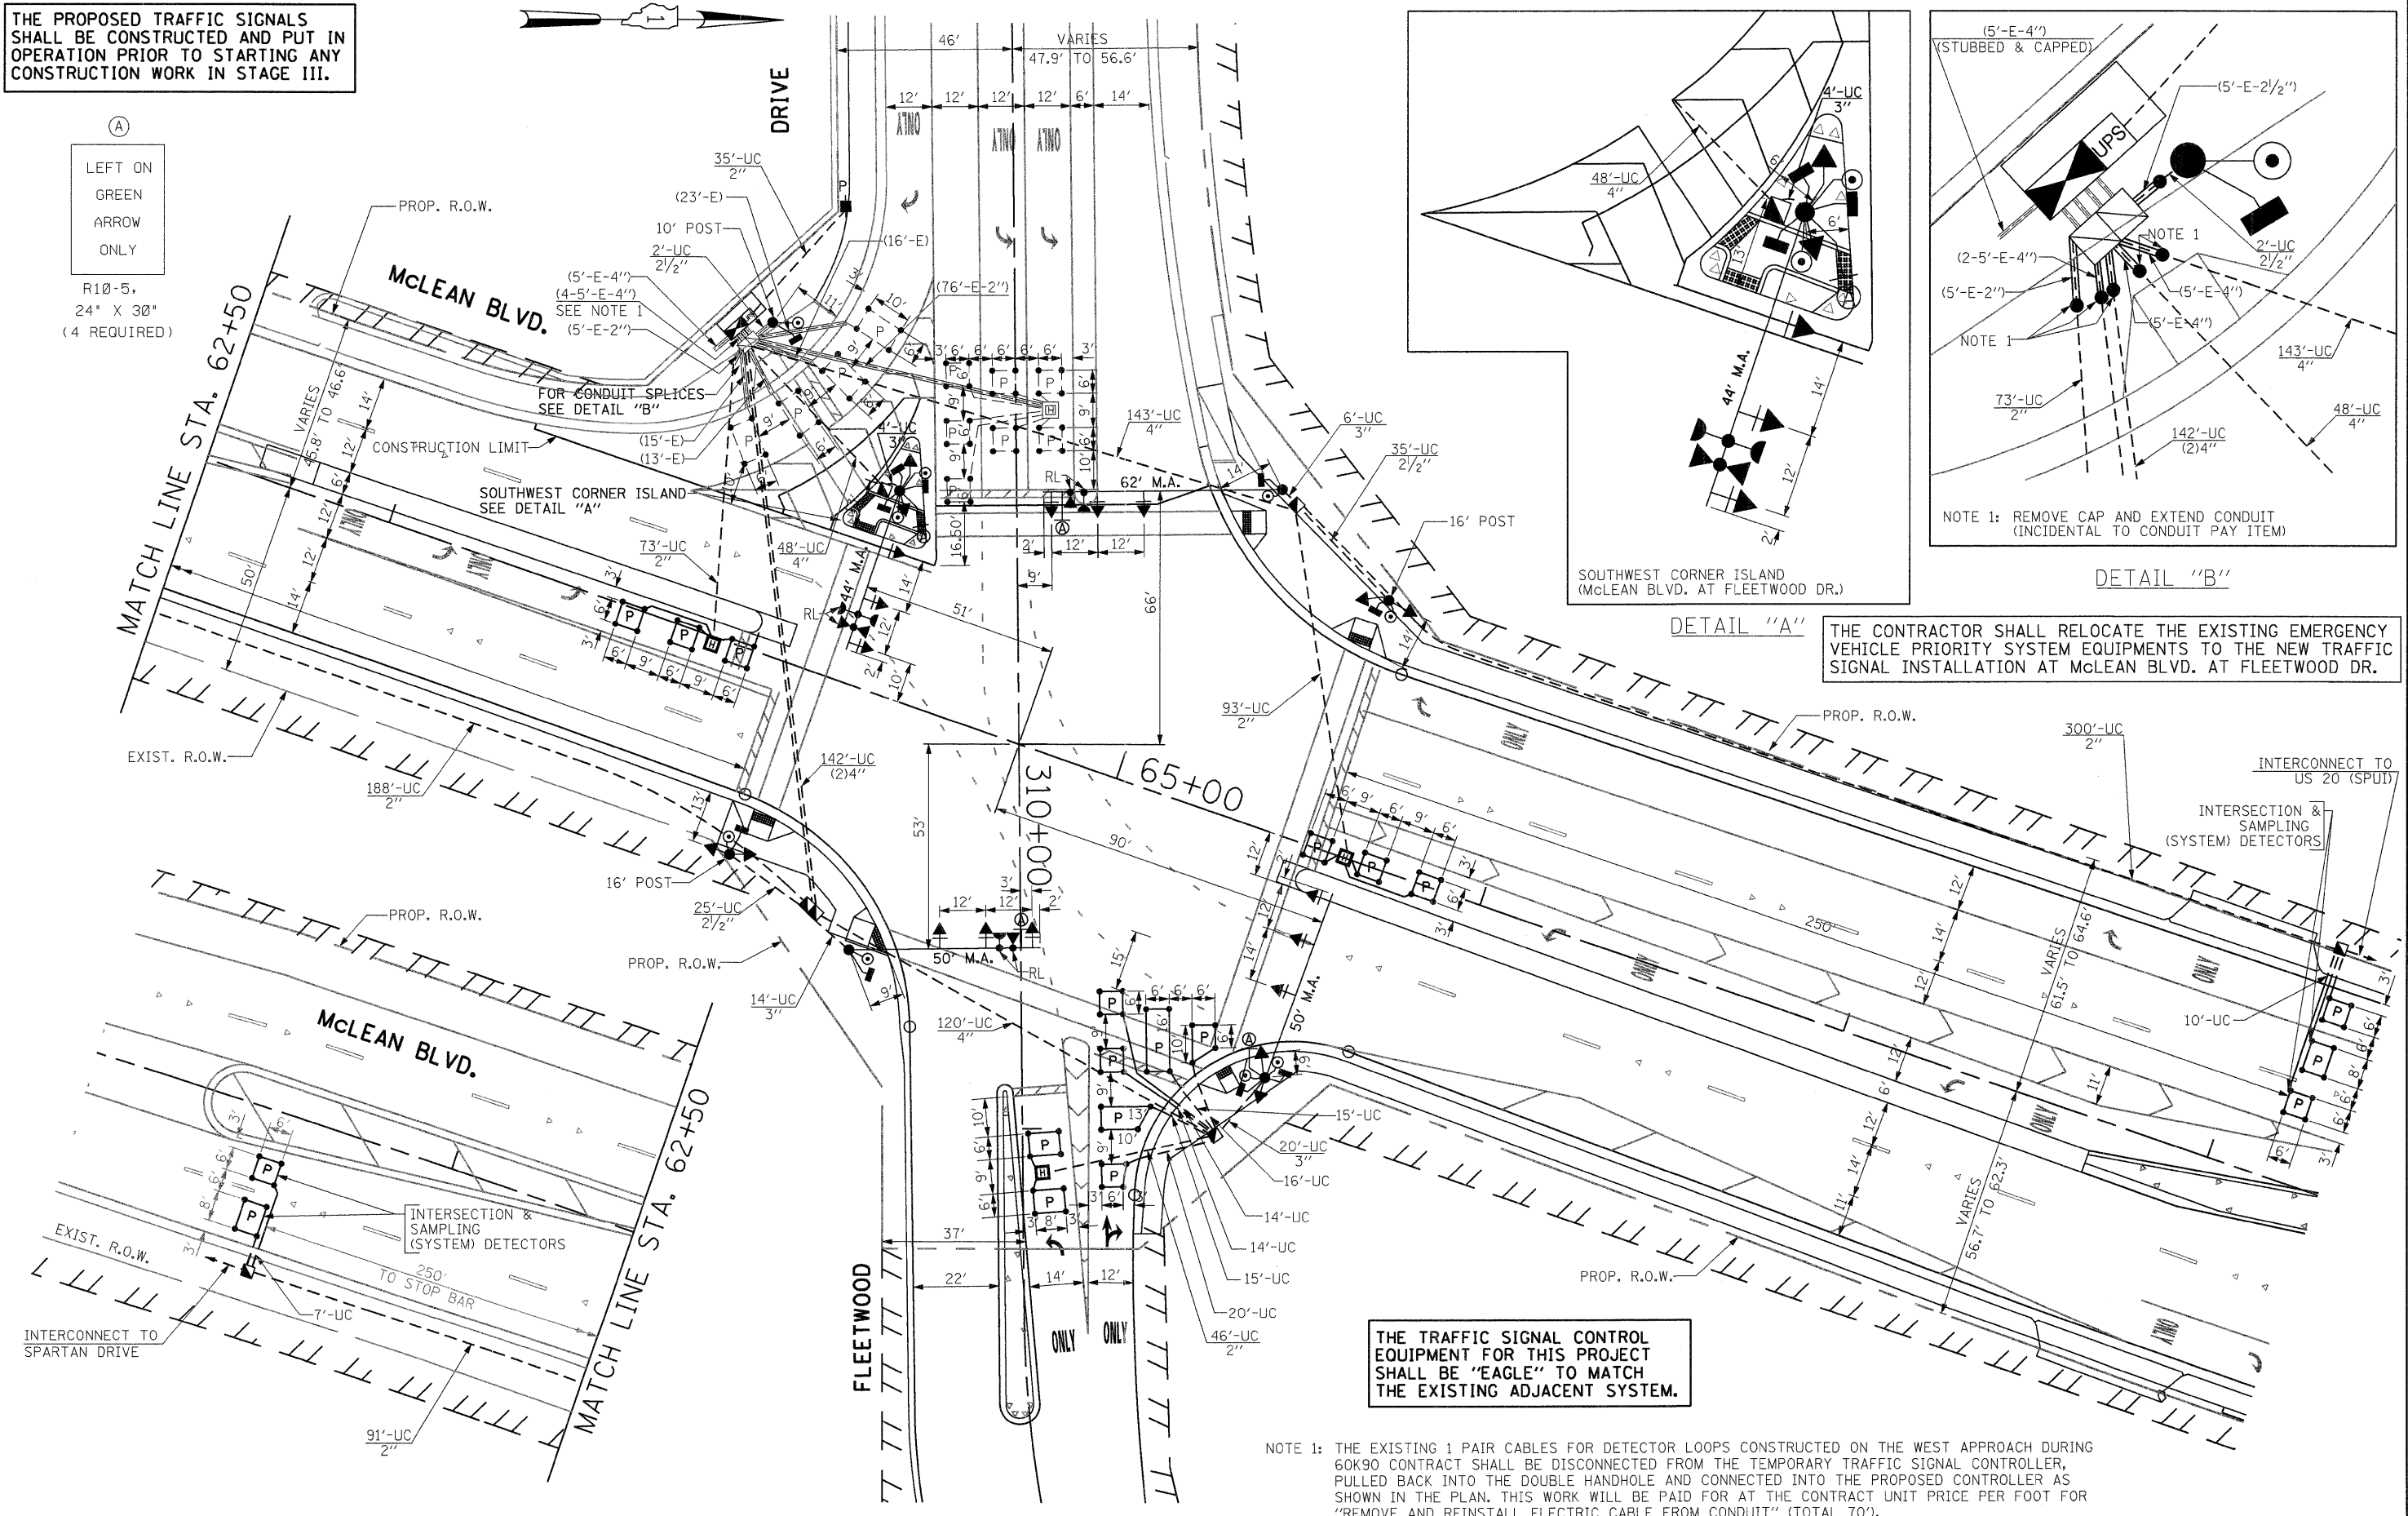

THE CONTRACTOR SHALL RELOCATE THE EXISTING EMERGENCY VEHICLE PRIORITY SYSTEM EQUIPMENTS TO THE NEW TRAFFIC SIGNAL INSTALLATION AT McLEAN BLVD. AT FLEETWOOD DR.

THE TRAFFIC SIGNAL CONTROL EQUIPMENT FOR THIS PROJECT SHALL BE "EAGLE" TO MATCH THE EXISTING ADJACENT SYSTEM.

NOTE 1: THE EXISTING 1 PAIR CABLES FOR DETECTOR LOOPS CONSTRUCTED ON THE WEST APPROACH DURING 60K90 CONTRACT SHALL BE DISCONNECTED FROM THE TEMPORARY TRAFFIC SIGNAL CONTROLLER, PULLED BACK INTO THE DOUBLE HANDHOLE AND CONNECTED INTO THE PROPOSED CONTROLLER AS SHOWN IN THE PLAN. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER FOOT FOR "REMOVE AND REINSTALL ELECTRIC CABLE FROM CONDUIT" (TOTAL 70').

FILE NAME = #FILE#	USER NAME = #USER#	DESIGNED - PKG	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TRAFFIC SIGNAL INSTALLATION PLAN McLEAN BOULEVARD AT FLEETWOOD DRIVE</b>			F.A.P. RTE. 345	SECTION 8R-R	COUNTY KANE	TOTAL SHEETS 794	SHEET NO. 403
	PLOT SCALE = #SCALE#	DRAWN - MAA, EA	REVISED -		SCALE: 1"=20'	SHEET NO. OF SHEETS	STA. TO STA.	FED. ROAD DIST. NO. - [ILLINOIS] FED. AID PROJECT				
	PLOT DATE = #DATE#	CHECKED - PKG	REVISED -					CONTRACT NO. 60H45				
		DATE - 02/10/2012	REVISED -									