


NOTES

1. FOR SYMBOL LIST AND ABBREVIATIONS, SEE SHEET LT-01.
2. ALL WIRING SHALL BE UNIT DUCT, 600V, 4-C NO.6, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
3. POLE SET BACK SHALL BE MEASURED FROM BACK OF THE CURB TO CENTER OF THE POLE/BASE.
4. BOILT CIRCLE AND ANCHOR BOLTS NUMBER AND LAYOUT OF THE FOUNDATION SHALL MATCH THE RE-INSTALLED POLE.

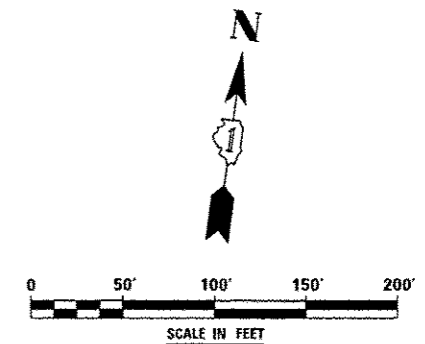

	DESIGNED <i>MCP</i>	REVISED - ADDENDUM A 02/20/2013	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LIGHTING PLAN - LIBERTY STREET	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	DRAWN <i>MLB</i>	REVISED -			338	(112 & 113) WRS-7	DUPAGE	1156	790	
	CHECKED <i>MCP</i>	REVISED -			LT-20		CONTRACT NO. 60R30			
	DATE <i>12/14/2012</i>	REVISED -			ILLINOIS FED. AID PROJECT					
			SCALE: AS SHOWN SHEET NO. 9 OF 15 SHEETS STA. TO STA.							