


NOTES

- FOR SYMBOL LIST AND ABBREVIATIONS, SEE SHEET LT-01.
- ALL WIRING SHALL BE UNIT DUCT, 600V, 4-1C NO.6, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
- POLE SET BACK SHALL BE MEASURED FROM BACK OF THE CURB TO CENTER OF THE POLE/BASE.
- ALL RELOCATED POLES SHALL BE WIRED FROM CITY OF NAPERVILLE CONTROLLER.
- BOLT CIRCLE AND ANCHOR BOLTS NUMBER AND LAYOUT OF THE FOUNDATION SHALL MATCH THE RE-INSTALLED POLE.

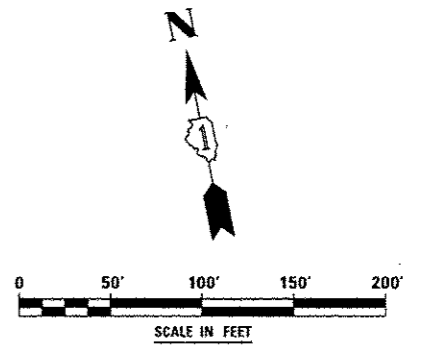

DESIGNED <i>MCP</i>	REVISED - ADDENDUM A 02/20/2013	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LIGHTING PLAN - NORTH AURORA ROAD		F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
DRAWN <i>MLB</i>	REVISED -		SCALE: AS SHOWN	SHEET NO. 14 OF 15 SHEETS	STA.	TO STA.	338	(112 & 113) WRS-7	DUPAGE	1156	795
CHECKED <i>MCP</i>	REVISED -		LT-25				CONTRACT NO. 60R30				
DATE 12/14/2012	REVISED -		<small>ILLINOIS FED. AID PROJECT</small>								