
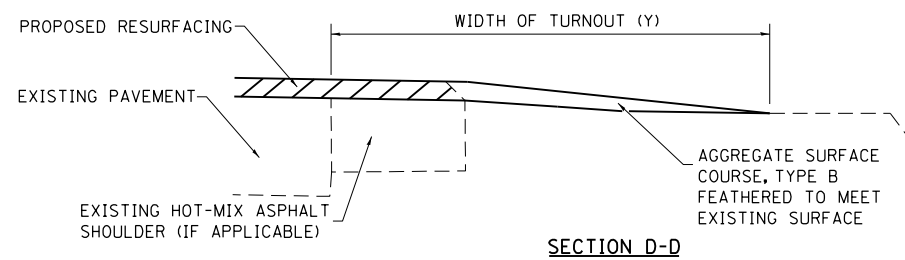
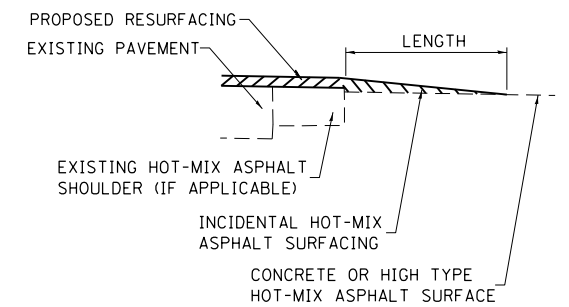


NOTE:  
ALL WORK ON ENTRANCES SHALL  
EXTEND TO R.O.W. LINE WHICH IS  
40' FROM C OF PAVEMENT

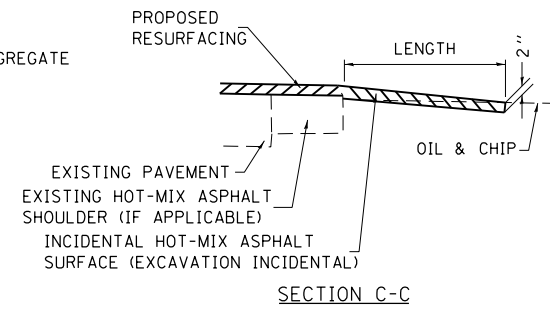

**TYPICAL SECTION AT MAILBOX TURNOUT**

NOTE: SEE STANDARD 406201 FOR MAILBOX TURNOUT DETAILS

**NOTES**

THE COST OF THE ASPHALT MATERIALS, AND AGGREGATE (PRIME COAT) FOR ENTRANCES AND PUBLIC ROADS AND APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

THE COST OF EXCAVATION IS INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

IF THERE IS NOT EXISTING HOT-MIX ASPHALT SHOULDER THEN THE ENTRANCE TAPER STARTS AT THE EDGE OF EXISTING PAVEMENT.

THE COST OF THE BITUMINOUS MATERIALS AND AGGREGATE (PRIME COAT) FOR ENTRANCES AND PUBLIC ROAD APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

SIDE	DISTANCE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
				TON	TON
RT		47+20	MBT		6
RT		49+32	MBT		6
LT	L1=15'	49+39	PE	9.1	
LT	L2=15'	49+39	PE	6.4	
RT	L1=15'	51+89	PE	8.1	
RT	L2=15'	51+89	PE	5.6	
RT		52+44	MBT		6
LT	L=30'	52+98	PRA	31.3	
LT	L=30'	56+26	FE		18.6
RT	L=30'	56+76	FE		23.9
RT	L=26'	64+65	CE		15
LT	L1=15'	69+23	FE		9
LT	L2=15'	69+23	FE		6.6
LT		70+50	MBT		6
LT	L1=15'	70+80	PE	8	
LT	L2=15'	70+80	PE	4.9	
RT	L=30'	73+50	PRA	22.1	
RT	L=26'	78+68	PE		16.1

SIDE	DISTANCE	STATION	TYPE	INCIDENTAL HOT-MIX ASPHALT SURFACING	AGGREGATE SURFACE COURSE, TYPE B
				TON	TON
RT		79+02	MBT		6
LT	L1=15'	79+67	CE	13.1	
LT	L2=15'	79+67	CE	10.8	
RT	L=26'	80+57	PE		11.5
LT	L1=15'	83+78	PE	7.7	
LT	L2=15'	83+78	PE	5.1	
LT		84+05	MBT		6
RT		86+44	MBT		6
LT	L=30'	86+44	PRA	32.1	
RT	L1=10'	86+72	PE	3	
RT	L2=20'	86+72	PE	4.1	
			TOTALS =	327	321

FE=FIELD ENTRANCE  
PE=PRIVATE ENTRANCE  
CE=COMMERCIAL ENTRANCE  
PRA - PUBLIC ROAD APPROACH  
MBT - MAILBOX TURNOUT

FILE NAME =	USER NAME = steffenmk	DESIGNED - 08-03-99	REVISED - 03-13-07
ei:\pw\work\p1dot\steffenmk\d0283756\074465-sht-details.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / 1in.	CHECKED -	REVISED -
	PLOT DATE = 1/17/2012	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**RURAL ENTRANCE SCHEDULE AND MAILBOX TURNOUT DETAILS  
WITH SHOULDERS**

SCALE: NA SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
7623	(39MFT)RS-1	COLES	31	13
CONTRACT NO. 74465				
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		