


TO BE USED

RAMPS - A & G

RAMP A: STA. 41+21.02 TO STA. 43+25.07
 RAMP G: STA. 114+39.94 TO STA. 116+44.46

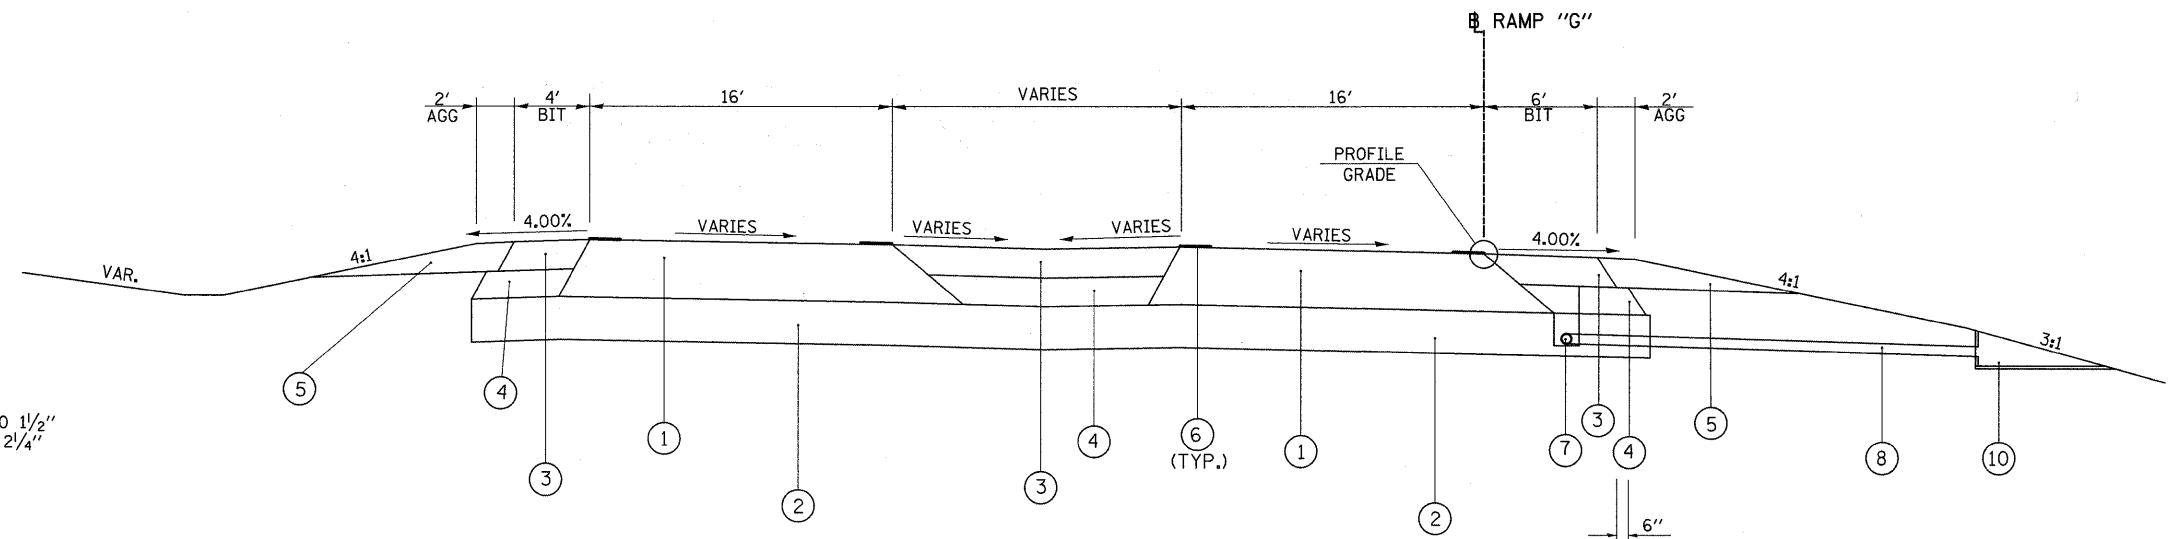

TO BE USED

RAMP - G

RAMP G: STA. 116+44.46 TO STA. 118+60.80

- ① HOT-MIX ASPHALT PAVEMENT (FULL DEPTH), 14 3/4"
 -POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N90 1 1/2"
 -POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N105 2 1/4"
 -HOT-MIX ASPHALT BINDER COURSE, N90, 11"
- ② PROCESSING LIME MODIFIED SOILS 12"
- ③ HOT-MIX ASPHALT SHOULDERS, 8"
- ④ SUB-BASE GRANULAR MATERIAL, TYPE C
- ⑤ AGGREGATE SHOULDERS, TYPE A, 8"
- ⑥ THERMOPLASTIC PAVEMENT MARKING - LINE 4"
- ⑦ PIPE UNDERDRAINS 4"
- ⑧ PIPE UNDERDRAINS 4" (SPECIAL)
- ⑨ CONCRETE BARRIER, DOUBLE FACE, 42 INCH HEIGHT (SEE STANDARD 637006)
- ⑩ CONCRETE HEADWALL FOR PIPE DRAINS (SEE PLANS FOR LOCATIONS)

FILE NAME =	USER NAME = *USER*	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	RAMPS TYPICAL SECTIONS			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
FILEL		DRAWN -	REVISED -		SCALE: N.T.S.	SHEET NO. 13 OF 14 SHEETS	STA.	TO STA.	*	(X1-6-2)K-1(1X-1)R-4	WILLIAMSON	194	25
		PLOT SCALE = *SCALE*	REVISIED -						* I-57/IL 13 (FAI 57/FAP 331)				
		PLOT DATE = *DATE*	REVISIED -										

[ILLINOIS] FED. AID PROJECT