



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
398	36R-1, (3TR-2)	TAZEWELL	449	248
STA.		TO STA.		
FED. ROAD DIST. NO. 4		ILLINOIS	FED. AID PROJECT	

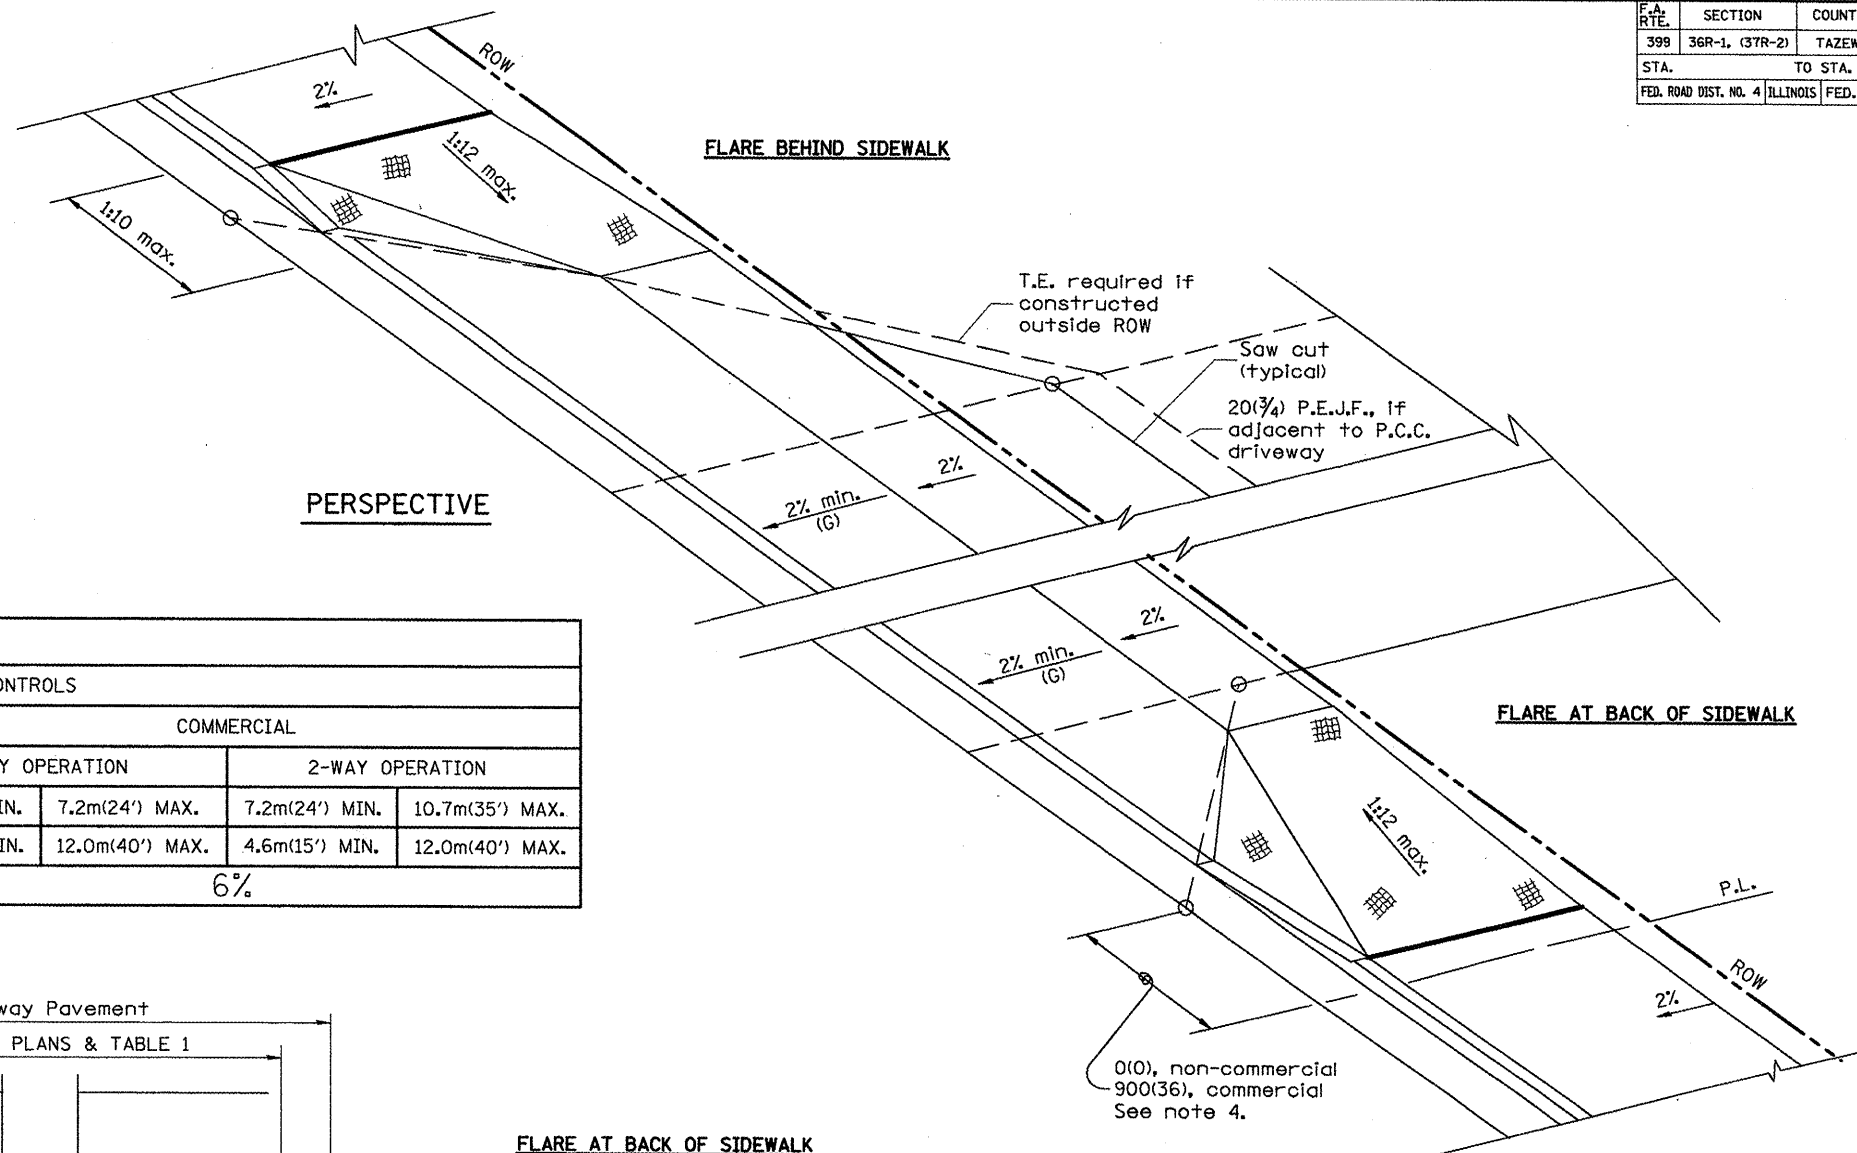

ELEMENT	NON-COMMERCIAL		COMMERCIAL			
			1-WAY OPERATION		2-WAY OPERATION	
WIDTH (W)	3.6m(12') MIN.	7.2m(24') MAX.	4.3m(14') MIN.	7.2m(24') MAX.	7.2m(24') MIN.	10.7m(35') MAX.
RADIUS EQUIVALENT 1:1 FLARE (F)	1.5m(5') MIN.	7.6m(25') MAX.	4.6m(15') MIN.	12.0m(40') MAX.	4.6m(15') MIN.	12.0m(40') MAX.
MAX. GRADE (G)	8%		6%			

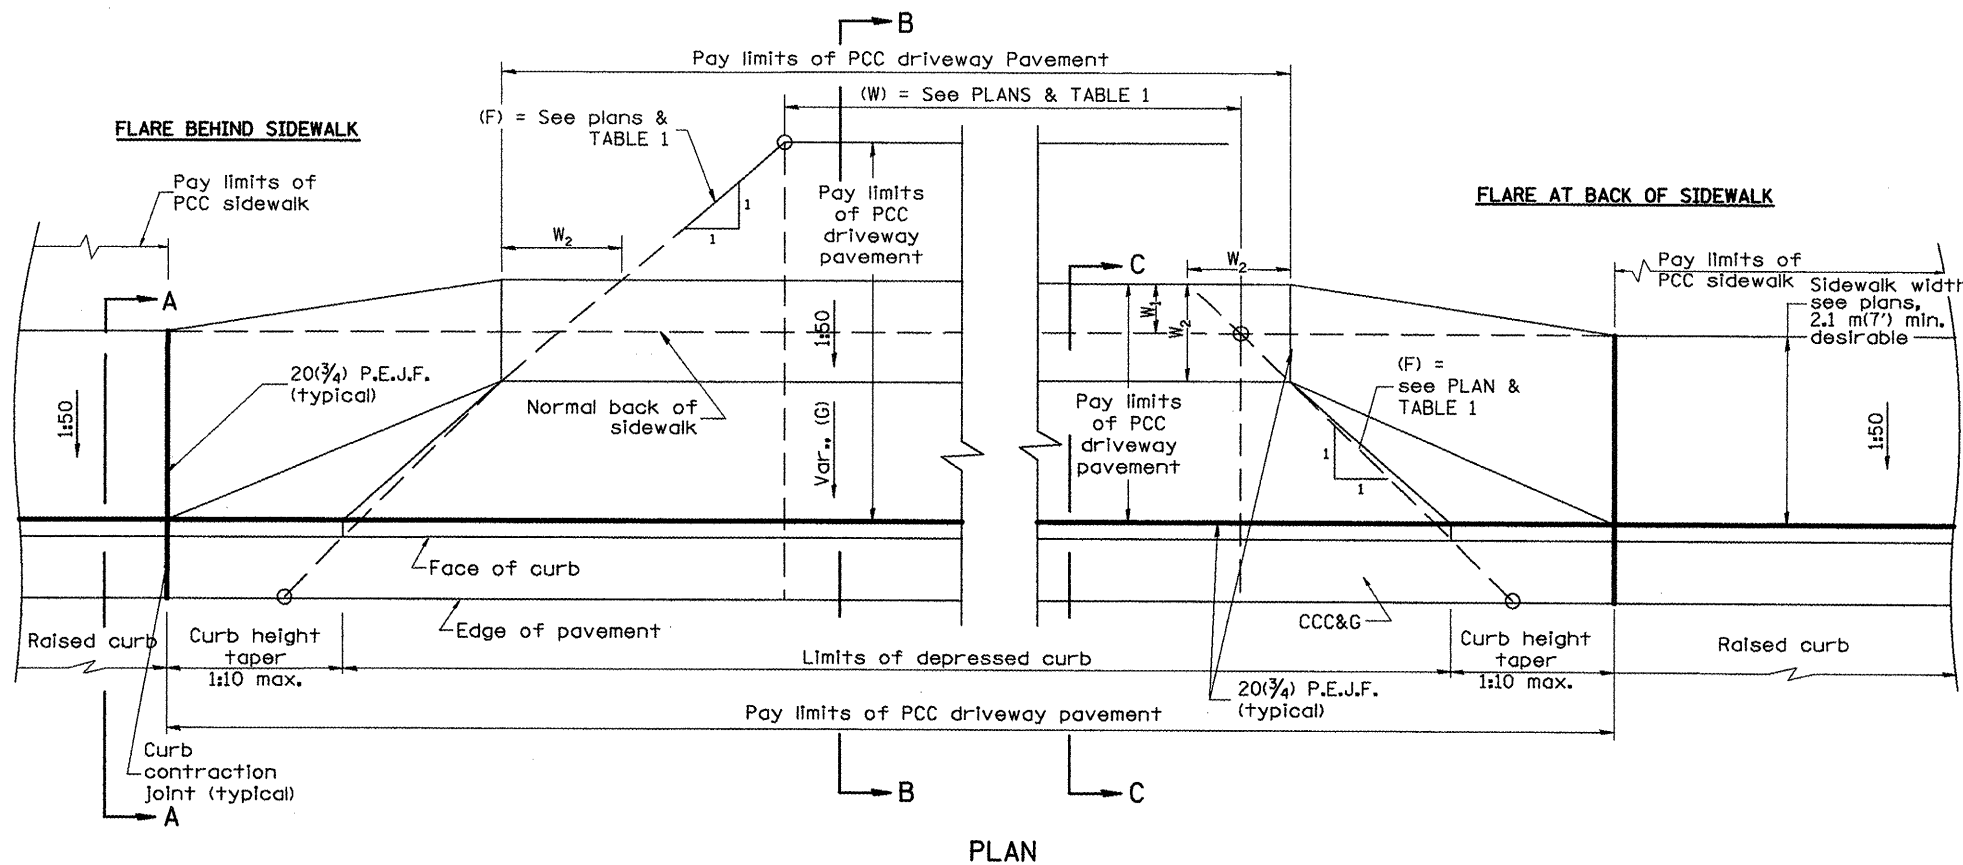

PLAN
 W_1 = widening behind normal sidewalk (See plans)
 W_2 = sidewalk slope at 1:50; minimum width = 900(36)

GENERAL NOTES

1. Refer to State Standard 424001 for texturing and other disabled accessibility design elements.
2. The sidewalk area located within the pay limits of P.C.C. Driveway Pavement will be of the same thickness and construction as the P.C.C. Driveway Pavement.
3. Combination Concrete Curb & Gutter shall be depressed in accordance with Standard 606001.
4. Exceptions to the radius flare/property line relationship are as shown in the plans for common entrances, with jointly executed access permits.

All dimensions are in millimeters (inches) unless otherwise noted.

ILLINOIS DEPARTMENT OF TRANSPORTATION			
DISTRICT CADD STANDARD			
URBAN ENTRANCES ACCESSIBLE TO THE DISABLED SPECIAL DESIGN FOR CURBLINE SIDEWALKS			
CADD STD NO. 423111-D4		SHEET 1 OF 2	
SCALE: NOT DRAWN TO SCALE		DRAWN BY: CADD	
DATE: **DATE**		CHECKED BY: T. PICKERING	

DATE	REVISIONS	BY
1-1-97	RENUM. C-103.03, NEW REVISION BOX	T.P.
9-15-05	REVISED DESIGNER NOTE	M.M.A.

1:1 FLARES ARE RECOMMENDED FOR CURBLINE SIDEWALKS.
 2: DESIGNER SHOULD REVIEW CHAPTER 58 OF BDE FOR THE ADA REQUIREMENTS.
 3: INCLUDE STATE STANDARD 424001 AND 606001.
 DATE