


- LEGEND**
- E100 EXISTING STORM STRUCTURE
 - S100 STORM STRUCTURE
 - P100 STORM SEWER


- LEGEND - DRIVEWAYS**
- PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6"
 - PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8"
 - INCIDENTAL HOT-MIX ASPHALT SURFACING
 - AGGREGATE SURFACE COURSE, TYPE A
 - DETECTABLE WARNING
 - CLASS D PATCHES, TYPE IV

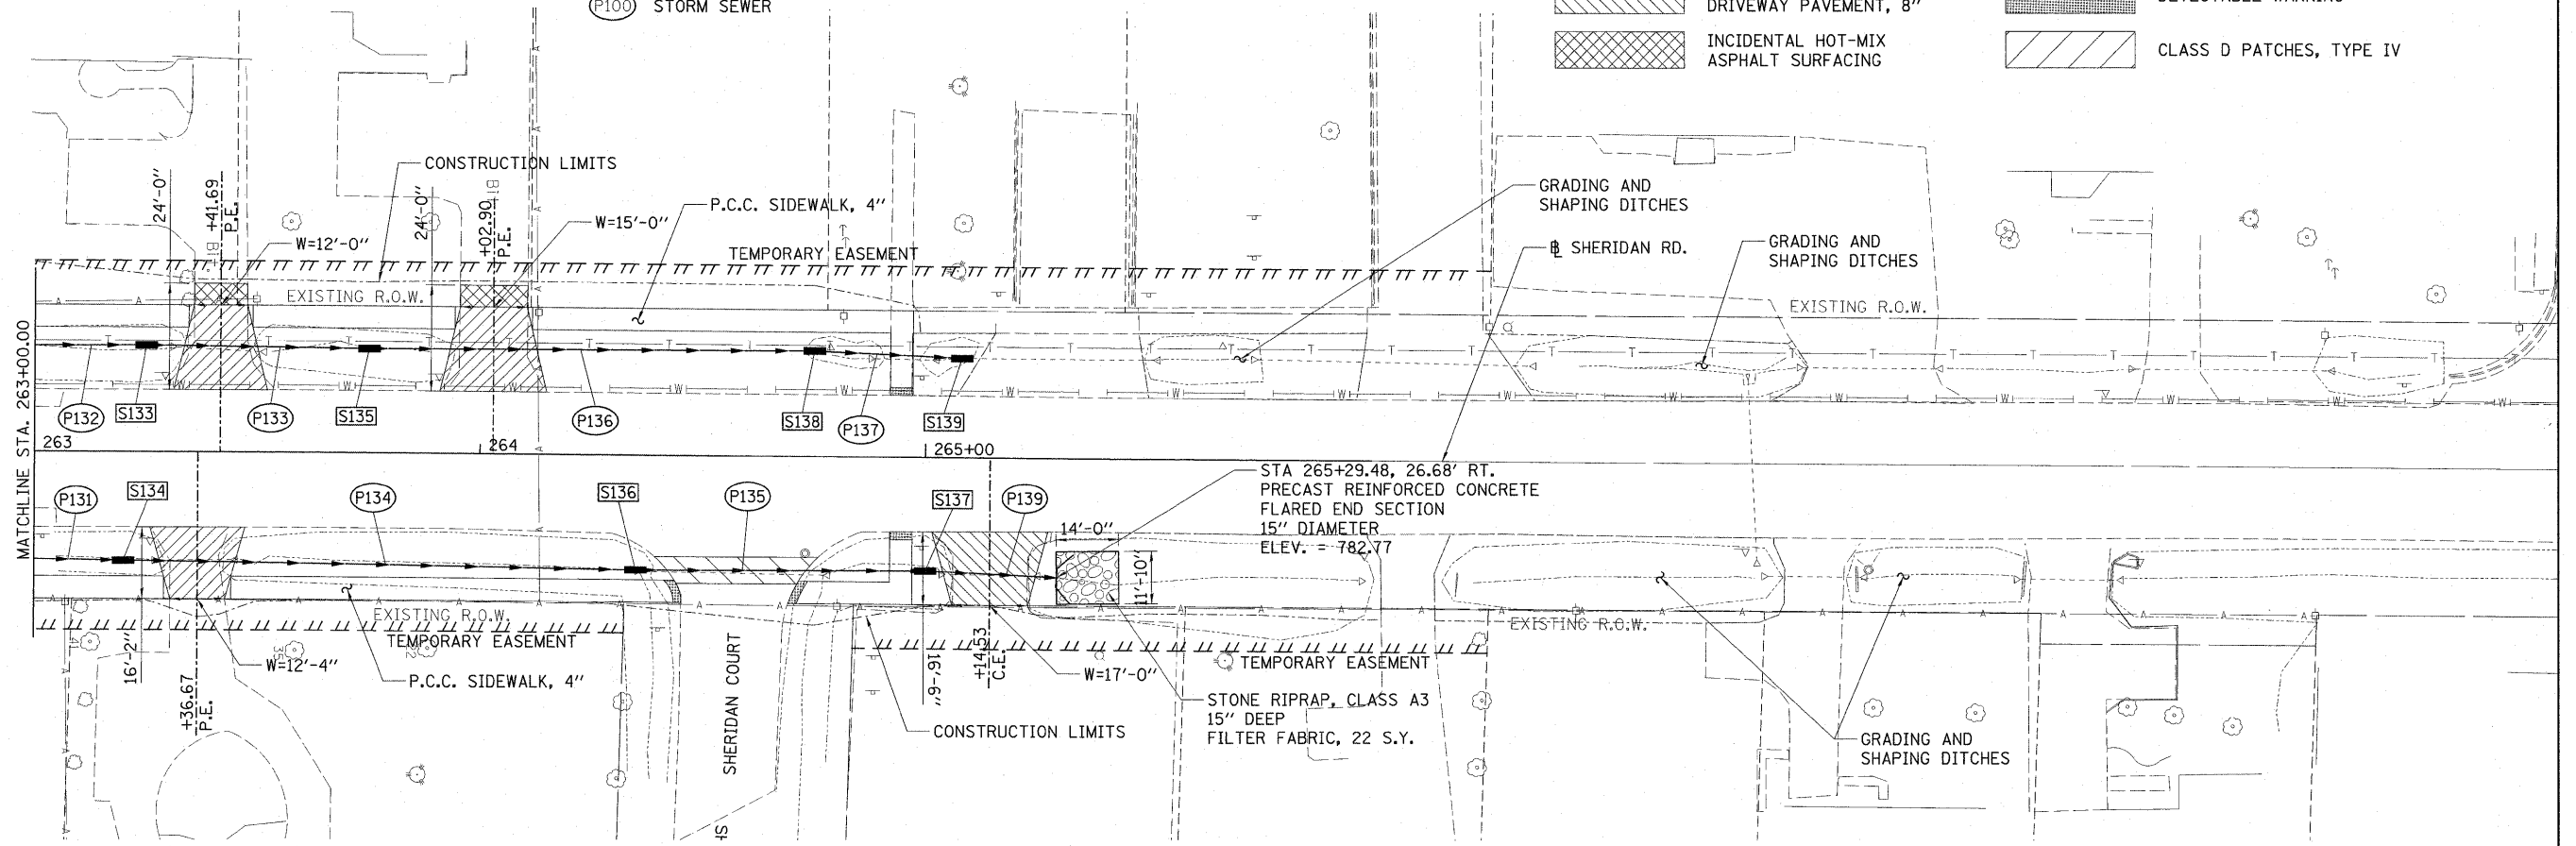

STRUCTURE NUMBER	STATION	OFFSET	TYPE	RIM ELEVATION	INVERT ELEVATIONS			
					N	S	E	W
S133	263+25.00	23.96	LT. INLETS, TYPE G-1*	787.74	785.84	785.84		
S134	263+20.00	24.41	RT. INLETS, TYPE G-1*	787.40	785.05	785.05		
S135	263+75.00	23.42	LT. INLETS, TYPE G-1*	787.36	785.46	785.46		
S136	264+35.00	25.76	RT. INLETS, TYPE G-1*	786.00	783.85	783.85		
S137	265+00.00	25.40	RT. INLETS, TYPE G-1*	785.23	783.08	783.08		
S138	264+75.00	23.81	LT. INLETS, TYPE G-1*	786.60	784.72	784.72		
S139	265+08.00	22.41	LT. CATCH BASINS, TYPE B	786.00	784.50	784.50		

PIPE NUMBER	FROM STRUCTURE	U/S INVERT	TO STRUCTURE	D/S INVERT	CLASS/TYPE	DIAMETER	LENGTH	SLOPE	TRENCH BACKFILL
P132	S132	787.49	S133	785.84	STORM SEWERS, (WATER MAIN REQUIREMENTS) TYPE 2	12	72.0	2.29%	2.6
P133	S133	785.84	S135	785.46	STORM SEWERS, (WATER MAIN REQUIREMENTS) TYPE 2	12	47.0	0.81%	2.7
P134	S134	785.05	S136	783.85	STORM SEWERS, CLASS A, TYPE 1	15	112.0	1.07%	3.1
P135	S136	783.85	S137	783.08	STORM SEWERS, CLASS A, TYPE 1	15	62.0	1.24%	8.9
P136	S135	785.46	S138	784.72	STORM SEWERS, (WATER MAIN REQUIREMENTS) TYPE 2	12	97.0	0.78%	3.1
P137	S138	784.72	S139	784.50	STORM SEWERS, (WATER MAIN REQUIREMENTS) TYPE 2	12	28.5	0.77%	2.2
P139	S137	783.08	OUTLET	782.77	STORM SEWERS, CLASS A, TYPE 1	15	28.0	1.11%	3.7

* SEE SPECIAL PROVISIONS FOR FRAME AND GRATE TYPE TYPE FOR S133, S134, S135, S136, S137 AND S138.

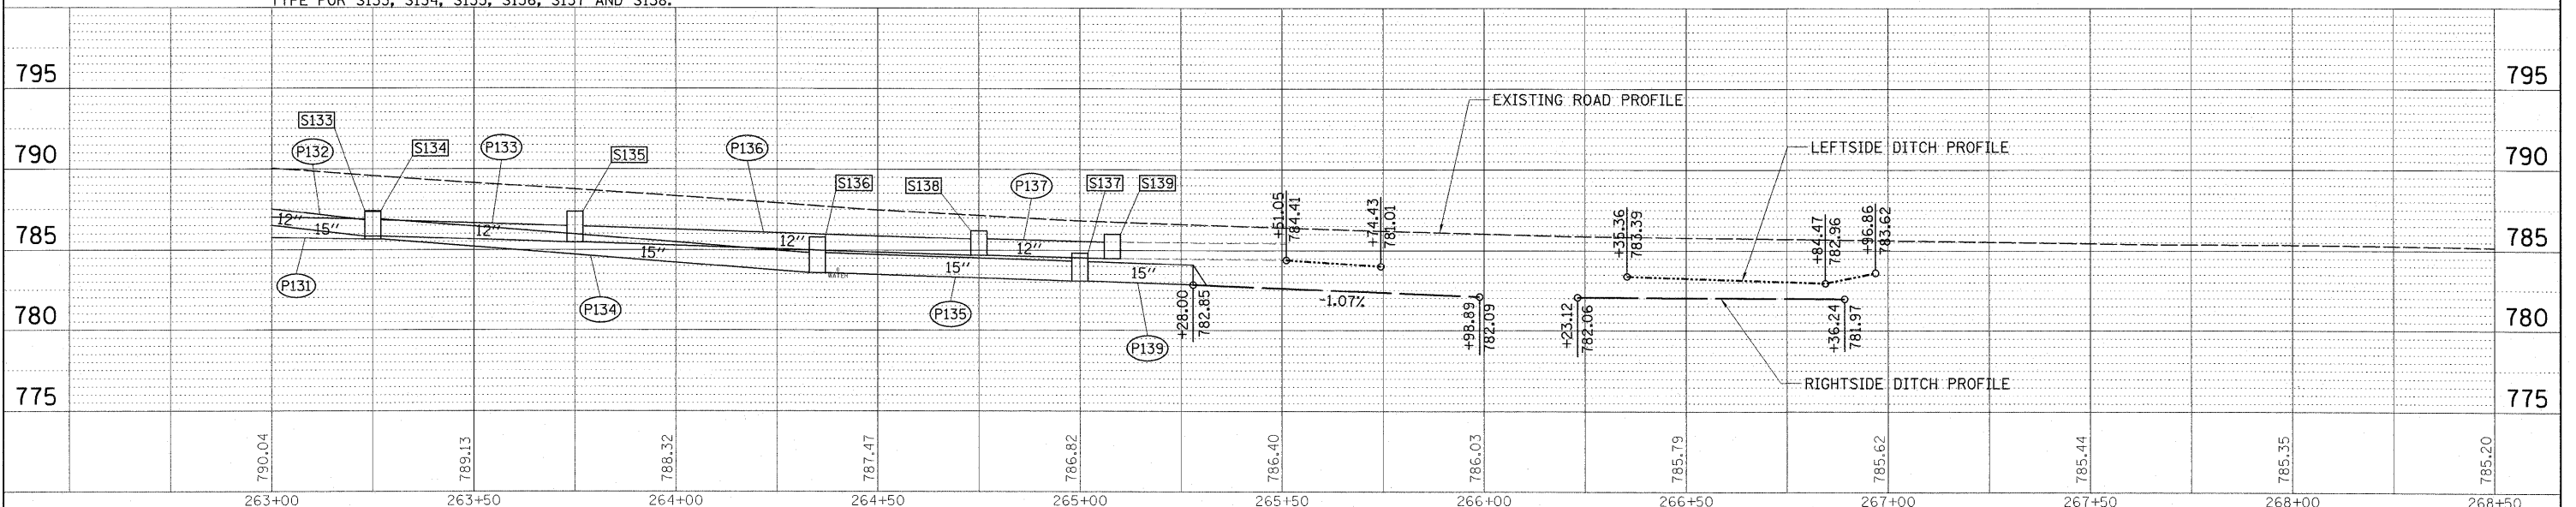

SURVEYED BY: _____
 ALIGNED BY: _____
 CHECKED BY: _____
 DATE: _____

© Copyright Hanson Professional Services Inc. 2010
HANSON
 Hanson Professional Services Inc.

PROFILE SURVEYED BY: _____
 GRADES CHECKED BY: _____
 DATE: _____