



04-27-2018 LETTING ITEM 077

FOR INDEX OF SHEETS & STATE STANDARDS
SEE SHEET NO. 2

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PROPOSED
HIGHWAY PLANS
VARIOUS ROUTES
SECTION D 2 ITS 2018
VARIOUS COUNTIES
C-92-046-18

RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D-2 ITS 2018	VARIOUS	4	1

CONTRACT NO. 64M89
D-92-034-18

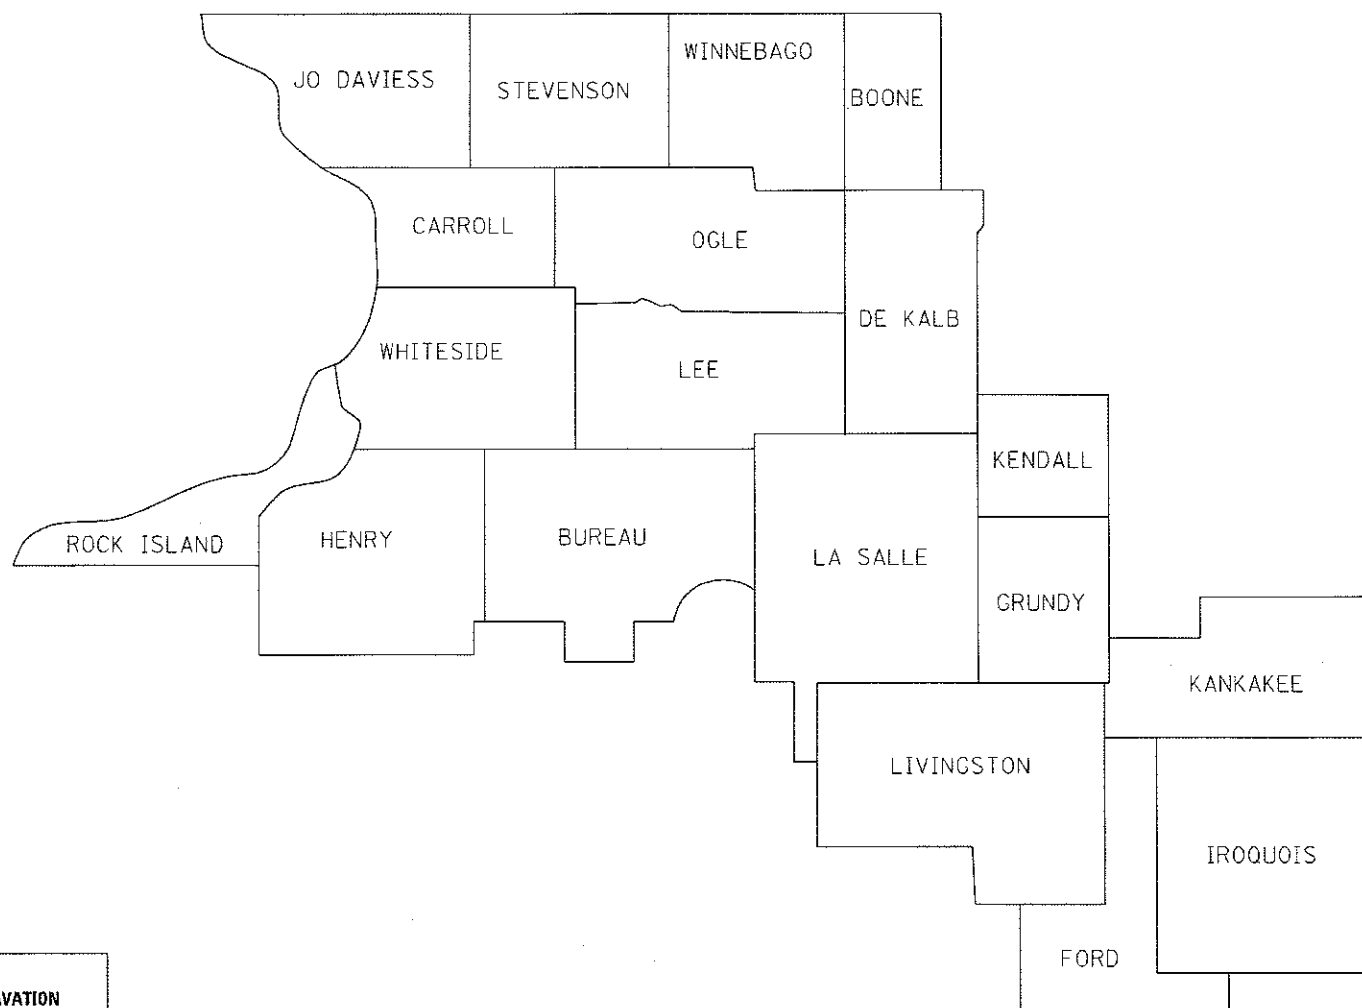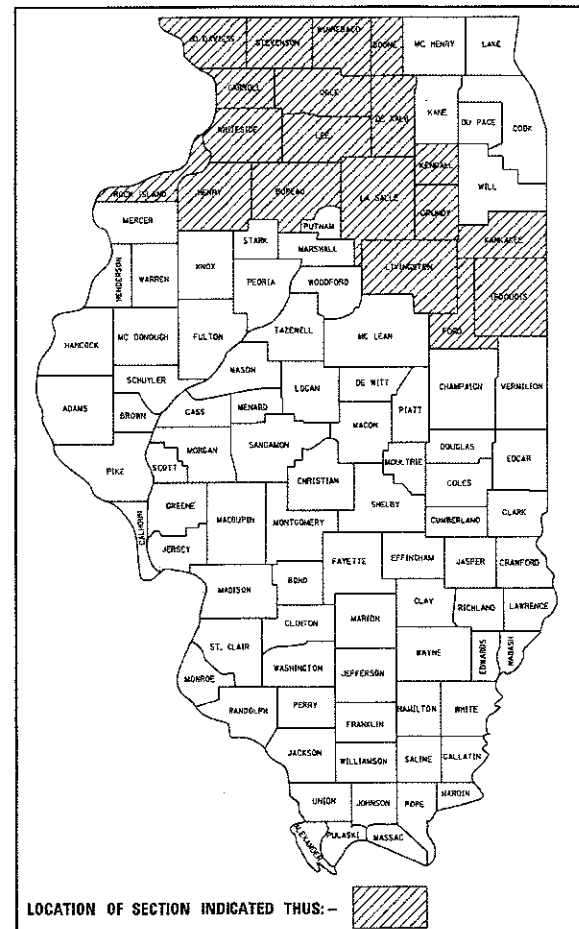

PROJECT ENGINEER: SCOTT KULLERSTRAND (815) 284-5468

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 64M89

VARIOUS ROUTES

SECTION D-2 ITS 2018

VARIOUS COUNTIES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED 1-12 2018
K. D. Marubak
 DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

Mar 23 2018
Scott Kullerstrand
 ENGINEER OF DESIGN AND ENVIRONMENT

Mar 23 2018
Paul P. [Signature]
 DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

- 1 COVER SHEET
- 2 INDEX OF SHEETS & STATE STANDARDS
- 3 SUMMARY OF QUANTITIES
- 4 GENERAL NOTES

STATE STANDARDS

- 701001-02 OFF-ROAD OPERATIONS,2L,2W, MORE THAN 15' AWAY
- 701006-05 OFF-ROAD OPERATIONS,2L,2W, 15'(4.5M) TO 24"(600M) FROM PAVEMENT EDGE
- 701101-05 OFF-ROAD OPERATIONS,MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
- 701106-02 OFF-ROAD OPERATIONS,MULTILANE, MORE THAN 15' AWAY
- 701201-04 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45MPH
- 701206-04 LANE CLOSURE, 2L, 2W, NIGHT ONLY, FOR SPEEDS > 45 MPH
- 701301-04 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701311-03 LANE CLOSURE, 2L, 2W, MOVING OPREATIONS, DAY ONLY
- 701400-09 APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701406-11 LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
- 701411-09 LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP FOR SPEEDS > 45 MPH OR MORE
- 701421-08 LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY FOR SPEEDS 45 TO 55 MPH
- 701426-09 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS, FOR SPEEDS > 45 MPH
- 701427-05 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS, FOR SPEEDS < 40 MPH
- 701428-01 TRAFFIC CONTROL SETUP AND REMOVAL FREEWAY/EXPRESSWAY
- 701456-05 PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
- 701501-06 URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
- 701601-09 URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
- 701606-10 URBAN LANE CLOSURE, MULTILANE 2W WITH MOUNTABLE MEDIAN
- 701701-10 URBAN LANE CLOSURE, MULTILANE INTERSECTION
- 701801-06 LANE CLOSURE, MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
- 701901-07 TRAFFIC CONTROL DEVICES
- 701401-11 LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701422-10 LANE CLOSURE, MULTILANE, FOR SPEEDS 45MPH TO 55 MPH
- 701502-08 URBAN LANE CLOSURE, 2L, 2W, WITH BIDIRECTIONAL LEFT TURN LANE

FILE NAME : C:\Users\ditzlerse\Desktop\covr.dgn	USER NAME : ditzlerse	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	D2 ITS 2018 SUMMARY OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHE NO	
		DRAWN -	REVISED -		SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.	VAR.	02 ITS 2018	VARIOUS	4 2
		CHECKED -	REVISED -		CONTRACT NO. 64MB									
		DATE -	REVISED -		[ILLINOIS] FED. AID PROJECT									

SUMMARY OF QUANTITIES

CODE NUMBER	ITEM	UNITS	100% STATE 0021 TOTAL QUANTITY
XP000001	JOURNEYMAN ELECTRICIAN	HOUR	250
XP000002	APPRENTICE ELECTRICIAN	HOUR	250
XP000009	PICK-UP TRUCK	HOUR	250
XP000010	BUCKET TRUCK (LENGTH LESS THAN 35 FEET)	HOUR	250
XP000011	BUCKET TRUCK (LENGTH 35 TO 65 FEET)	HOUR	250
XP000021	CELLULAR ACCOUNTS	CAL MO	450.0

* SPECIALTY ITEMS

FILE NAME = C:\Users\ditzlerse\Desktop\covr.dgn	USER NAME = ditzlerse	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	D2 ITS 2018 SUMMARY OF QUANTITIES	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEE NO.
		DRAWN -	REVISED -			VAR.	D2 ITS 2018	VARIOUS	4	3
		CHECKED -	REVISED -		SCALE:					
		DATE -	REVISED -		SHEET NO.	OF	SHEETS	STA.	TO STA.	
										CONTRACT NO. 64MB9
										ILLINOIS FED. AID PROJECT

GENERAL NOTES

This work is located on various routes located throughout the 19 counties of Region 2 IDOT, (Districts 2 and 3). The work included in this section consists of repairing, replacing, maintaining, and servicing all of the DEPARTMENT'S Intelligent Transportation Equipment located in Region Two (Districts Two and Three) at the locations described by work orders issued from the Illinois Department of Transportation for a period of July 1, 2018 to June 30, 2020.

The locations of the repair areas shall be determined by the engineer.

All work is to be replaced in kind or, as indicated in the work order and special provisions.

Removal of damaged materials will include dismantling, loading, hauling, and disposal.

Any necessary traffic control will be provided by the contractor; appropriate standards are listed on Sheet No. 2. Traffic control shall not be paid for as separate pay items, but shall be considered a part of the contract.

The work site shall be left in a safe and orderly condition.

No material should be left on or near the roadway.

All excavated material, which includes digging or grading of any soil or fill material, with the exception of aggregate fills, must be left on, or incorporated within, the IDOT right-of-way due to environmental documentation requirements.

Any work order may be cancelled at the engineer's discretion.

Electronic files and/or electronic survey information including CADD files will not be available for this project to the contractor.

No overnight lane closures will be allowed, unless emergency conditions exist.

The contractor is advised that there may be presence of department-owned underground electrical cable within the limits of the proposed improvement. The contractor may be responsible to locate these underground facilities; this work would be included in the work order and shall be paid for as part of the work order. The department is not a member of the Joint Utility Locating Information for Excavators (JULIE) system.

All damage to department owned underground facilities, caused by the contractor shall be repaired to the satisfaction of the department at the contractor's expense. This shall include all temporary repairs required to keep the facility operational while material is being obtained to make permanent repairs. Splicing of electrical cable shall not be allowed. Electric cable shall be replaced from pole to pole or controller.

The contractor shall be responsible for protecting utility property from construction operations as outlined in Article 107.31 of the Standard Specifications, the J.U.L.I.E. number is 1-800-892-0123. A minimum of 48 hours advance notice is required.

FILE NAME = DOCUMENT1	DESIGNED - Engineering Systems	REVISED -	STATE OF ILLINOIS		
USER NAME =	DRAWN -	REVISED -	DEPARTMENT OF TRANSPORTATION		
PLOT SCALE =	CHECKED -	REVISED -	GENERAL NOTES	SCALE:	
PLOT DATE	DATE - 1/20/19 9:40 PM	REVISED -	OF SHEETS	SHEET NO. OF SHEETS	TO STA.
			STA.		
			VARIOUS	SECTION	COUNTY
			4	DDJTS/2018	Various
			4		CONTRACT NO.
			4		64M9
			4	ILLINOIS	FED. AID PROJECT