


CONCRETE GUTTER, TYPE A (MODIFIED)

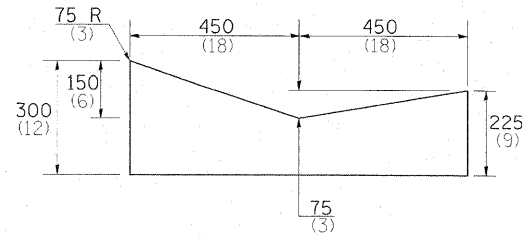

NOTES:


THIS WORK SHALL BE DONE IN ACCORDANCE WITH THIS DETAIL AND STANDARD 606101 THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER METER (FOOT) FOR CONCRETE GUTTER, TYPE A (MODIFIED).

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 5-4-94

CONCRETE GUTTER, TYPE A (MODIFIED) 36.4

DELINEATOR AND POST ORIENTATION

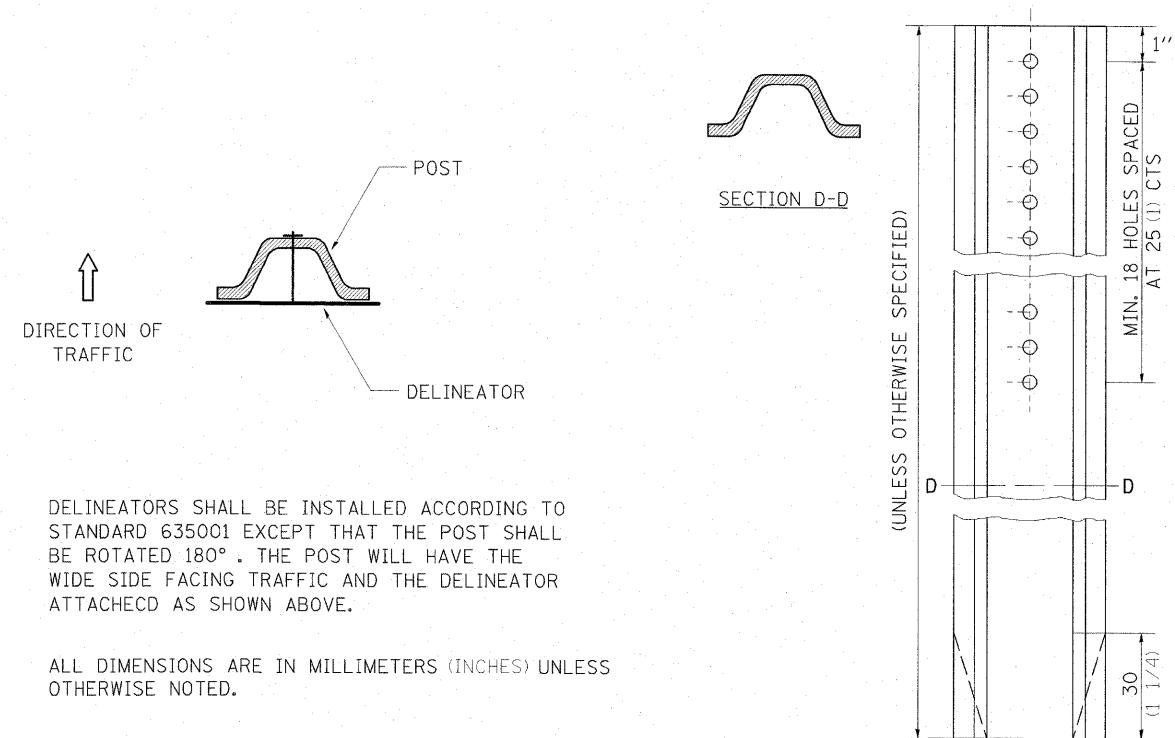



DELINEATORS SHALL BE INSTALLED ACCORDING TO STANDARD 635001 EXCEPT THAT THE POST SHALL BE ROTATED 180°. THE POST WILL HAVE THE WIDE SIDE FACING TRAFFIC AND THE DELINEATOR ATTACHED AS SHOWN ABOVE.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 11-01-07

DELINEATOR AND POST ORIENTATION 37.4

ROAD CLOSED TO OVERSIZED LOADS

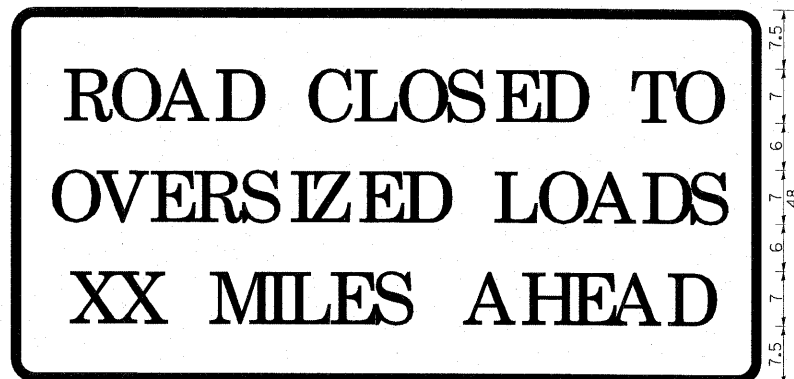

Permit Loads - Loads Over 13 Feet; 3.0" Radius, 1.3" Border, Black on Orange; [ROAD CLOSED TO] D; [OVERSIZED LOADS] D; [XX MILES AHEAD] D; Table of letter and object lefts.

R	O	A	D	C	L	O	S	E	D	T	O
6.5	12.5	18.7	25.9	37.0	43.6	49.2	55.4	61.8	67.3	79.0	84.6
O	V	R	S	I	Z	E	D	L	O	A	D
4.8	11.0	17.6	23.1	29.2	35.8	38.2	44.3	49.8	51.5	57.1	73.3
X	X	M	I	L	E	S	A	H	E	A	D
7.6	13.6	25.3	32.3	35.1	40.8	46.2	57.9	65.1	71.4	76.6	83.7


All work to furnish and install these signs shall be included in the cost of the Traffic Control Standards and shall not be paid for separately.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REVISED - 1-9-08

ROAD CLOSED TO OVERSIZED LOADS 40.4

TYPICAL BENCHING ON EXISTING EMBANKMENT

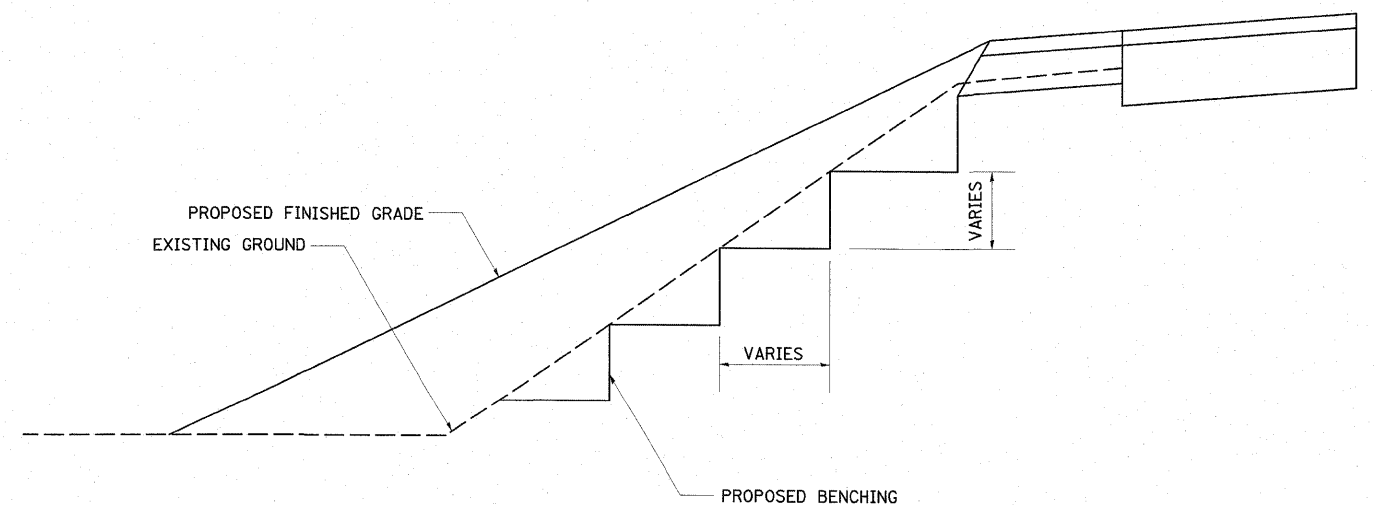

REVISED - 2-22-06

TYPICAL BENCHING ON EXISTING EMBANKMENT 50.4