
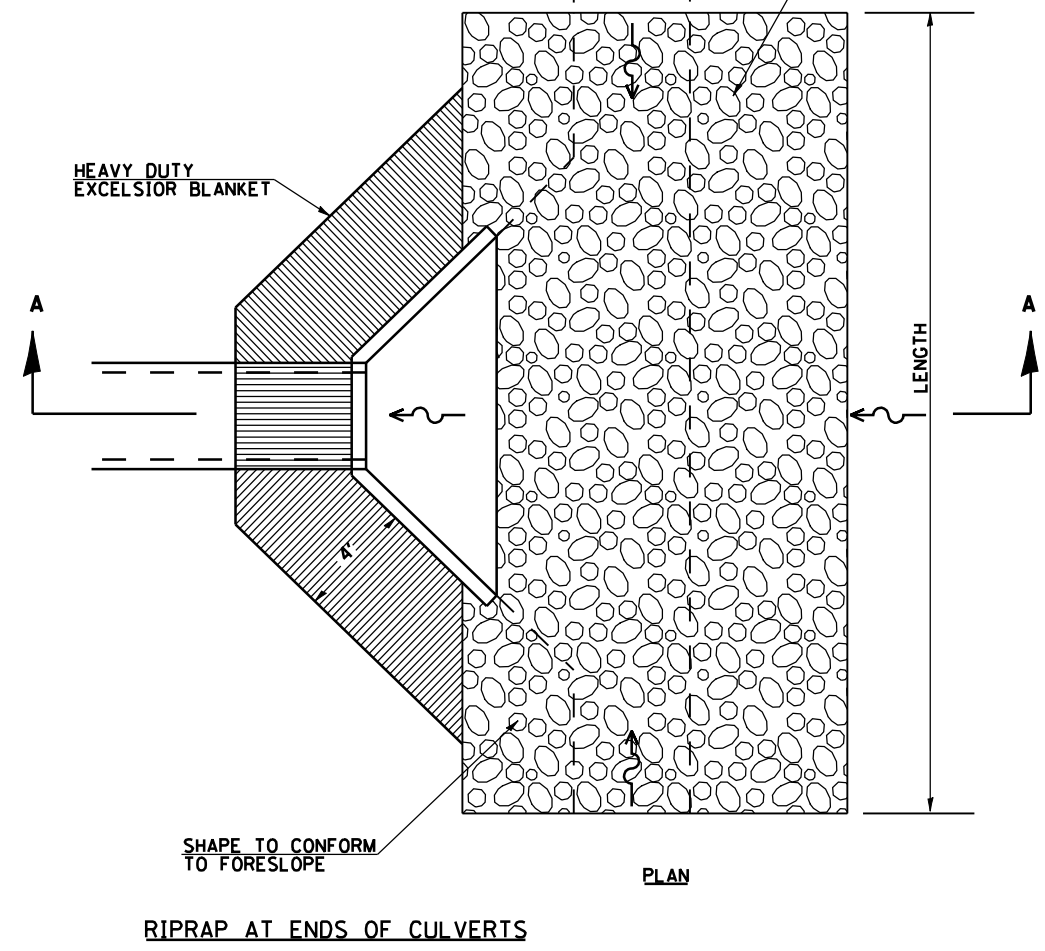
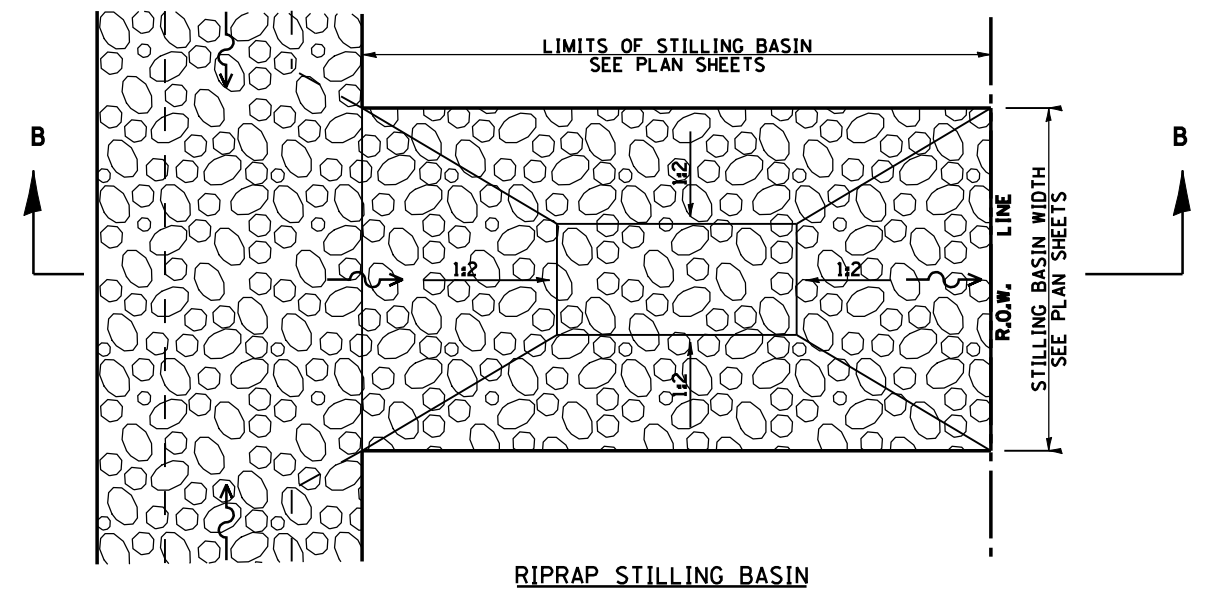
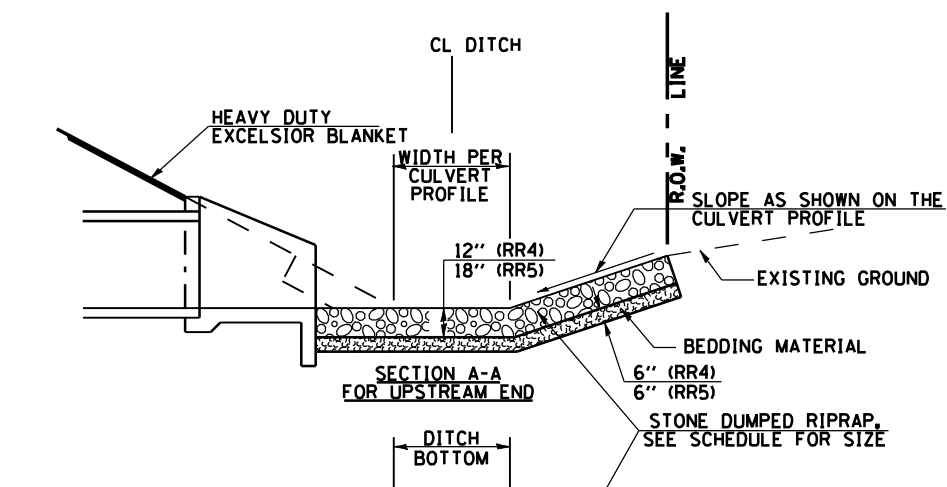
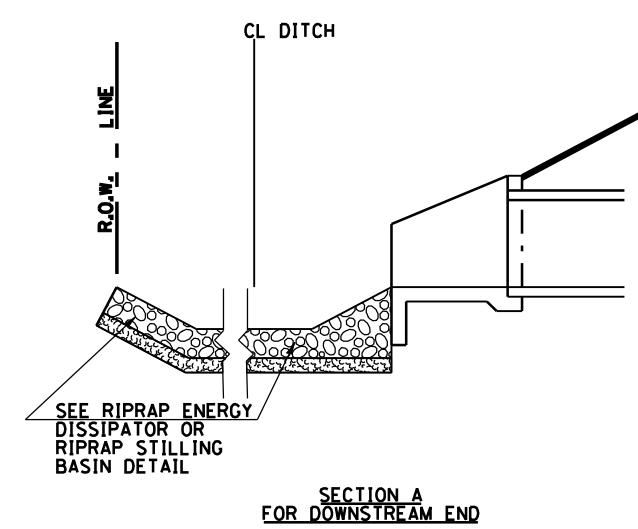


| | | | | |
|---------------------|---------|----------|------------------|-----------|
| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| 315 | 34-4 | HANCOCK | 452 | 272 |
| FED. ROAD DIST. NO. | | ILLINOIS | FED. AID PROJECT | |
| D-98-591-02 | | | | |

CONTRACT NO. 72680

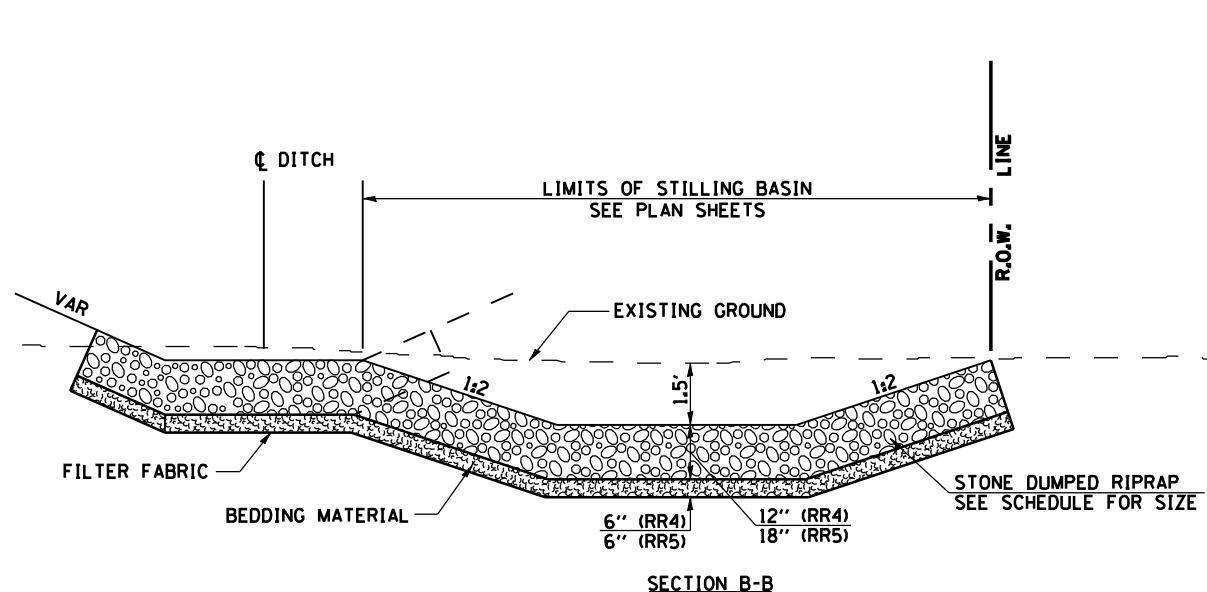

- NOTES:**
- STILLING BASINS SHALL BE CONSTRUCTED AT THE SAME TIME AS THE CULVERT OR DITCH.
 - ENERGY DISSIPATING BASINS ARE TO BE CONSTRUCTED AT LOCATIONS INDICATED WITH THE FOLLOWING SYMBOL [SB]
 - RIPRAP STILLING BASINS SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 281 OF THE STANDARD SPECIFICATIONS.
 - THE EXACT LENGTH, WIDTH, AND DEPTH FOR RIPRAP PLACEMENT WILL BE DETERMINED BY THE ENGINEER.
 - THE RIPRAP MATERIAL SHALL CONFORM TO CLASS A QUALITY.
 - FILTER FABRIC WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD FOR FILTER FABRIC FOR USE WITH RIPRAP.

| REVISIONS | |
|-----------|------|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION

**FAP ROUTE 315
SPECIAL DETAILS
RIPRAP AT ENDS OF CULVERT
RIPRAP STILLING BASIN**

DRAWN BY JCG
CHECKED BY JRB

DATE 1/31/06