


DIAPHRAGM ELEVATION AT ABUTMENT

Notes:
 Reinforcement bars in diaphragm are billed with superstructure on sheet 6 of 15.
 Concrete in diaphragm is included with Concrete Superstructure on sheet 6 of 15.
 For details of bar s(E) see sheet 6 of 15.
 The s(E) bars shall be placed parallel to the beams. Spacing for these bars shall be at right angles to the beams.
 For placement of v(E) bars see sheet 12 of 15.

MIN. BAR LAP
 #6 bar = 2'-9"

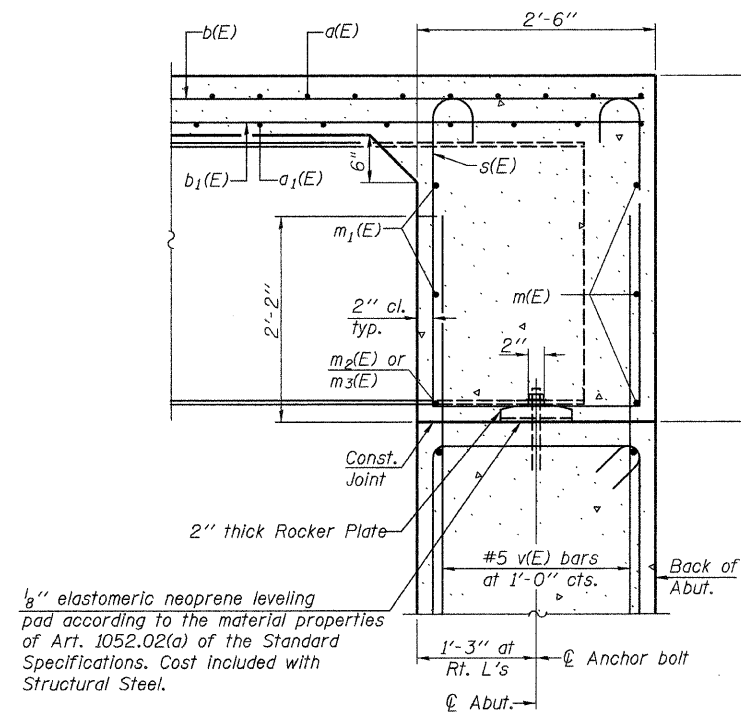

SECTION A-A
 Dimensions at right angles to abutment, except as shown.

DIAPHRAGM DETAILS
 COUNTY HIGHWAY 10 OVER
 FOUNTAIN CREEK TRIBUTARY
 SEC. 07-00216-01-BR
 IROQUOIS COUNTY
 STATION 20+02.60