


CROSS SECTION  
(LOOKING EAST)

HOT-MIX ASPHALT MIXTURE REQUIREMENTS				
		MIXTURE TYPE	AC TYPE	AIR VOIDS
TEMPORARY PAVEMENT	TOP 2"	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (IL 9.5 mm)	PG 64-22	4% @ 50 GYR
	BOTT. 6"	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50 (IN 2 LIFTS)	PG 64-22**	4% @ 50 GYR

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN.  
\*\* WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22.

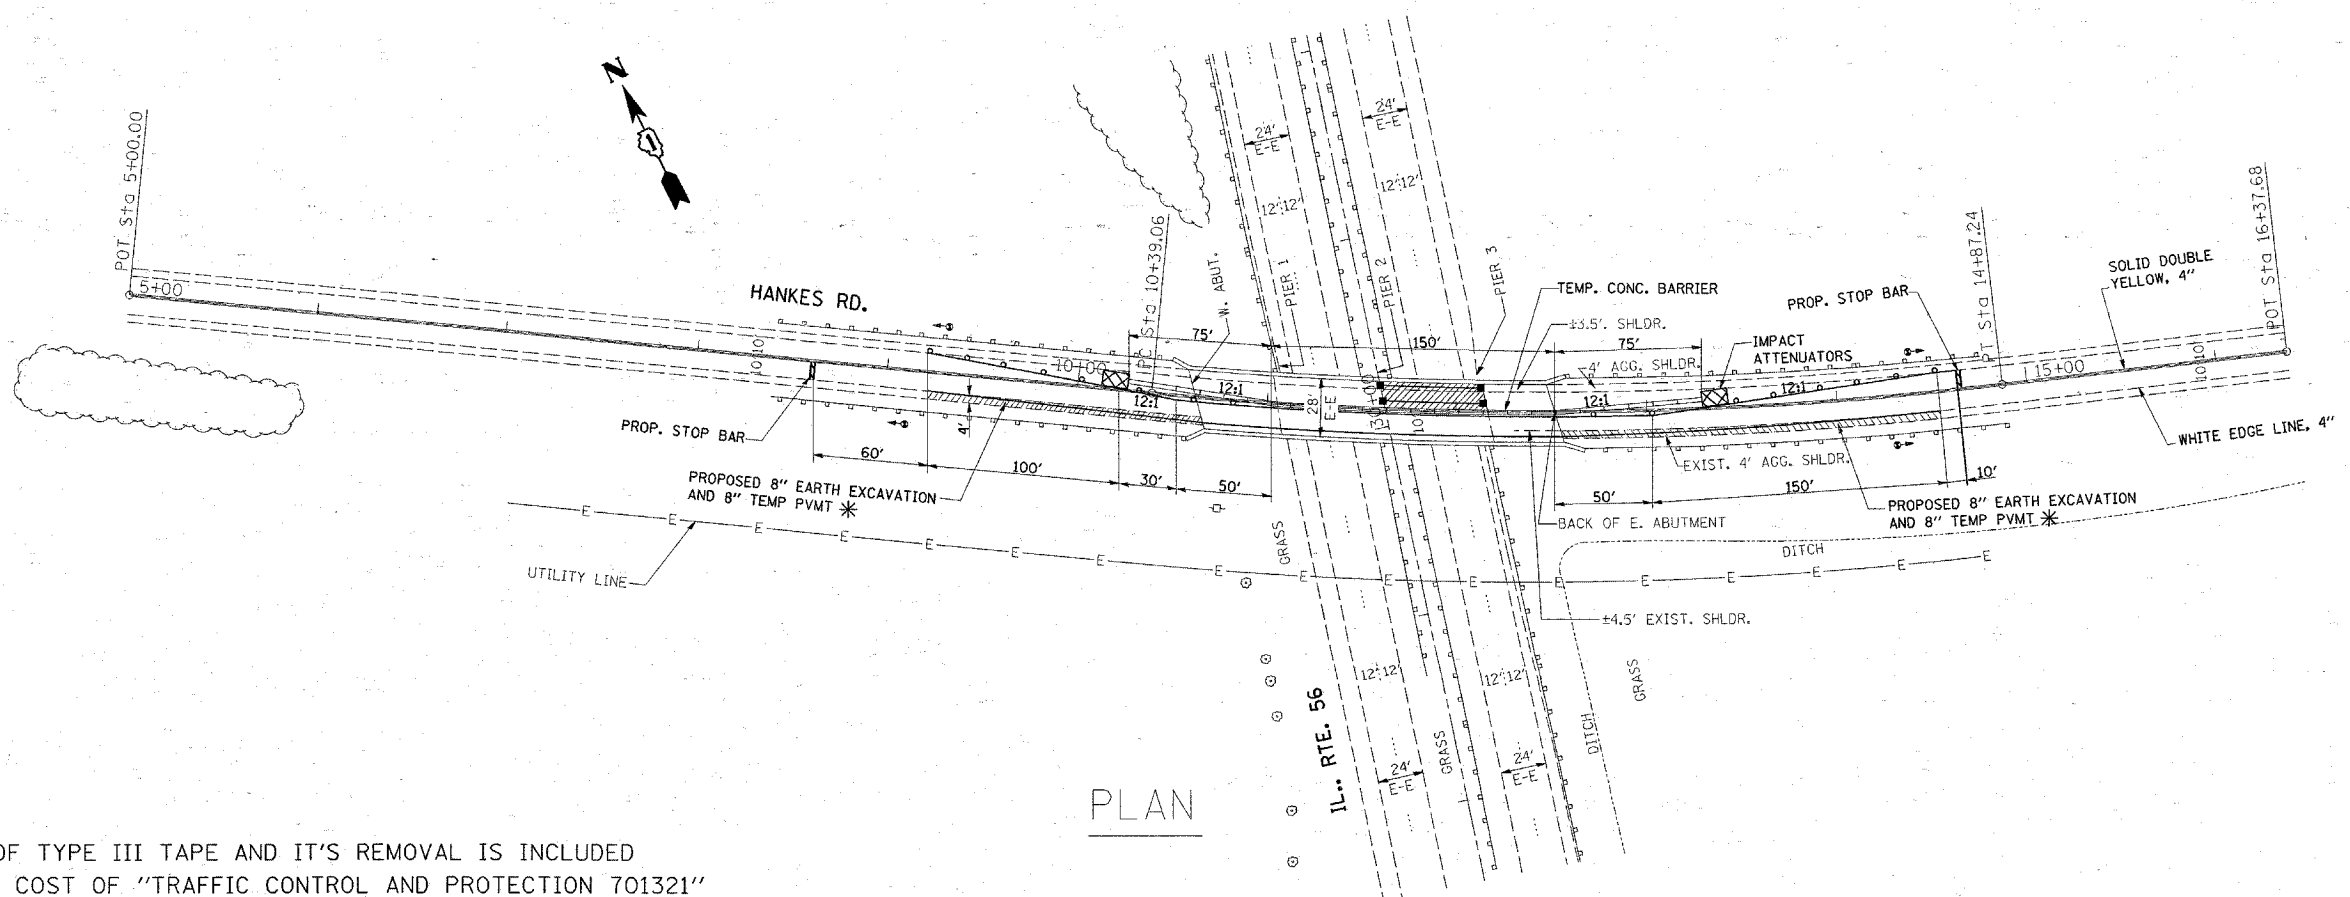

PLAN

NOTE:  
COST OF TYPE III TAPE AND IT'S REMOVAL IS INCLUDED IN THE COST OF "TRAFFIC CONTROL AND PROTECTION 701321"

FILE NAME =	USER NAME = sharanu	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TRAFFIC STAGING PLAN</b>			F.A. RTE. =	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ct:\pro\jacta\dl33888\design_00.dgn		DRAWN -	REVISED -					573	61 HB-I-6	KANE	14	9
PLOT SCALE = 50.0000' / IN.		CHECKED -	REVISED -		SCALE: SHEET NO. OF SHEETS STA. TO STA.			CONTRACT NO. 60E17				
PLOT DATE = 4/10/2008		DATE -	REVISED -		FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT							