



F. A. P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
613	(B)RS-5	BUREAU	22	16
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

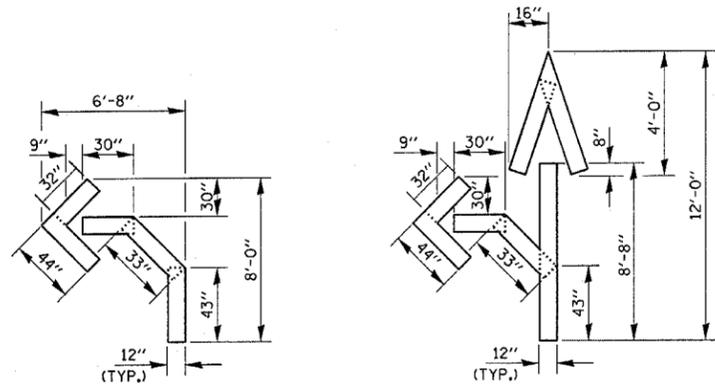


QUANTITY
12" LINE = 16 LIN. FT.
OR 4" LINE = 48 LIN. FT.

QUANTITY
12" LINE = 29 LIN. FT.
OR 4" LINE = 87 LIN. FT.

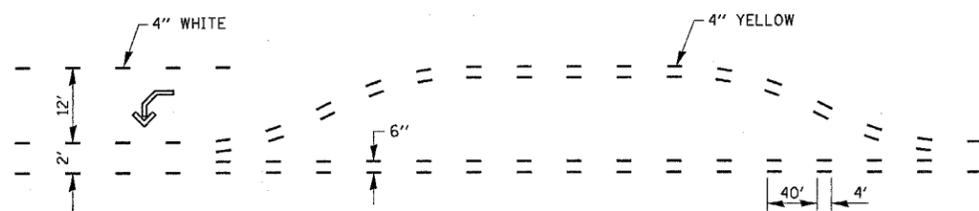



SHORT-TERM PAVEMENT MARKING FOR MEDIANS AND ARROWS

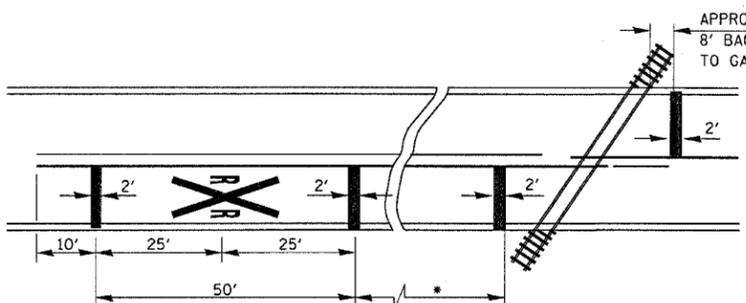


* MINIMUM DISTANCE
400' FOR 55 MPH
250' FOR 45 MPH
100' FOR 35 MPH OR LESS

PAVEMENT MARKINGS AT RAILROAD-HIGHWAY GRADE CROSSING


NOTES:
THE TRANSVERSE SPREAD OF THE 'X' MAY VARY ACCORDING TO LANE WIDTH.
ON MULTI-LANE ROADS, THE STOP LINES SHALL EXTEND ACROSS ALL APPROACH LANES AND SEPARATE RXR SYMBOLS SHALL BE PLACED ADJACENT TO EACH OTHER IN EACH LANE.




MEDIAN END TREATMENT

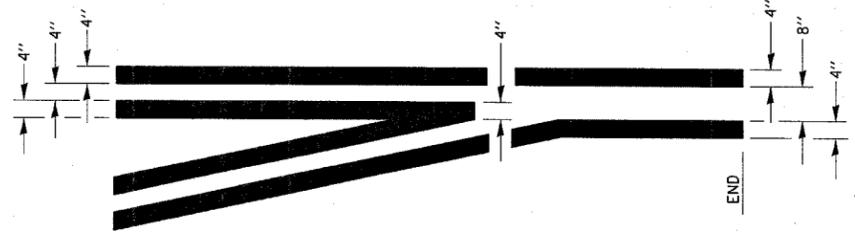


TYPICAL APPLICATION @ LEFT TURN LANES

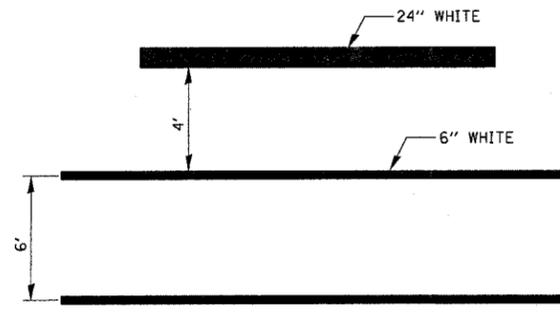


TYPICAL SPACING DETAIL FOR CROSSWALKS AND STOP BARS

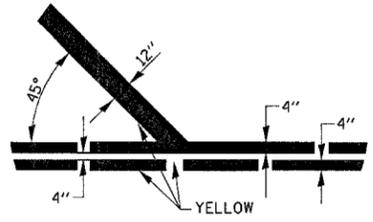

DIAGONAL LINES @ MEDIANS



SKIP DASH LINES @ LEFT TURN LANES

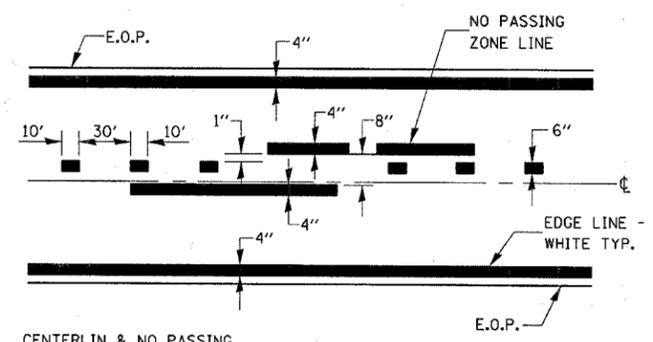

CENTERLINE & NO PASSING ZONE LINES - YELLOW
(SEE TYPICAL SECTIONS)

PAVEMENT MARKING

Mar 14, 2008 - 10:24:46 AM
c:\projects\ed01507\detail.dgn