



TYPICAL ROADWAY TRANSVERSE SECTION WITH HANDHOLE ON SLOPE NOT TO SCALE



CONDUIT IN TRENCH NOT TO SCALE



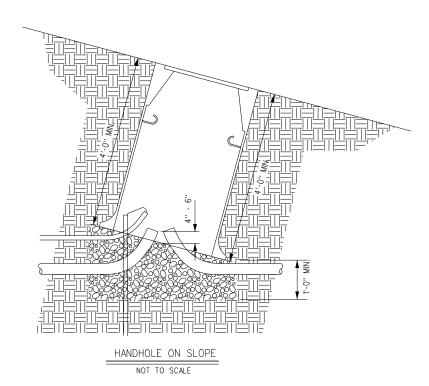

	FILE NAME =	USER NAME = dmcclintock	DESIGNED -	DJM	REVISED -
읍	c:\pwise_work\do_not_delete\dms01359\D2F	ACKE-IT-sht-ITS500.sht	DRAWN -	DJM	REVISED -
NE.	c:\pwise_work\do_not_delete\dms01359\D2F	PLOT SCALE = NA	CHECKED -	SPG	REVISED -
앂		PLOT DATE = 3/6/2014	DATE -	3/6/2013	REVISED -

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

ITS DETAILS **ADDITIONAL HANDHOLE DETAILS** AND CONDUIT DETAILS SHEET NO. II OF II SHEETS STA.

SCALE: NA

COUNTY ROCK ISLAND 217 137 CONTRACT NO. 64J68 ILLINOIS FED. AID PROJECT

GENERAL NOTES

- 1. MATERIALS AND METHODS OF CONSTRUCTION SHALL BE IN ACCORDANCE WITH CURRENT STANDARDS AND SUPPLEMENTAL SPECIFICATIONS.
- 2. REFER TO APPROPRIATE STANDARD ROAD PLANS AND PROJECT PLANS FOR ADDITIONAL DETAILS.
- 3. PULL BOXES SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS AND AS INDICATED HEREIN.
- 4. COVERS OF HANDHOLES INSTALLED IN LOCATIONS SUBJECT TO PEDESTRIAN TRAFFIC SHALL HAVE AN APPROVED ANTI-SKID PATTERN.
- 5. CONDUIT SIZES FOR ALL DETAILS SHALL MATCH THOSE INDICATED ON THE PLANS.
- 6. THE DETAILS INDICATED HEREIN ARE FOR THE INSTALLATION OF A PRECAST HANDHOLE WITH COVER FOR ELECTRICAL WIRING AND CONDUIT.
- 7. SLOTS FOR CONDUIT ACCESS MAY BE CAST AT 90 DEGREE SPACING, AS SHOWN, OR CAST ONLY AS NECESSARY FOR CONDUIT INSTALLATION AS PROJECT PLANS REQUIRES. SLOTS SHALL BE GROUTED WITH MORTAR AFTER NECESSARY CONDUITS ARE INSTALLED.
 CABLE HOOKS MAY BE PRECAST WITH
 HANDHOLE OR MAY BE INSTALLED AS NECESSARY BY A METHOD APPROVED BY THE ENGINEER.
- 8. CABLE HOOKS AND HANDLING LOOPS SHALL BE GALVANIZED IN ACCORDANCE WITH CURRENT
- 9. ACCESS CONDUIT SHALL BE THE SAME AS REQUESTED FOR THE CIRCUIT DUCTS UNLESS OTHERWISE SPECIFIED.
- 10. DIRECT BURY CABLE INSTALLATIONS ARE NOT ALLOWED UNLESS DIRECTED BY THE ENGINEER.
- 11. THE TYPE, SIZE, AND LOCATION OF ELECTRICAL ROADWAY DUCTS WILL BE SHOWN ON THE PROJECT PLANS. ROADWAY CROSSINGS SHALL BE INSTALLED AS SHOWN HEREON UNLESS OTHERWISE SPECIFIED OR DIRECTED BY THE ENGINEER.
- 12. CROSSINGS ARE TO BE PLACED WITHOUT DISTURBING THE EXISTING ROADWAY SURFACE BY JACKING OR BORING METHODS APPROVED BY THE ENGINEER NO ACCESS TO DUCT OR JACKING OF DUCT FROM MEDIAN WILL BE ALLOWED WITHOUT THE SPECIFIC APPROVAL OF THE ENGINEER.

SECTION

(8I-I)M

5756