


teaslequick  
2/7/2005  
c:\projects\74049d\03004pa.dgn  
SCH

FAP RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
781	(12,17Z)RS-2	CRAWFORD	18	5
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT NO.	
CONTRACT NO. 74049				

RESURFACING SCHEDULE

STATION TO STATION	LENGTH	AVERAGE PAVEMENT WIDTH	AREA	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE MIX "D", N90	BITUMINOUS SURFACE REMOVAL, 1 1/2"	TEMPORARY RAMP
	LIN FT	FEET	SQ YD	GALLON	TON	TON	SQ YD	SQ YD
1141+07.00 TO 1143+00.00	193.0	34.5	739.8	74.0	1.5	62.1	739.8	16.1
1143+00.00 TO 1153+00.00	1000.0	40.0	4444.4	444.4	8.9	373.3	4444.4	
1153+00.00 TO 1153+50.00	50.0	46.0	255.6	25.6	0.5	21.5	255.6	
1153+50.00 TO 1154+50.00	100.0	52.0	577.8	57.8	1.2	48.5	577.8	
1154+50.00 TO 1156+50.00	200.0	46.0	1022.2	102.2	2.0	85.9	1022.2	
1156+50.00 TO 1166+35.00	985.0	40.0	4377.8	437.8	8.8	367.7	4377.8	
1166+35.00 TO 1170+90.00	455.0	45.5	2300.3	230.0	4.6	193.2	2300.3	
1170+90.00 TO 1173+15.00	225.0	51.0	1275.0	127.5	2.6	107.1	1275.0	
1173+15.00 TO 1175+15.00	200.0	57.0	1266.7	126.7	2.5	106.4	1266.7	
1175+15.00 TO 1175+82.00	67.0	63.0	469.0	46.9	0.9	39.4	469.0	
1175+82.00 TO 1176+72.00	90.0	57.0	570.0	57.0	1.1	47.9	570.0	
1176+72.00 TO 1180+10.00	338.0	51.0	1915.3	191.5	3.8	160.9	1915.3	
1180+10.00 TO 1183+96.00	386.0	43.5	1865.7	186.6	3.7	156.7	1865.7	
1183+96.00 TO 1191+01.00	705.0	36.0	2820.0	282.0	5.6	236.9	2820.0	
1191+01.00 BK=0+00.00 AH 0+00.00 TO 19+47.00	1947.0	36.0	7788.0	778.8	15.6	654.2	7788.0	17.8
TOTALS	6941.0	699.0	31688.0	3169.0	63.0	2662.0	31688.0	34.0

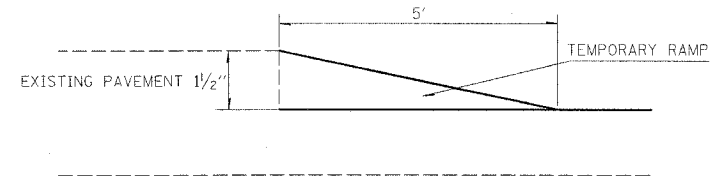

TEMPORARY RAMP DETAIL  
STA 1141+07 TO STA 1141+12  
STA 19+42 TO STA 19+47

PAVEMENT MARKING SCHEDULE

STATION TO STATION	LENGTH	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS		THERMOPLASTIC PAVEMENT MARKING - LINE 4"	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	TEMPORARY PAVEMENT MARKING - LETTERS AND SYMBOLS		TEMPORARY PAVEMENT MARKING - LINE 4"	TEMPORARY PAVEMENT MARKING - LINE 6"	TEMPORARY PAVEMENT MARKING - LINE 12"	TEMPORARY PAVEMENT MARKING - LINE 24"	SHORT-TERM PAVEMENT MARKING	WORK ZONE PAVEMENT MARKING REMOVAL	RAISED REFLECTIVE PAVEMENT MARKER	
		FOOT	SQ FT					FOOT	FOOT								FOOT
1140+87.00 TO 1143+24.00	237.0			975.0		135.0				975.0		135.0			96.0	16.0	12.0
1143+24.00 TO 1153+50.00	1026.0	70.4	2565.0					70.4	2565.0						416.0	69.3	52.0
1153+50.00 TO 1154+50.00	100.0	35.2	250.0	100.0				35.2	250.0	100.0					72.0	12.0	9.0
1154+50.00 TO 1170+90.00	1640.0	123.2	4100.0					123.2	4100.0						656.0	109.3	82.0
1170+90.00 TO 1173+50.00	260.0	17.6	650.0	65.0				17.6	650.0	65.0					168.0	28.0	17.0
1173+50.00 TO 1175+15.00	165.0		412.5	82.5					412.5	82.5					128.0	21.3	10.0
1175+15.00 TO 1175+80.00	65.0	35.2	162.5	81.3				35.2	162.5	81.3					64.0	10.7	7.0
1175+80.00 TO 1180+10.00	430.0	17.6	1075.0	107.5				17.6	1075.0	107.5					264.0	44.0	27.0
1180+10.00 TO 1183+96.00	386.0	35.2	965.0					35.2	965.0						160.0	26.7	20.0
1183+96.00 TO 1185+55.00	159.0		664.0		62.0				664.0		62.0				64.0	10.7	8.0
1185+55.00 TO 1185+65.00	10.0		20.0						20.0								
1185+65.00 TO 1186+40.00	75.0	17.6	150.0	75.0		25.0	17.6	150.0	75.0		25.0		25.0	32.0	5.3	6.0	
1186+40.00 TO 1187+37.00	97.0			73.0		11.0				73.0		11.0		32.0	5.3		
1187+37.00 TO 1188+18.00	81.0		364.0			47.0			364.0			47.0		64.0	10.7	12.0	
1188+18.00 TO 1188+92.00	74.0	17.6	148.0				17.6	148.0									
1188+92.00 TO 1190+51.00	159.0		397.5					159.0	397.5					64.0	10.7	8.0	
1190+51.00 TO 1191+01.00	50.0	17.6	125.0					17.6	125.0					16.0	2.7	2.0	
1191+01.00 BK=0+00.00 AH 0+00.00 TO 16+71.00	1671.0	123.2	4177.5	86.0			123.2	4177.5	86.0					672.0	112.0	84.0	
16+71.00 TO 18+20.00	149.0		627.0		59.0			149.0	627.0		59.0			64.0	10.7	8.0	
18+20.00 TO 18+30.00	10.0		20.0					10.0	20.0								
18+30.00 TO 19+30.00	100.0	17.6	200.0	100.0		23.0	17.6	200.0	100.0			23.0		48.0	8.0	9.0	
19+30.00 TO 19+47.00	17.0			70.0				17.0	70.0								
TOTALS		528.0	18048.0	840.0	303.0	59.0	528.0	18048.0	840.0	303.0	59.0	3080.0	513.0			373.0	

CLASS D PATCHING SCHEDULE

LOCATION	LANE	LENGTH	WIDTH	CLASS D PATCHES, TYPE IV, 10 INCH SQ YD
		FOOT	FOOT	
1188+55	EB	110.0	7.5	91.7
TOTAL				92.0

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**SCHEDULES**  
SCALE: VERT.  
HORIZ.  
DATE  
DRAWN BY  
CHECKED BY