

## STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths							
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7''	2'-11''	
5	1'-9''	2'-5"	2'-7''	2'-11''	3'-3''	3'-8''	
6	2'-1''	2'-11''	3'-1''	3′-6′′	3′-10′′	4'-5''	
7	2'-9''	3'-10''	4'-2"	4'-8''	5′-2′′	5′-10′′	
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	6′-9′′	7′-8′′	
9	4'-7''	6′-5′′	6'-10''	7'-9''	8'-7''	9'-8''	

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C


Table 5: Epoxy bar, Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length +  $1^{l_2}$ " + thread length


\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

l ocation	Bar	No. assemblies	Table for minimum
Locarion	size	required	lap length
Superstructure	#5	276	Table 3
E. Approach	#5	61	Table 3
E. Approach	#4	30	Table 3
W. Approach	#5	86	Table 3
W. Approach	#4	25	Table 3
Abutments	#9	48	Table 3
A but ments	#5	16	Table 3
Abutments	#6	10	Table 3

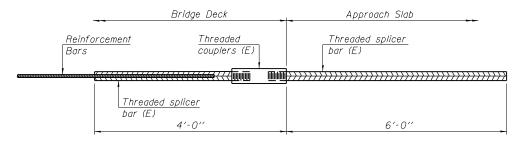

# BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS


No, required =

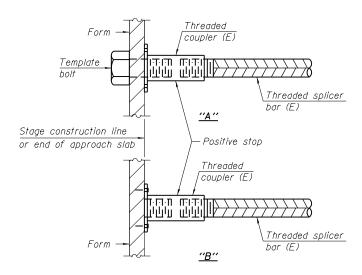

#### INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

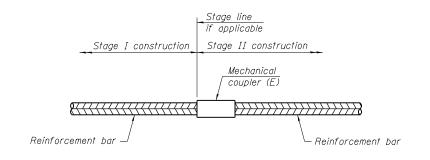

### STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required
Superstructure	#5	276

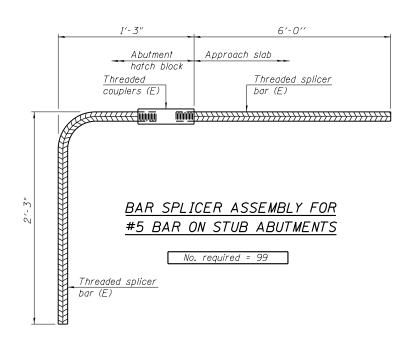

#### NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements

for reinforcement bars. See Section 508 of the Standard Specifications. See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1

1-27-12

_	USER
COLLINS 22 N. Mocker Dr. Suite 900 COLLINS 2014 900 ENGINEERS 2 Fax (312) 704-9320 ENGINEERS 2 Fax (312) 704-9320	
	PLOT
ILLINOIS PROFESSIONAL DESIGN FIRM LICENSE NO. 184-800993	PLOT

	USER NAME =	DESIGNED - AMS	REVISED	Γ
		CHECKED - LDB	REVISED	
•	PLOT SCALE =	DRAWN - DR	REVISED	
13	PLOT DATE =	CHECKED - JMH	REVISED	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BAR	SPLICER	ASSEMBLY STRUC			HANICAL 016–1323	SPLICER	DETAILS	
		SHEET NO	. SR38	OF SF	R41 SHEETS			

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0383	0303-474HB-R	соок	368	279
		CONTRACT	NO. 6	OF63
	THE THOSE FED. AT	ID DDO IECT		