



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
774	•	EFFINGHAM	273	23

FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT
 *107WRS-1, 107BY, 107BY-1 & 107B-2
CONTRACT NO. 94827

DITCH SCHEDULE							
STATION TO STATION	OFFSET	LENGTH	WIDTH	EROSION CONTROL	STONE RIPRAP	GABIONS	FILTER FABRIC FOR
				BLANKET	CLASS A4		USE W/ RIPRAP
		FEET	FEET	SQ YD	SQ YD	CU YD	SQ YD
951+40.00 - 952+00.00	LT	60	9	-	60	-	60
968+03.00 - 968+15.00	RT	12	19	25	-	-	-
968+15.00 - 969+00.00	RT	85	9	85	-	-	-
982+51.00 - 990+96.00	LT	845	9	-	845	-	845
982+60.00 - 991+13.00	RT	853	9	-	853	-	853
991+52.00 - 996+75.00	LT	523	9	-	523	-	523
991+71.00 - 996+75.00	RT	504	9	-	504	-	504
1020+00.00 - 1021+50.00	RT	150	9	-	150	-	150
1020+50.00 - 1021+00.00	LT	50	9	-	-	25	50
1020+50.00 - 1021+60.00	LT	110	9	-	110	-	110
1022+36.00 - 1023+43.00	LT	107	9	-	107	-	107
1023+50.00 - 1024+00.00	RT	50	9	50	-	-	-
1023+98.00 - 1025+50.00	LT	152	9	-	152	-	152
1024+00.00 - 1024+32.00	RT	32	9	-	32	-	32
1024+78.00 - 1027+50.00	RT	272	9	-	272	-	272
1034+70.00 - 1036+00.00	RT	153	9	-	-	76	153
1034+38.41 - 1037+00.00	LT	292	9	-	-	146	292
TOTALS				160	3,608	247	4,103

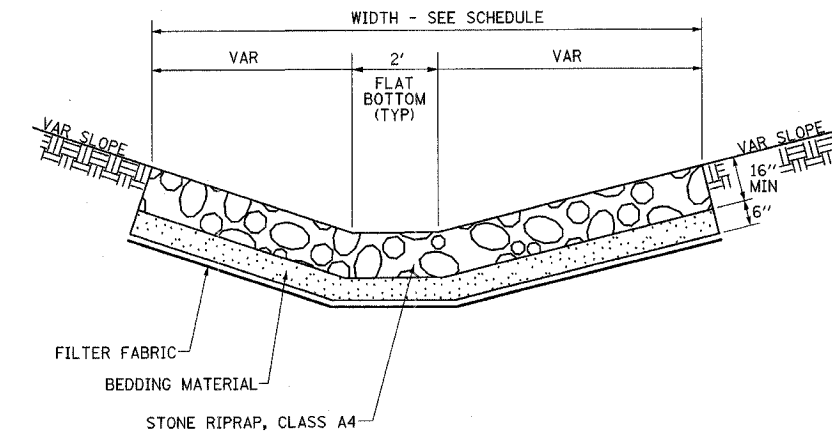

DETAIL OF STONE RIPRAP, CLASS A4

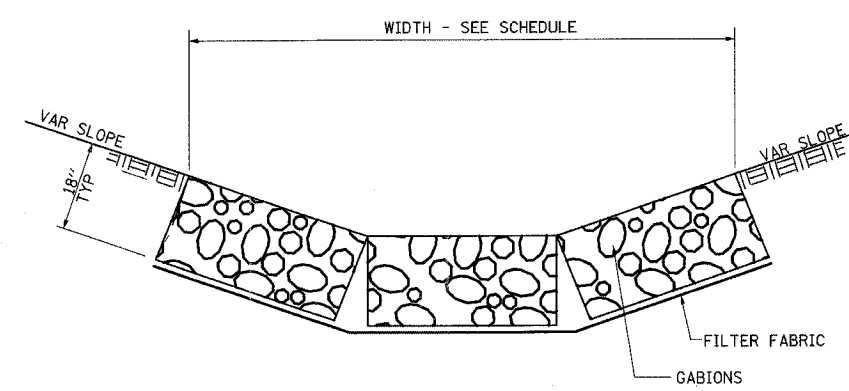

DETAIL OF GABIONS

(ASSUMED GABION BASKET SIZE OF 3'Wx6'Lx18"H AND/OR 3'Wx9'Lx18"H)

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 DITCH RIPRAP SCHEDULE AND DETAILS
 DRAWN BY MLO
 CHECKED BY TGC
 DATE 8/02