


PLAN

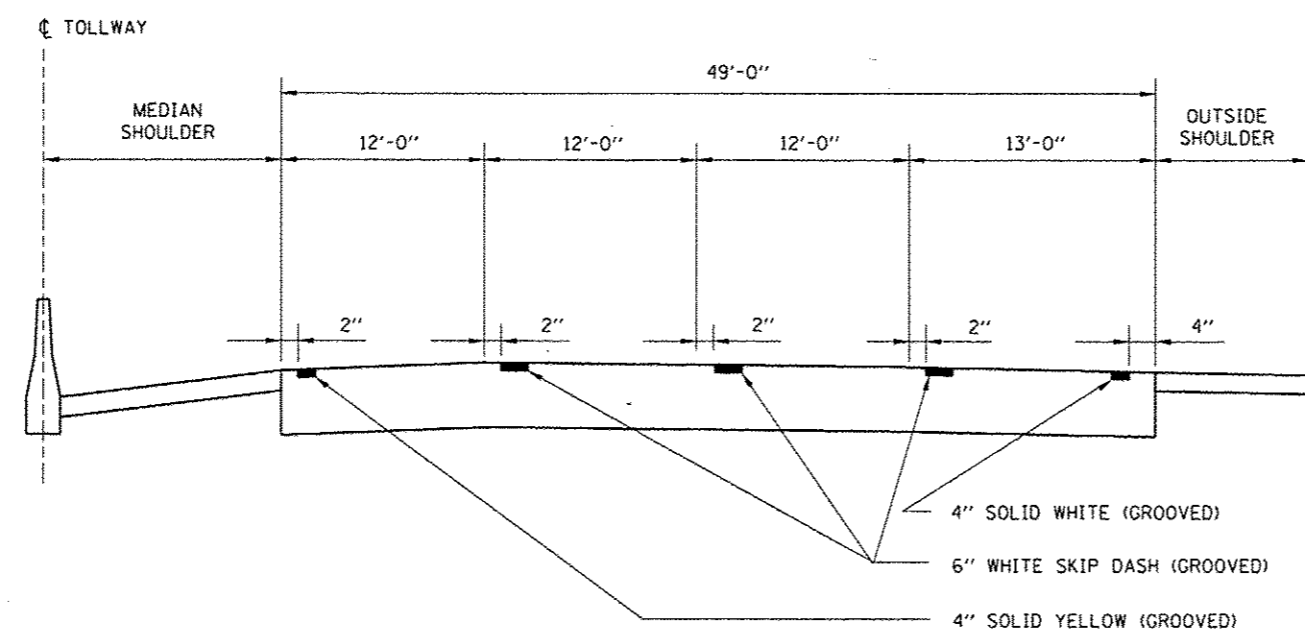

SECTION A-A

GENERAL NOTES:

1. DIAGONAL SHOULDER STRIPING REQUIRED WHERE HMA SHOULDER WIDTH IS LESS THAN STANDARD.
2. ROADWAY MARKING MATERIALS TO BE USED ON FINISHED CONCRETE SURFACE AND HOT-MIX ASPHALT SURFACE SHALL BE AS SHOWN ON THE PLANS.
3. WHERE THE GUARDRAIL ENCLOSES ON THE SHOULDER THE DIAGONAL MARKINGS SHALL EXTEND AS CLOSE TO THE FACE OF THE RAIL AS POSSIBLE.
4. ALL LANE LINES AND EDGE LINES SHALL BE GROOVED.
5. DIAGONAL STRIPING SHALL BE SURFACE APPLIED.
6. GORE STRIPING (CHEVRON) SHALL BE SURFACED APPLIED.

ROADWAY AND SHOULDER STRIPING - NEW CONSTRUCTION

CONTRACT 60I31 SHEET 929 OF 963



DATE	REVISIONS
9-19-2007	STRIPING LOCATION @ OUTSIDE LANE
7-1-2009	ADDED LINE GROOVING NOTES
2-7-2012	REVISED NOTES

PERMANENT PAVEMENT MARKINGS

STANDARD D5-03

APPROVED *Paul Kovacs* CHIEF ENGINEER DATE 7-1-2009...